STEREO INTEGRATED AMPLIFIER/TUNER

R-A100/A150/V300/V350

SERVICE MANUAL

KENWOOD

© 1997-9/B51-5369-00 (K/K) 3653

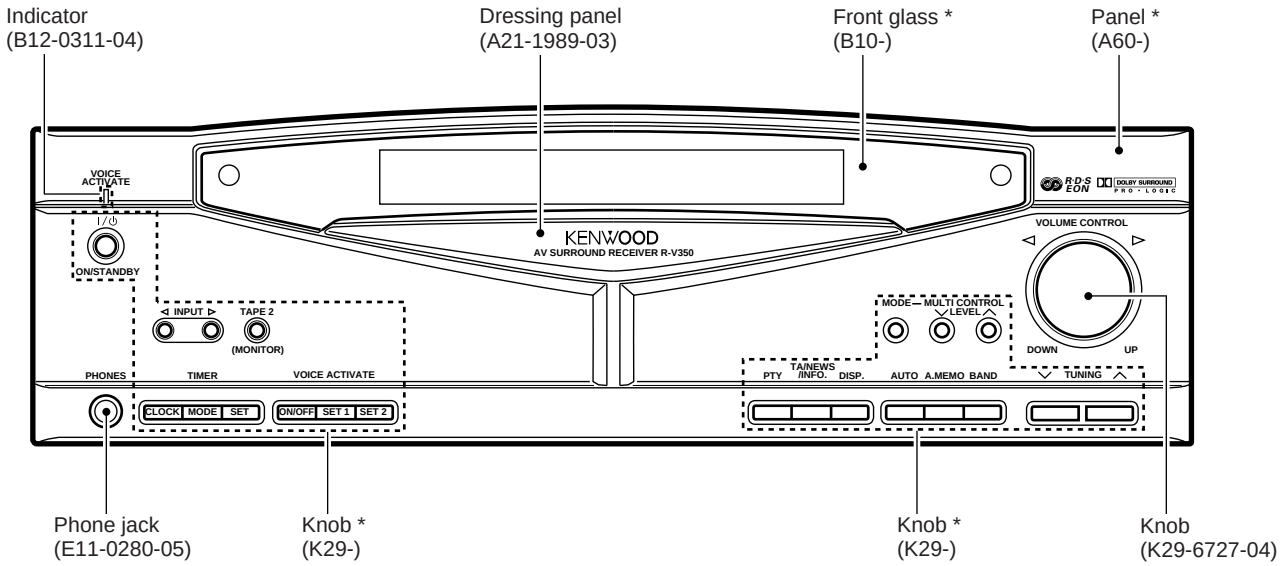

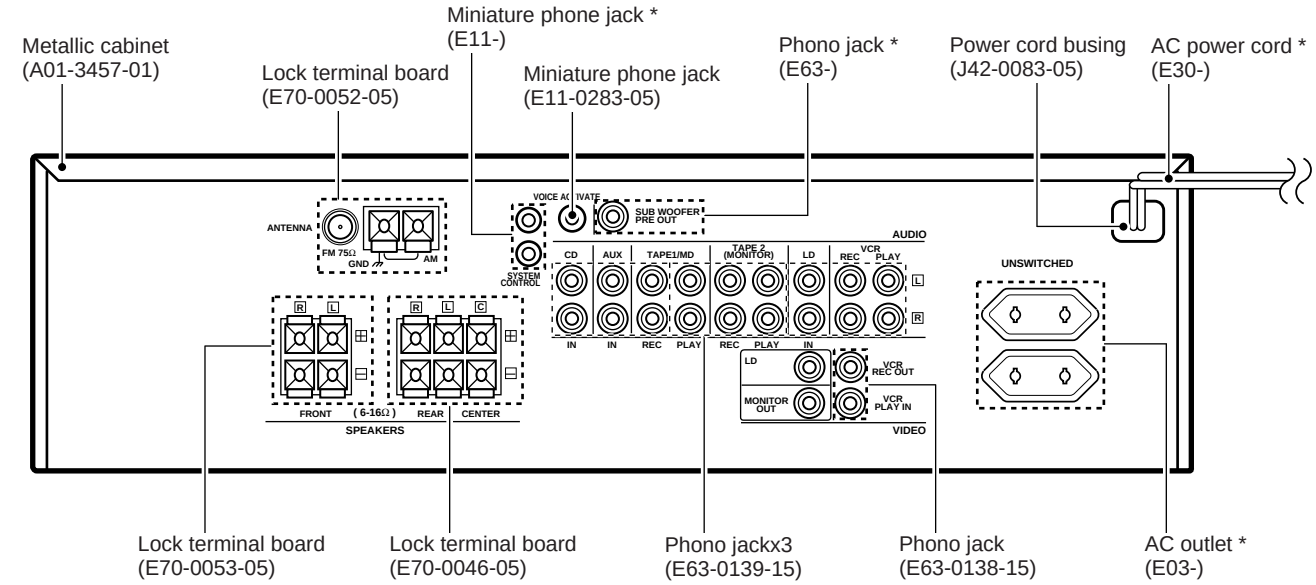

Illustration is R-V350.

*** Refer to parts list on page 41.**

Caution : No connection of ground line if disassemble the unit.
Please connect the ground line on rear panel, PCBs, Chassis and some others.

CONTENTS / ACCESSORIES

Contents

CONTENTS / ACCESSORIES 2
EXTERNAL VIEW 3
CIRCUIT DESCRIPTION 6
ADJUSTMENT 10
PC BOARD 12
SCHEMATIC DIAGRAM 19
EXPLODED VIEW 39
PARTS LIST 41
SPECIFICATIONS 53

Accessories (R-A100/A300/V300/V350)

FM indoor antenna(1)
(T90-0809-05) R-A100/R-V300 : IYMCX type
(T90-0810-05) R-A150/R-V300/V350 : EKPT type



AM loop antenna(1) (T90-0820-05)



Loop antenna stand(1)
(J19-3645-05)



Cable tidy(2)
(F07-1602-04)

Microphone(1)
(W01-0935-05)



Graphical Remote Control unit(1) *
(A70-1159-05) GRC-150 (R-V300 KP type)



Batteries(R03/AAA) (4)



Battery cover (A09-0379-08)

Remote control unit(1) *
(A70-1136-05) RC-S0504 (R-V350)
(A70-1150-05) RC-S0503 (R-V300) IYMCX type
Battery cover (A09-0378-08)



(A70-1149-05) RC-S0300 (R-A100/A150)
Battery cover (A09-0357-08)

Batteries(R6/AA) (2)
(Except U.S.A. and Canada)



*AC plug adapter (1)
(E03-0115-05)



* Use to adapt the plug on the power cord to the shape of the wall outlet.(Accessory only for regions where use is necessary)

EXTERNAL VIEW

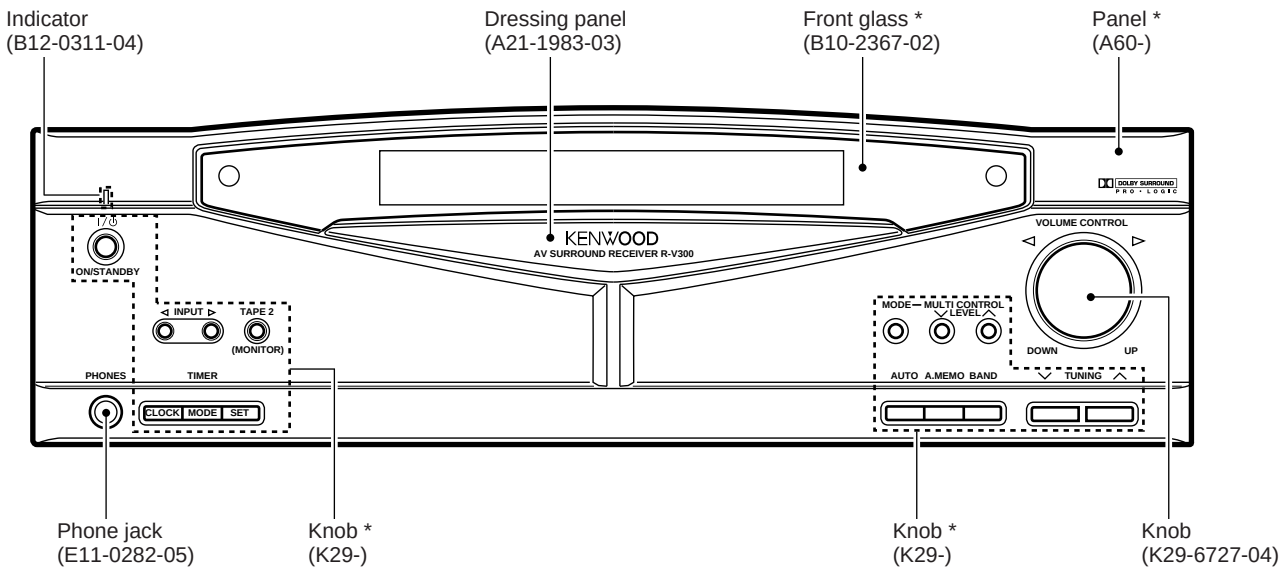

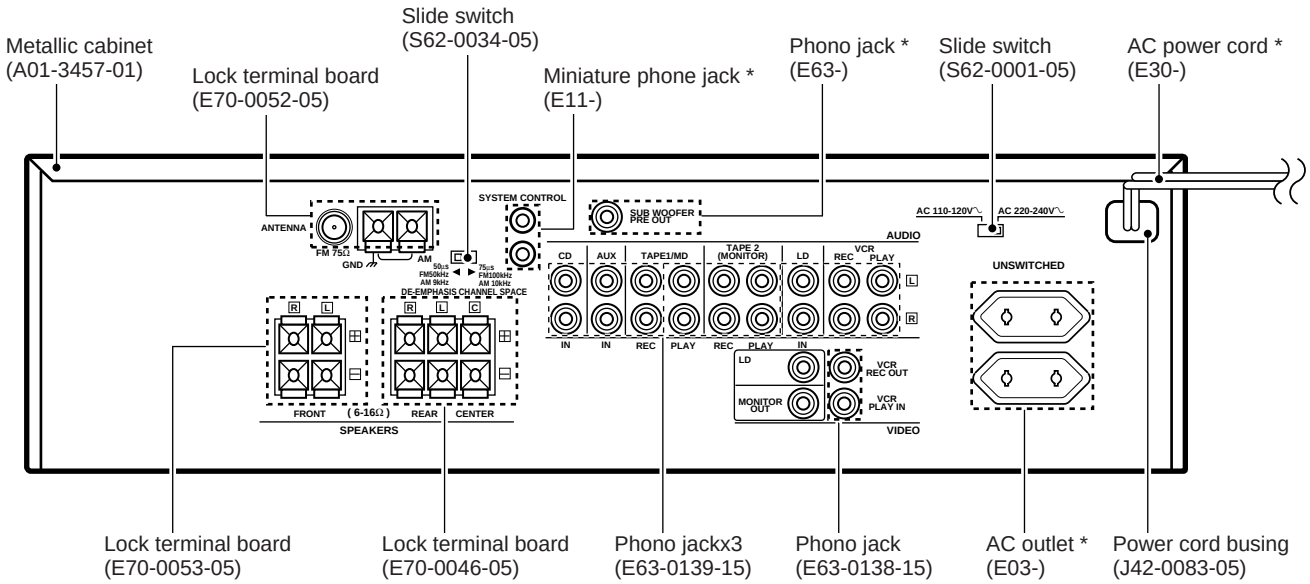

Illustration is R-V300.

*** Refer to parts list on page 41.**

EXTERNAL VIEW

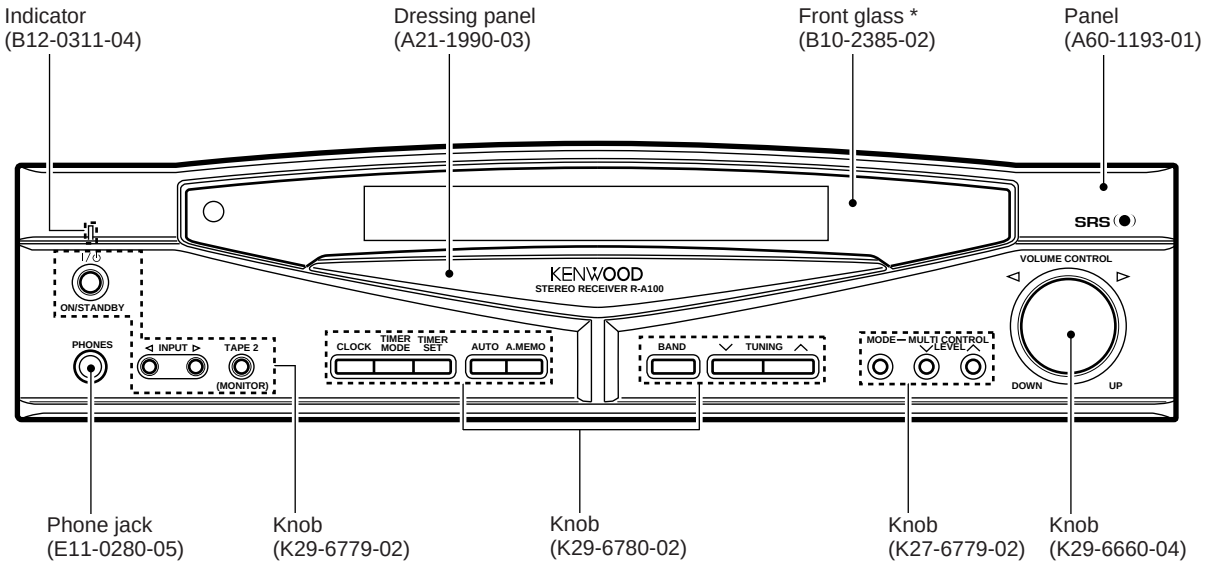

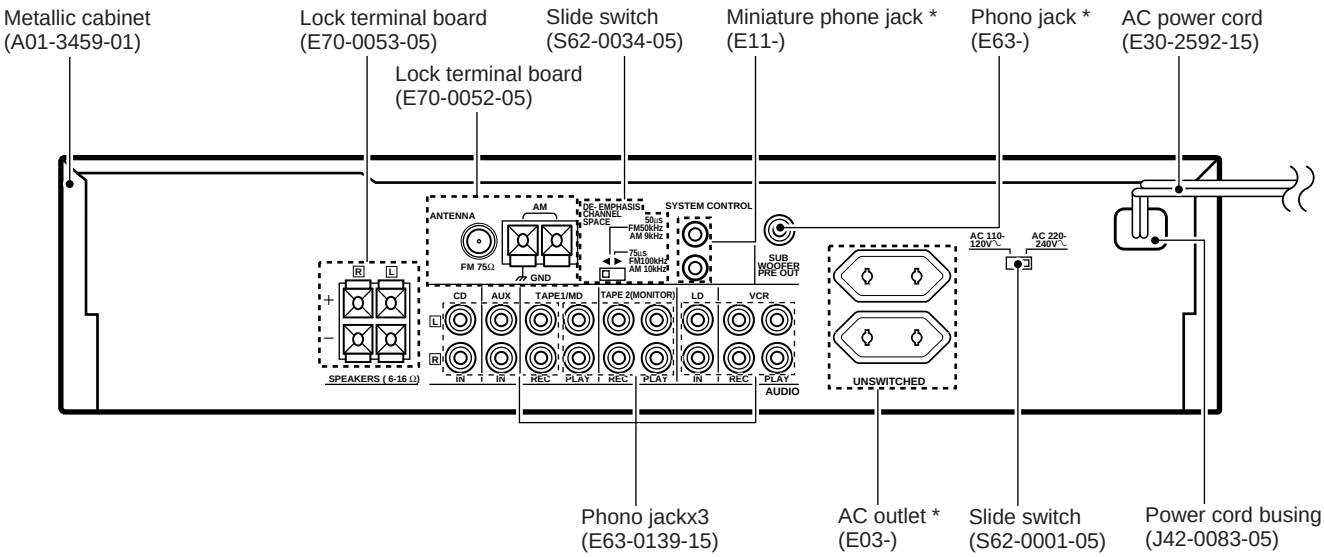

Illustration is R-A100.

*** Refer to parts list on page 41.**

EXTERNAL VIEW

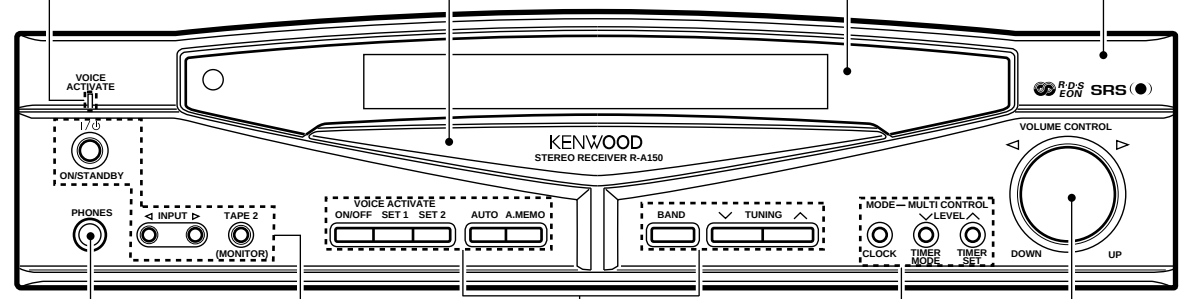

Indicator (B12-0311-04)
Dressing panel (A21-1984-03)
Front glass (B10-2347-02)
Panel (A60-1194-01)
Phone jack (E11-0280-05)
Knob (K27-6661-02)
Knob (K29-6662-02)
Knob (K27-6661-02)
Knob (K29-6660-04)

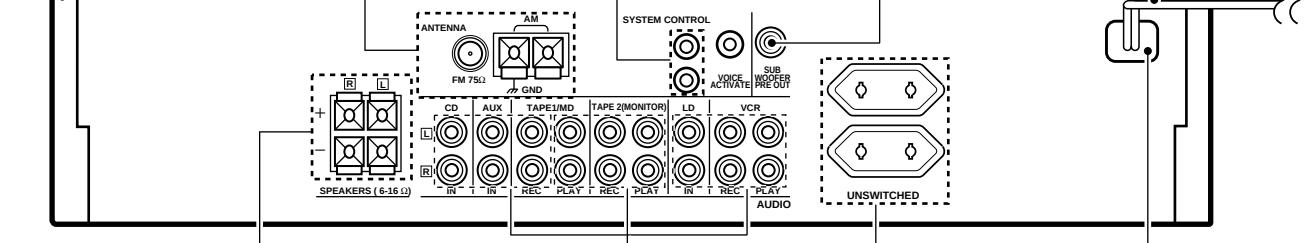

Metallic cabinet (A01-3459-01)
Lock terminal board (E70-0052-05)
Miniature phone jack * (E11-)
Phono jack * (E63-)
AC power cord * (E30-)
Lock terminal board (E70-0053-05)
Phono jackx3 (E63-0139-15)
AC outlet * (E03-)
Power cord busing (J42-0083-05)

Illustration is R-A150.

*** Refer to parts list on page 41.**

CIRCUIT DESCRIPTION

1. Back up data and initial data

POWER ON/OFF	: OFF
MAIN VOLUME LEVEL	: -65dB
AUDIO INPUT • SELECTOR	: TUNER
VIDEO INPUT • SELECTOR(R-V300/V350)	: VCR
TAPE1/MD	: TAPE1
TAPE2/MONITOR	: OFF
FL DISPLAY MODE	: SELECTOR
SOURCE DIRECT(R-V300/V350)	: OFF
SURROUND(R-V300/350)	: STEREO
DSP MODE(R-V300/V350)	: ARENA
SPEAKER CH.LEVEL(R-V300/V350)	: 0dB
BALANCE	: CENTER
DELAY(R-V300/V350)	: 20ms
EFFECT LEVEL(R-V300/V350)	: 3
TONE BASS	: 0dB
TONE TREBLE	: 0dB
INPUT LEVEL	: 0dB
SRS 3D(R-A100/A150)	: OFF
SRS 3D LEVEL(R-A100/A150)	: LEVEL 0
TUNING MODE(AUTO/MONO)	: AUTO
PRESET MEMORY(40ch)	: TEST PRESET FREQUENCY
LAST BAND	: FM
FM LAST FREQUENCY	: 87.5MHz
AM(MW) LAST FREQUENCY	: 531kHz (CH.SP 9kHz) : 530kHz (CH.SP10kHz)
LW LAST FREQUENCY	: 153kHz
LAST P.ch	: [--ch]
RDS DISPLAY MODE(R-A150/V300)	: FREQUENCY DISPLAY
TA/NEWS/INFO.(R-A150/V300)	: OFF
CLOCK DISPLAY	: AM 12:00
TIMER	: OFF
SLEEP TIMER	: OFF
VOICE ACTIVATE KEY WORD	: NON SPECIFIC SPEAKER(RD:KENWOOD)
VOICE ACTIVATE	: ON

2. Main microprocessor uPD780206GF025 (X14-, IC1) MIYCX type
uPD780206GF027 (X14-, IC1) KPTE type

2-1 Microprocessor periphery block diagram

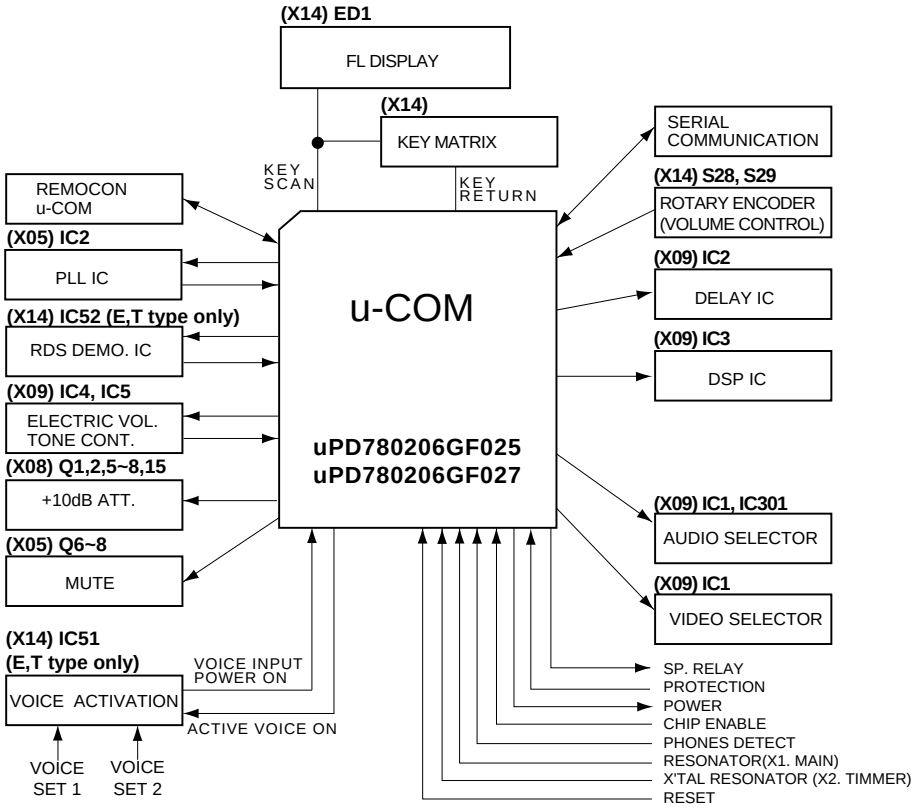

CIRCUIT DESCRIPTION

2-2 Key matrix

	② KR3	③ KR2	④ KR1	⑤ KR0
㉓ KS0	–	–	–	–
㉔ KS1	TUNING △	DISPLAY(RDS)	PTY	TA/NEWS/INFO
㉕ KS2	(MULTI MODE)	(MULTI LEVEL▽)	(MULTI LEVEL△)	–
	⌘ CLOCK	⌘ TIMER MODE	⌘ TIMER SET	–
㉖ KS3	TUNING ▽	AUTO MEMORY	BAND	AUTO
㉗ KS4	(VOICE ON/OFF)	(TIMER SET)	INPUT ◁	INPUT ▷
㉘ KS5	(CLOCK SET)	(TIMER MODE)	ON/STANDBY	TAPE2(MONITOR)
	⌘ VOICE ON/OFF			
KS6	–	–	–	–
㉛ KS7	DSW1(D29)	DSW2(D30)	DSW3(D31)	DSW4
㉜ KS8	–	–	–	DSW5(D34)

DSW1~DSW4 : Tuner distination

DSW5 : R-A100/A150 or R-V300/V350 Model distination

PTY,TA / NEWS / INFO / DISPLAY(RDS) : RDS function model (R-V350/A150)

( ) : R-V300 / V350 /A100 function

⌘ : R-A150 (E,T type) function

2-3 Pin description

No.	Name	I/O	Description	
1	Vdd	I	Power supply(+5V)	
2-5	KR3-0	I	Key return 3-0	
6,7,	ENC_VOL1,2	I	Encoder pulse detect1,2	
8	$\overline{\text{HP_DET}}$	I	Headphone detect	L: Yes
9	$\overline{\text{CE}}$	I	Chip enable	L: Enable
10	$\overline{\text{RESET}}$	I	Microprocessor reset	L: Reset
11,12	X1,2	I	Clock generator	
13	IC(Vpp)	-	Connect to Vss	
14,15	XT1,2	-	Sub clock generator	
16	Vdd	-	Power supply(+5V)	
17	$\overline{\text{HP_MUTE}}$	O	Mute of headphones	
18	PROTECTION	I	Protection detection	
19	SBUSY	I/O	Serial data busy	
20	SDATA	I/O	Serial data	
21	DSP_CLK	O	Clock for DSP	
22	DSP_DATA	O	Data for DSP	
23	DSP_ST	O	Strobe for DSP	
24	$\overline{\text{MUTE}}$	O	Mute control	L: Mute ON
25	Avss	-	GND of A/D converter	
26	PLL_DO	O	PLL DO	
27	PLL_CE	O	Chip enable for PLL	
28	PLL_DATA	O	Data detection for PLL	
29	PLL_CLK	O	Clock for PLL	
30	$\overline{\text{T_MUTE}}$	O	Mute for tuner	L: Mute ON
31	$\overline{\text{STEREO}}$	I	Stereo signal detection	L: Stereo
32	$\overline{\text{SD}}$	I	Synchro signal detection	L: SD detection
33	RDS_SLEVEL	I	Signal level of RDS	
34	Avdd	-	Analog power supply for A/D converter	
35	Avref	-	Reference voltage for A/D converter	
36	RDS_CLK	I	Clock for RDS	
37	RDS_DATA	I	Data for RDS	
38	N.C.	I	No used	
39	REMOCON_IN	I	Input port of remote control signal	
40	Vss	-	GND	

CIRCUIT DESCRIPTION

No.	Name	I/O	Description
41	+10dB_ATT	O	+10Db attenuator L: ATT ON
42	VOL_DATA	I/O	Electric volume control data
43	TAP	O	LO-HI tap change-over R-V300/V350
	VCR_REC	O	VCR REC change-over R-A100/A150
44,45	N.C.	I	No used
46	Vdd	-	Power supply(+5V)
47,48	N.C.	I	No used
49	CS_RELAY	O	Center and surround speaker relay control L: C,Sch OFF R-V300/V350
		I	NPUT LEVEL O Input level change-over H: 0dB R-A100/A150
50	F_RELAY	O	Front speaker relay control L: L,Rch OFF
51	TC9215	O	Vidual selector change-over R-V300/V350
	TAPE1_REC	O	TAPE! REC change-over R-A100/A150
52	VOICE_CTRL	O	Voice activation / Standby LED
53	SEL_STB1	O	Strobe signal for selector IC
54	SEL_DATA	O	Data signal for selector IC
55	SEL_CLK	O	Clock signal for selector IC
56	VOICE	I	Input port of voice activation
57	VOL_CLK	O	Clock signal for electric volume
58,59	N.C.	I	No used
60	REM_REWRREQ	O	Rewrite request signal of interlocution remocon data
61	REM_RWR	I	Rewrite in signal of interlocution remocon data
62	REM_REREN	I	Transmit signal of interlocution remocon data L: Transmission
63-70	INP 0-7	O	Remote control data bits 0-7
71	VSEL1	O	Vidual selector
72	POWER	O	Power relay control
73-78	SEG11-16	O	Display segment control 11-16 / Key scan 0-5
79	Vload	-	Connect to PLL down resistor
80	SEG10	O	Display segment control 10
81	SEG9	O	Display segment control 9 / Key scan 7 8Tuner destination)
82	SEG8	O	Display segment control 8 / Key scan 8 (Model discrimination)
83-89	SEG1-7	O	Display segment control 1-7
90-100	GRID1-11	O	Display grid control 1-11

2-4 DESTINATION LIST OF TUNER

Destination	Band	Frequency Range	Channel Space	IF	PLL Frequency	Diode SW (X14-)			
						DSW3	DSW2 (D31)	DSW1 (D30)	DSW0 (D29)
K1 (1700)	FM	87.5MHz~108.0HMz	100kHz	+10.7MHz	50kHz	0	0	0	0
	AM	530kHz~1700kHz	10kHz	+450kHz	10kHz				
K2 (1610)	FM	87.5MHz~108.0HMz	100kHz	+10.7MHz	25kHz	0	0	0	1
	AM	530kHz~1610kHz	10kHz	+460kHz	10kHz				
E1	FM	87.5MHz~108.0HMz	50kHz	+10.7MHz	25kHz	0	0	1	1
	AM	531kHz~1602kHz	9kHz	+450kHz	9kHz				
E3 (RDS)	FM	87.5MHz~108.0HMz	50kHz	+10.7MHz	25kHz	0	1	0	1
	AM	531kHz~1602kHz	9kHz	+450kHz	9kHz				
E4 (LW) (RDS)	FM	87.5MHz~108.0HMz	50kHz	+10.7MHz	25kHz	0	1	1	0
	MW	531kHz~1602kHz	9kHz	+450kHz	9kHz				
	LW	153kHz~279kHz	9kHz	+450kHz	9kHz				
M	K2 / E1 change only setting DSW1 (DSW1=0:K2/1:E1)					0	0	(Q5,D33)	1

Diode SW(DSWx) 0=No diode (Static mode,LOW)
1=Diode (Static mode,HIGH)
X=Transistor SW (0=OFF / 1=ON)

2-5 MODEL DISTINATION

MODEL	DIODE SW (X14)D34
R-V300/V350	0
R-A100/A150	1

CIRCUIT DESCRIPTION

3. Test mode

Setting:	While pressing the ◁INPUT key, plug the AC power cord into the AC wall outlet. All the fluorescent display indicates. (The all-illuminated state is cleared by pressing any main unit keys.
Cancelling:Plug the AC power cord out from the AC wall outlet.	

3-1 Contents of the test mode

No.	OPERATION KEYS	TUNER MODE	EXCEPT TUNER	REMARKS
1	INPUT	→87.50←→CD←→LD←→VCR← →TAPE1←→AUX←		
2	MULTI. CONTROL LEVEL∨∧	←01←→02←→39←→40← CHANGES THE PRESET CH. 01 THROUGH 40		
3	TIMER SET		PRO LOGIC←→3 STEREO TEST TONE ON/OFF (PRESS AUTO KEY)	R-V300/V350
			PRO LOGIC ON←→OFF	R-A100/A150
4	TIMER MODE		→AREN←→JAZZ CLUB→STADIUM→	R-V300/V350
			DSP ON←→OFF	R-A100/A150
5	CLOCK		STEREO ON←→OFF	R-A100/A150
6	A.MEMO	FL DISPLAY ON←→OFF	SRS ON←→OFF	R-A100/A150
7	AUTO	AUTO ON←→OFF	→TEST Lch←→TEST Cch→TEST Rch→TEST Sch→	R-V300/V350
			→S.DIRECT ON→S.DIRECT ON / MUTE ON→OFF→	R-A100/A150
8	MULTI.CONTROL MODE	↓ BASS 0dB ↓ TREBLE 0dB ↓ L/R, BALANCE ↓ INPUT 0dB ↓		
9	PTY	→INPUT SELECTOR→OFF.S-LEVEL→ON.S-LEVEL→		R-V350(E/T)
	TAPE2	TUNER MODE ONLY		R-A150(E/T)
10	DISPLAY	TIMER NO PS←→01 87.50		E,T type only
11	TA/NEWS/INFO.	→TA→NEWS→INFO→OFF→ Change the segment cyclically		

MODE	KEY: MULTI. CONTROL ∨LEVEL∧	KEY: TUNING DOWN / UP	KEY: BAND
⌘ EXCEPT R-A100/A150			
↓			
VOLUME		-89dB←→0dB	-40dB
↓			
SP⌘		MIN.←→MAX	0dB
↓			
DELAY⌘		15←→30	20
↓			
EFFECT⌘		1←→5	3
↓			
L/R,BALANCE	DOWN←→UP	LMIN←→RMAX	CENTER
↓			
TONE		MIN←→MAX	FLAT
↓			
INPUT	-6dB←→0dB	-6dB←→0dB	0dB
↓			

3-2 Error message

DISPLAY	DESCRIPTION
ERR1	Main u-COM sub clock no output
ERR2	Main u-COM sub clock frequency NG

ADJUSTMENT

No.	ITEM	INPUT SETTING	OUTPUT SELECTOR	TUNER/AMP SETTING	ALIGNMENT POINTS	ALIGN FOR	FIG.
FM SECTION			**SELECTOR : FM**				
1	DISCRIMINATOR L31↔L32 (E, T only)	(A) 98.0MHz 1kHz, ±40kHz dev (E, T type) 60dBu (ANT INPUT)	Connect a DC voltmeter between port of CN2	AUTO 98.0MHz	L31 (X05-)	0V	(a)
			(B)		L32 (X05-)	Minimum distrotion	
2	DISTORTION (STEREO)	(C) 98.0MHz 1kHz, ±40kHz dev pilot: ±6kHz dev 60dBu (ANT INPUT)	(B)	AUTO (98.0MHz)	IFT (W02-)	Mininum distrotion	(a)
AUDIO SECTION R-A100/A150 ONLY							
1	B CLASS IDLE CURRENT	–	Connect a DC voltmeter	Volume: Minimum Selector: any modes other than TUNER	CN31 : Lch CN32 : Rch	13mV	(b)

(a)

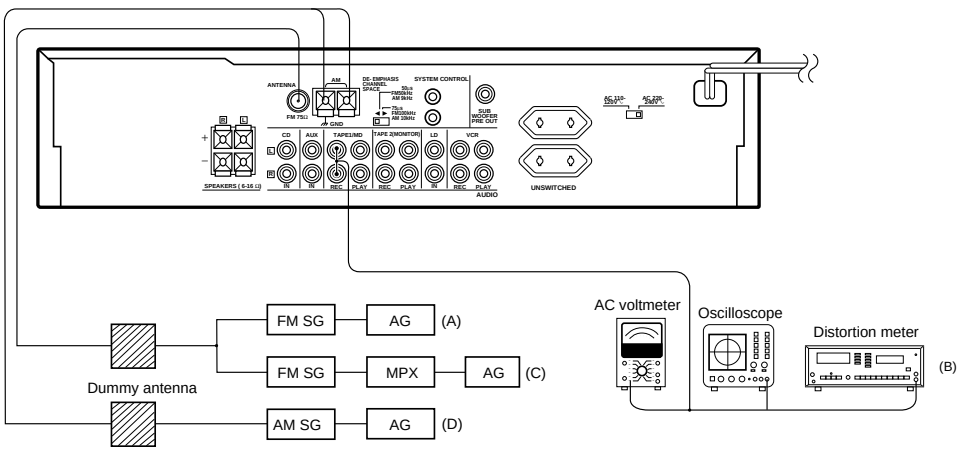

(b)

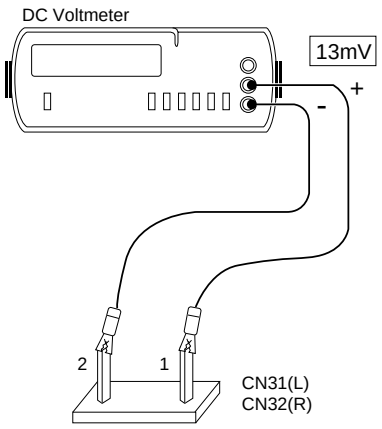

PARTS DESCRIPTIONS

CAPACITORS

CC 45 TH 1H 220 J
1 2 3 4 5 6

1 = Type ... ceramic, electrolytic, etc.
2 = Shape ... round, square, ect.
3 = Temp. coefficient
4 = Voltage rating
5 = Value
6 = Tolerance



• Capacitor value

010 = 1pF
100 = 10pF
101 = 100pF
102 = 1000pF = 0.001μF
103 = 0.01μF



• Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	±30	±60	±120	±250	±500

Example : CC45TH = -470 ± 60ppm/°C

• Tolerance (More than 10pF)

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10μF -10 ~ +50 Less than 4.7μF -10 ~ +75

(Less than 10pF)

Code	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

• Voltage rating

1st word \ 2nd word	A	B	C	D	E	F	G	H	J	K	V
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	-
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	-

• Chip capacitors

(EX) C C 7 3 F S L 1 H 0 0 0 J
1 2 3 4 5 6 7
(Chip) (CH, RH, UJ, SL)

(EX) C K 7 3 F F 1 H 0 0 0 Z
1 2 3 4 5 6 7
(Chip) (B, F)

Refer to the table above.
1 = Type
2 = Shape
3 = Dimension
4 = Temp. coefficient
5 = Voltage rating
6 = Value
7 = Tolerance

Dimension (Chip capacitors)

Dimension code	L	W	T
Empty	5.6 ± 0.5	5.0 ± 0.5	Less than 2.0
A	4.5 ± 0.5	3.2 ± 0.4	Less than 2.0
B	4.5 ± 0.5	2.0 ± 0.3	Less than 2.0
C	4.5 ± 0.5	1.25 ± 0.2	Less than 1.25
D	3.2 ± 0.4	2.5 ± 0.3	Less than 1.5
E	3.2 ± 0.2	1.6 ± 0.2	Less than 1.25
F	2.0 ± 0.3	1.25 ± 0.2	Less than 1.25
G	1.6 ± 0.2	0.8 ± 0.2	Less than 1.0

RESISTORS

• Chip resistor (Carbon)

(EX) R K 7 3 E B 2 B 0 0 0 J
1 2 3 4 5 6 7
(Chip) (B,F)

Dimension



• Carbon resistor (Normal type)

(EX) R D 1 4 B B 2 C 0 0 0 J
1 2 3 4 5 6 7

1 = Type
2 = Shape
3 = Dimension
4 = Temp. coefficient
5 = Rating wattage
6 = Value
7 = Tolerance

Dimension (Chip resistor)

Dimension code	L	W	T
E	3.2 ± 0.2	1.6 ± 0.2	1.0
F	2.0 ± 0.3	1.25 ± 0.2	1.0
G	1.6±0.2	0.8±0.2	0.5±0.1

Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
1J	1/16W	2C	1/6W	3A	1W
2A	1/10W	2E	1/4W	3D	2W
2B	1/8W	2H	1/2W		

PC BOARD(Component side view)

(X05-4670-20) J70-0959-11

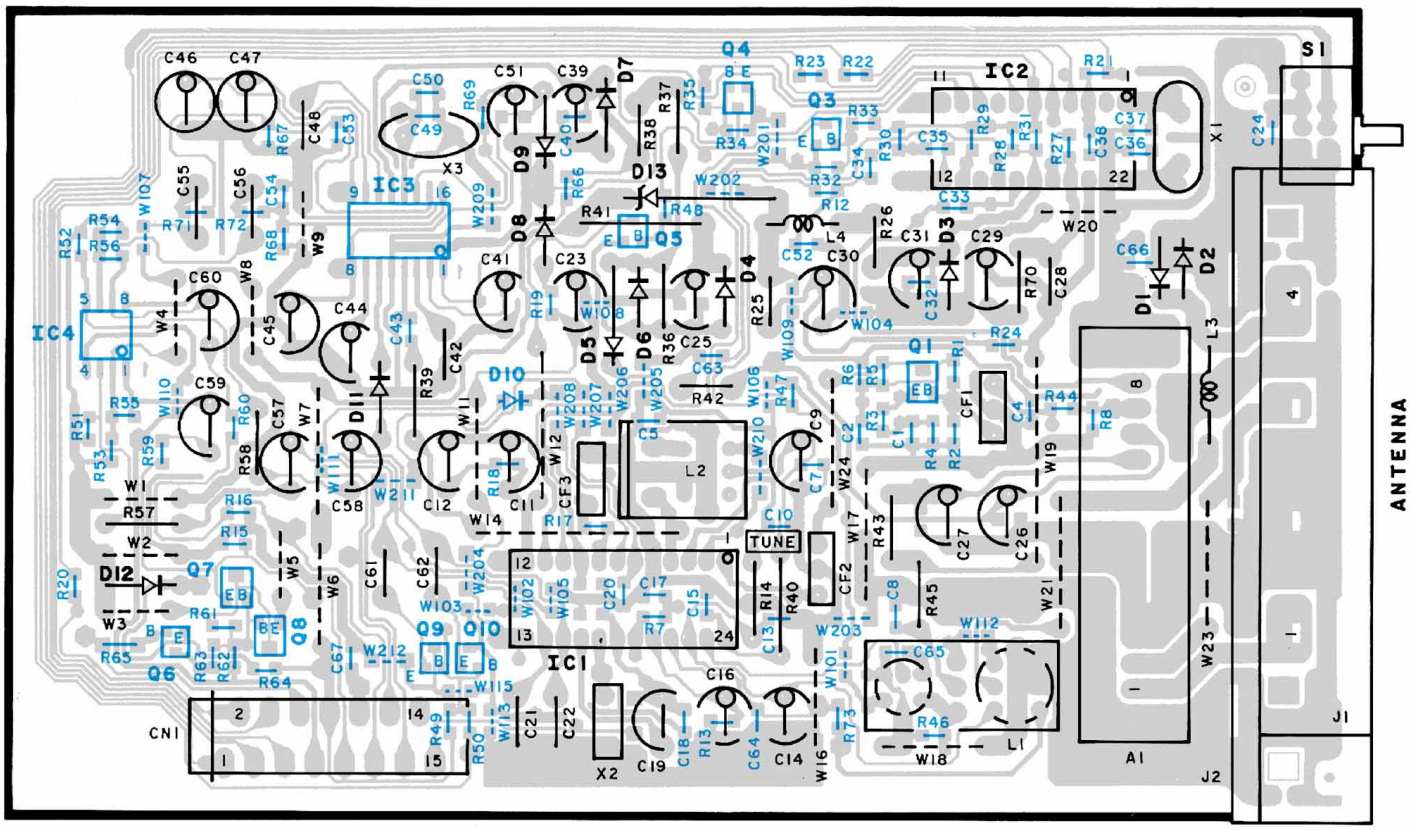

(X05-468X-XX) J70-0960-21

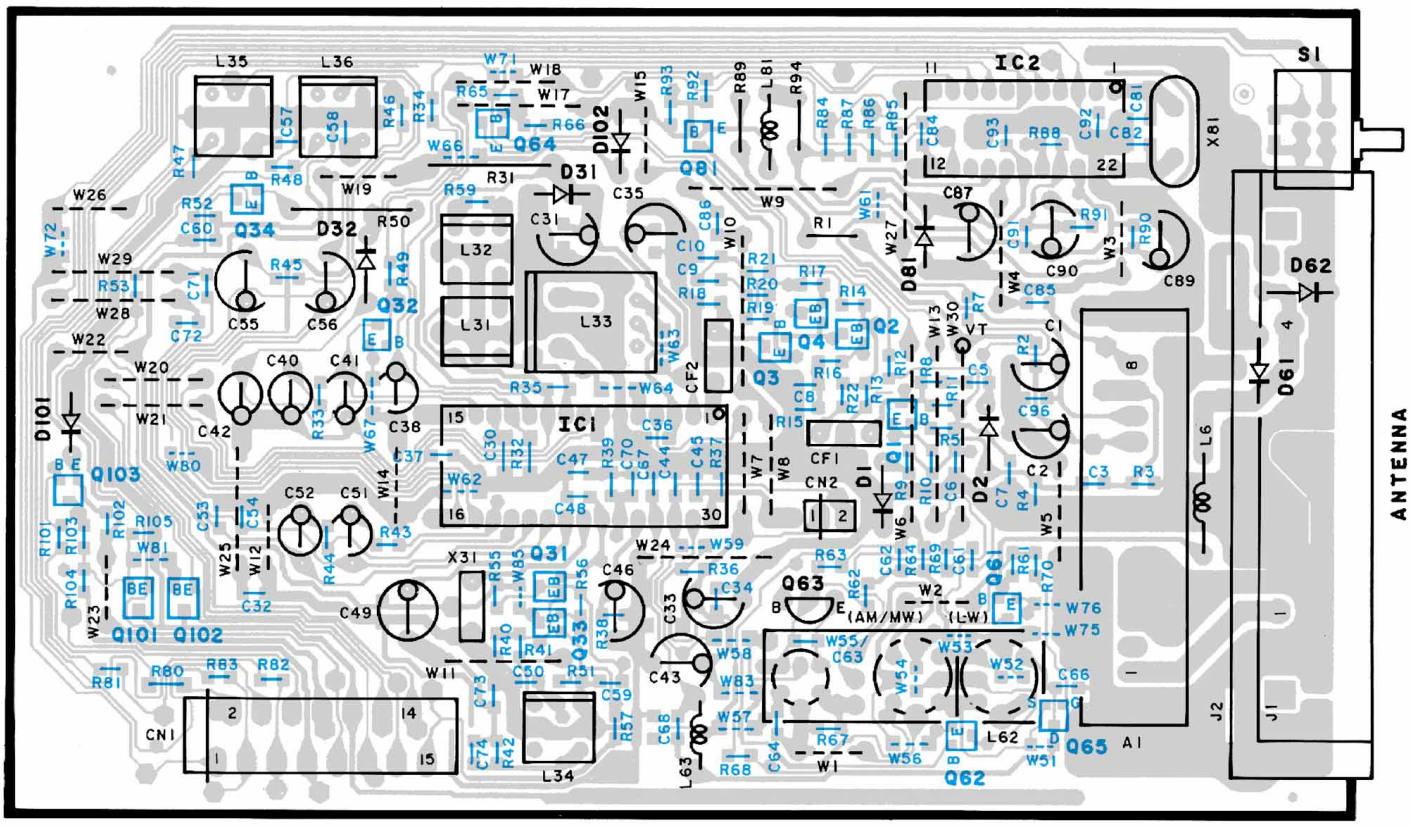

Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

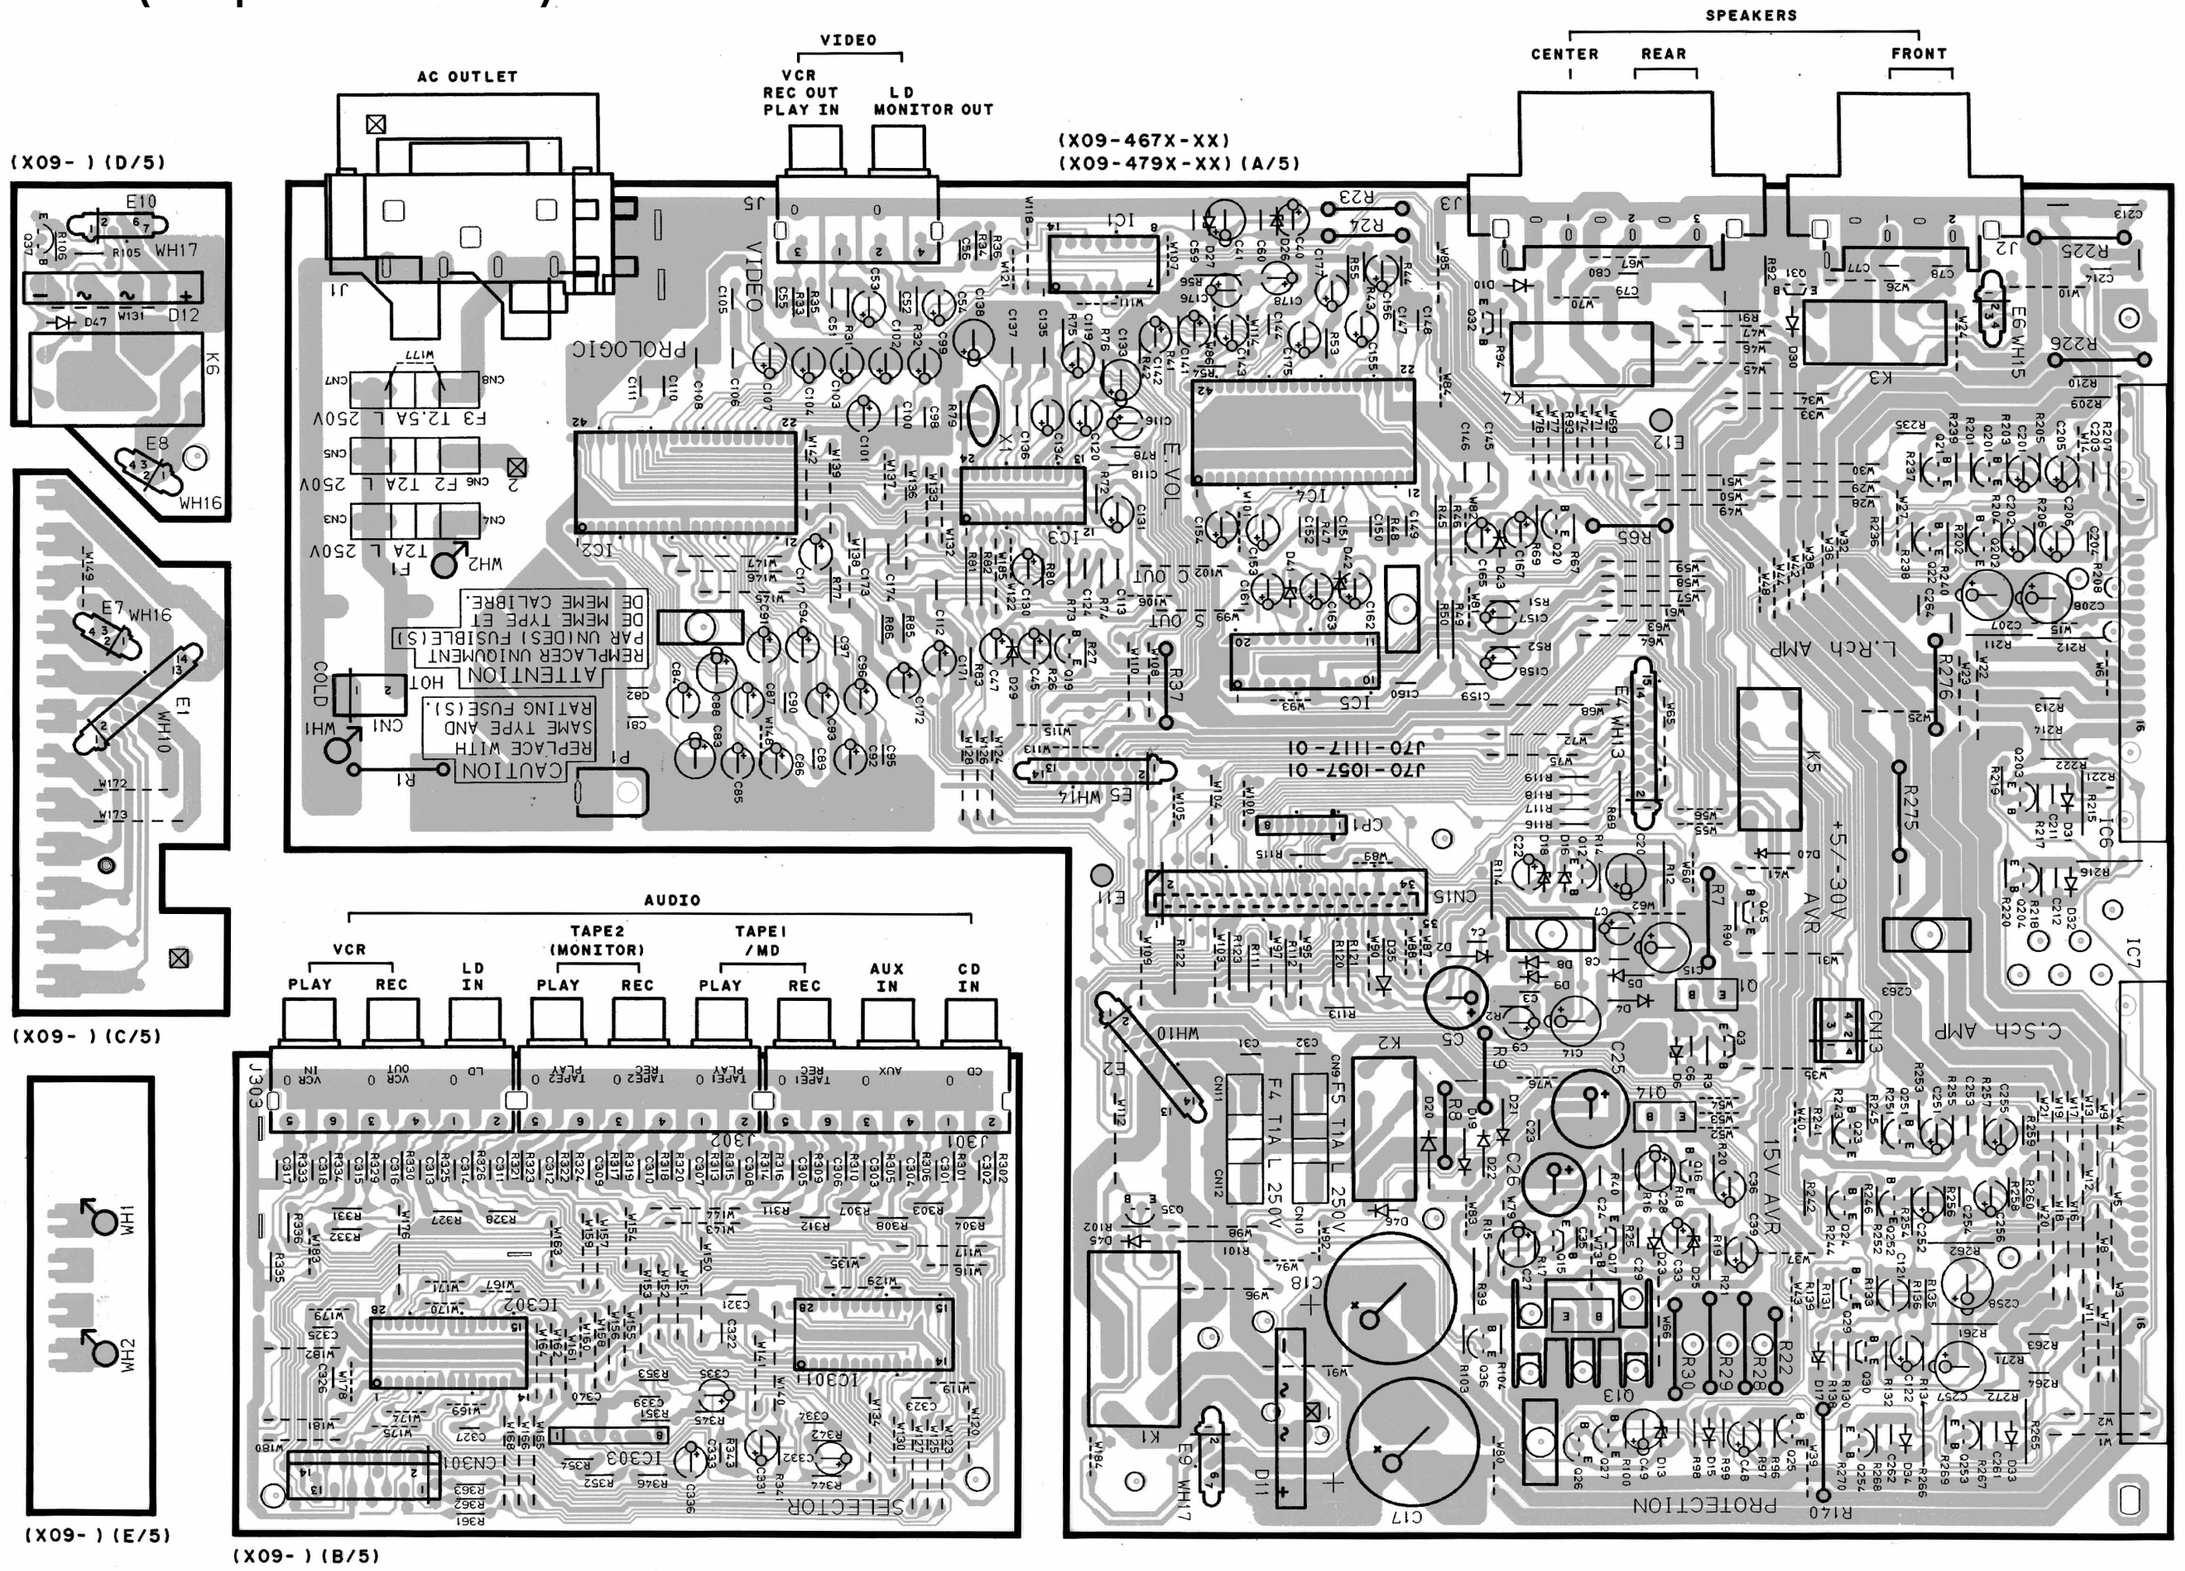

Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

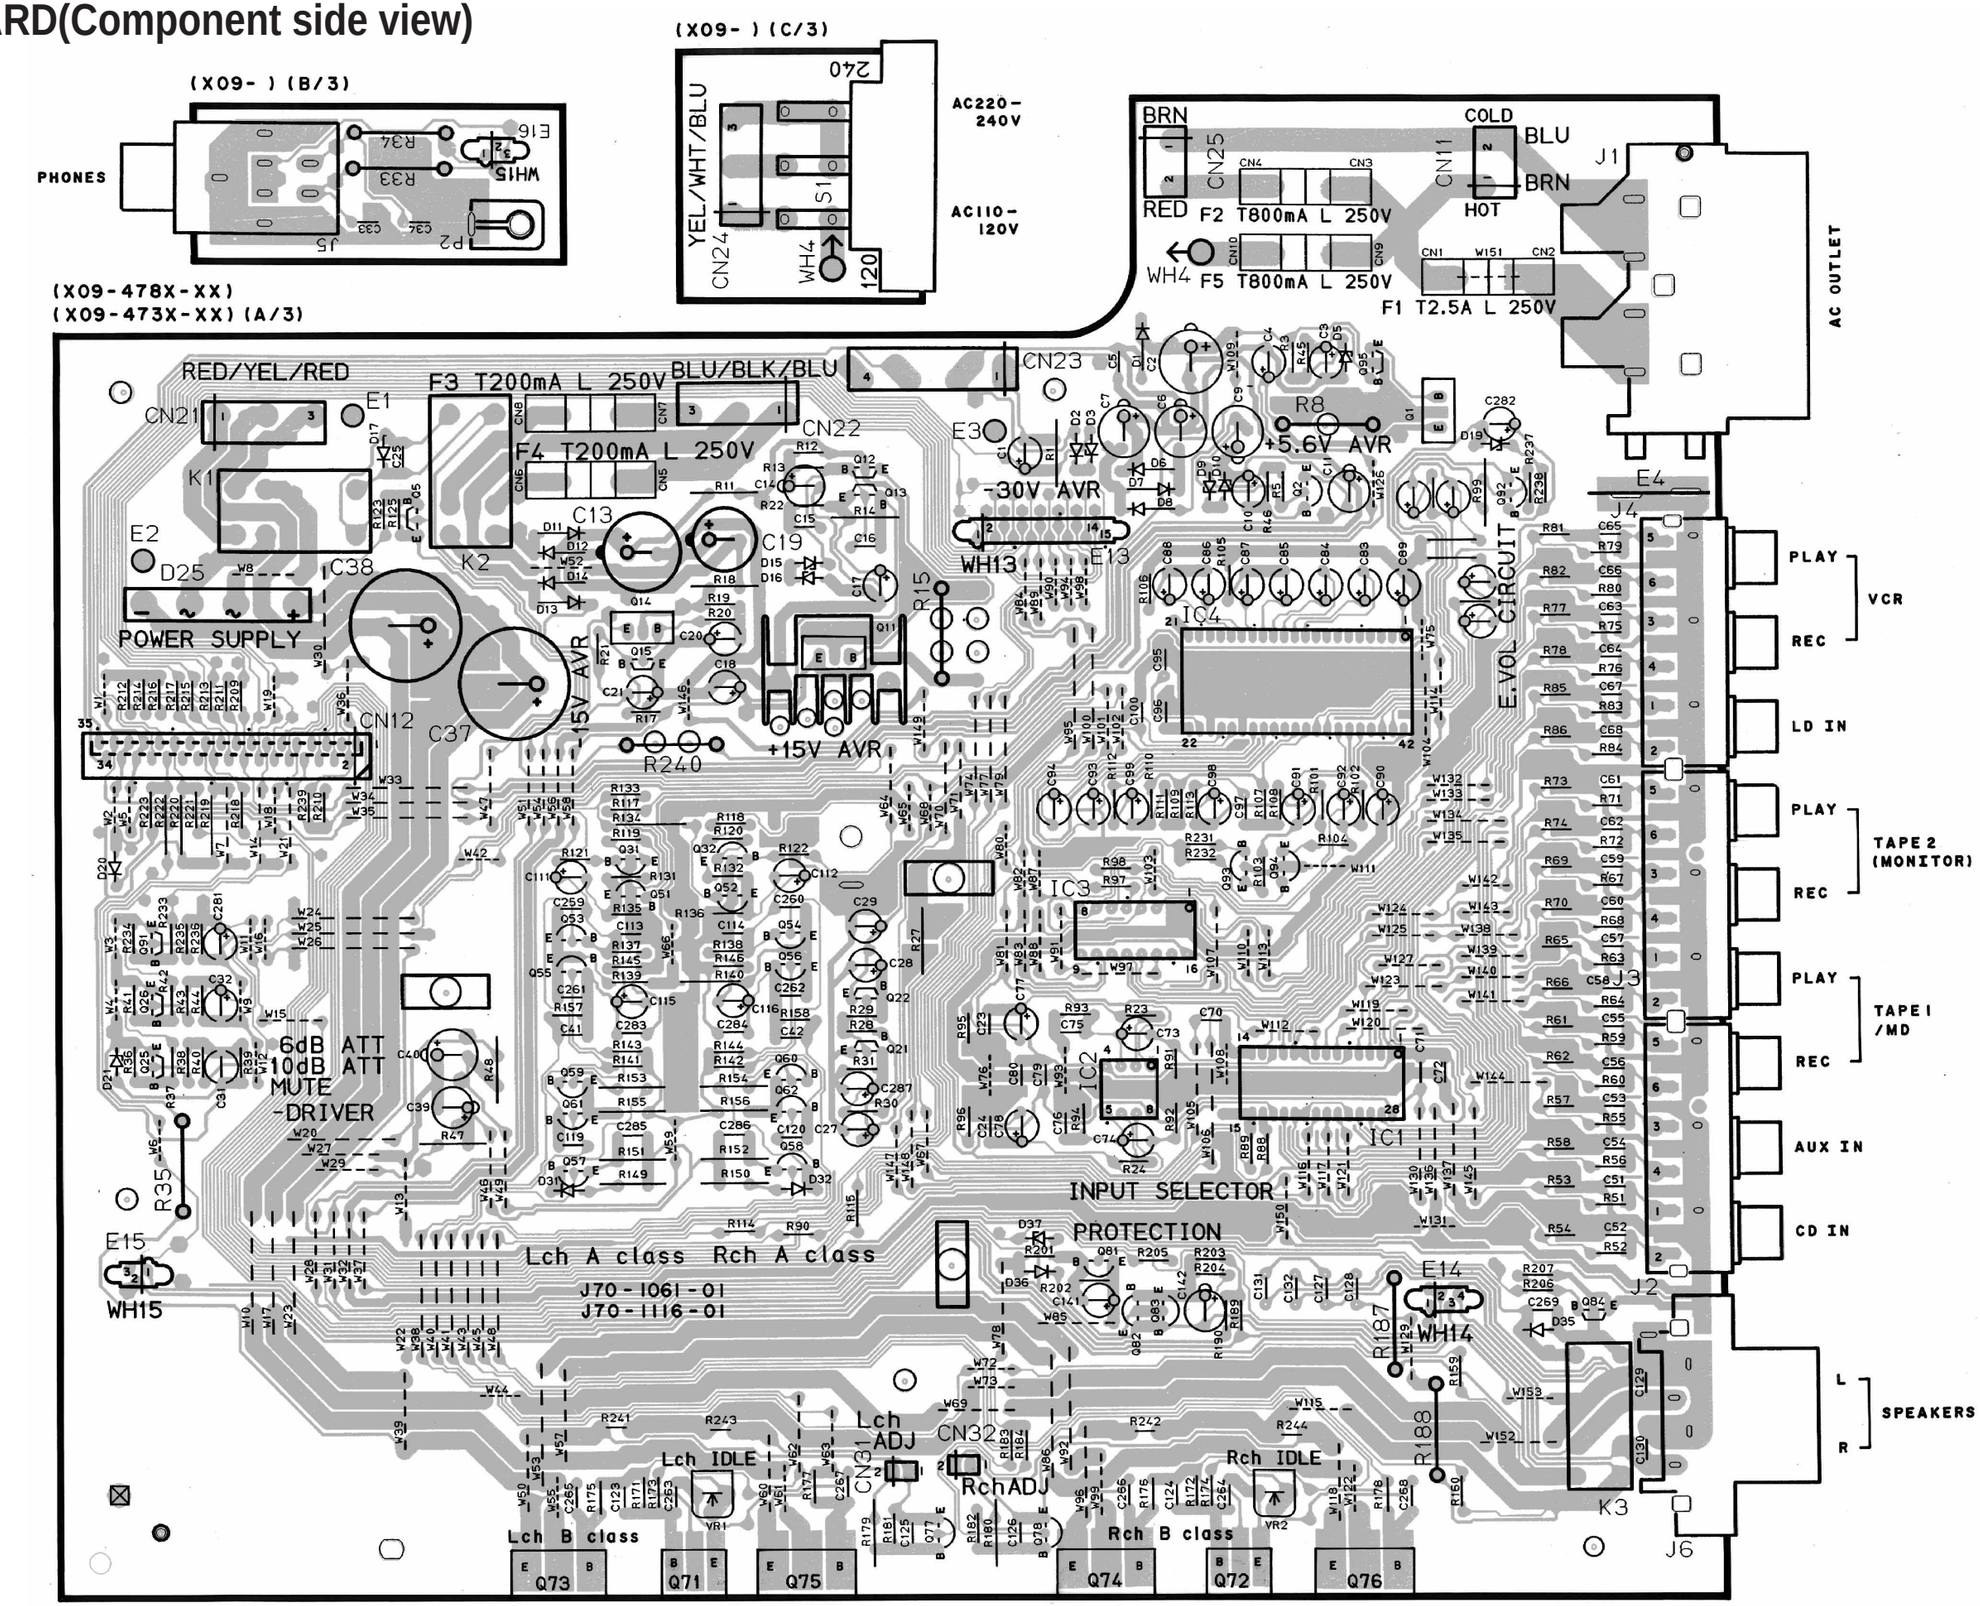

Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

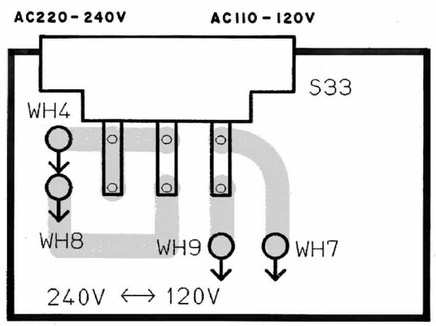

(X14-) (B/II)

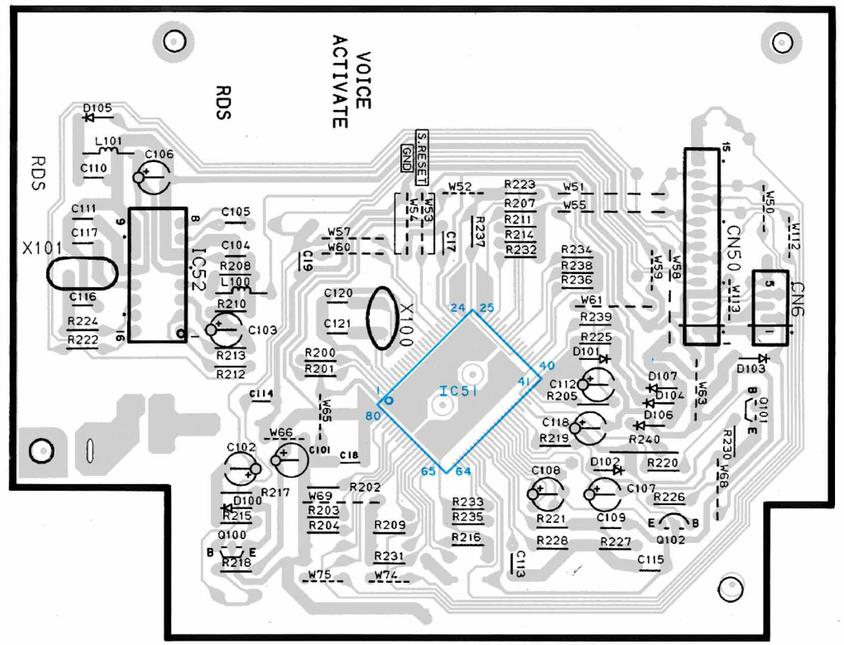

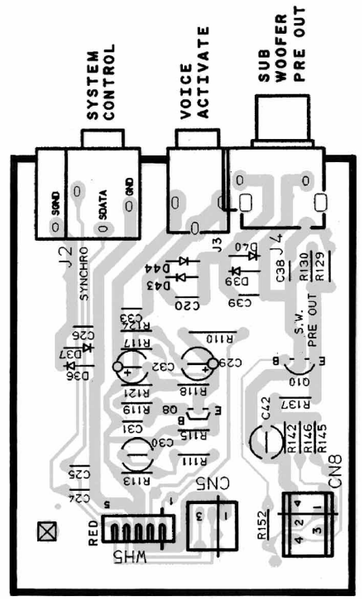

(X14-) (E/II)

(X14-) (G/II)

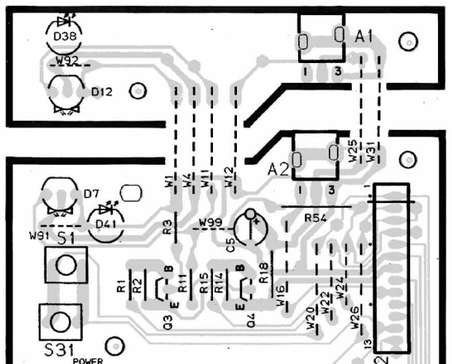

(X14-448X-XX)
(X14-464X-XX) (A/II)

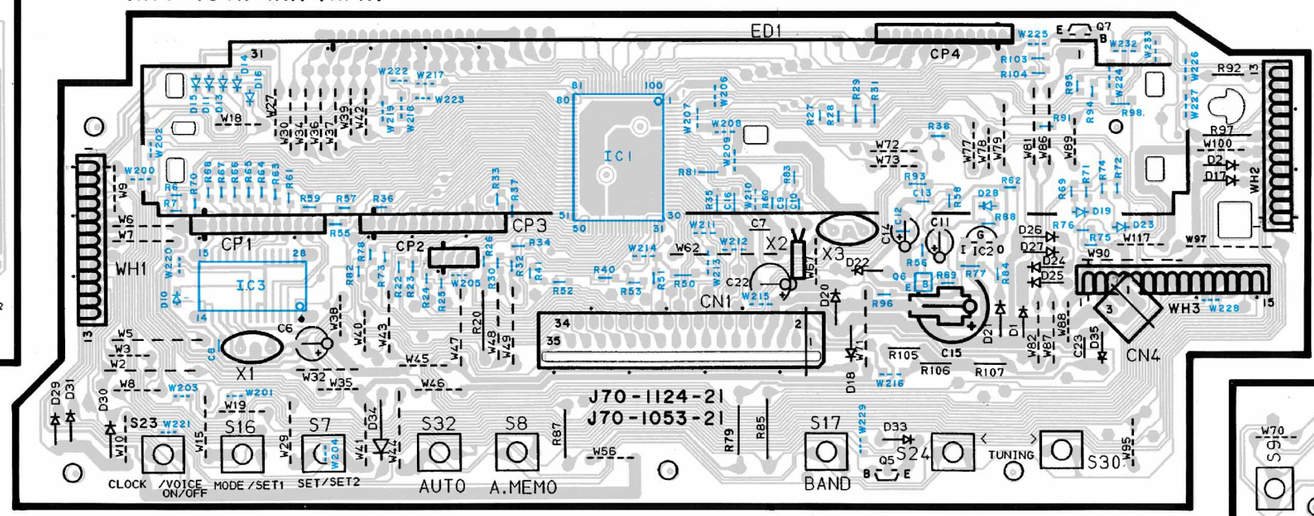

(X14-) (H/II)

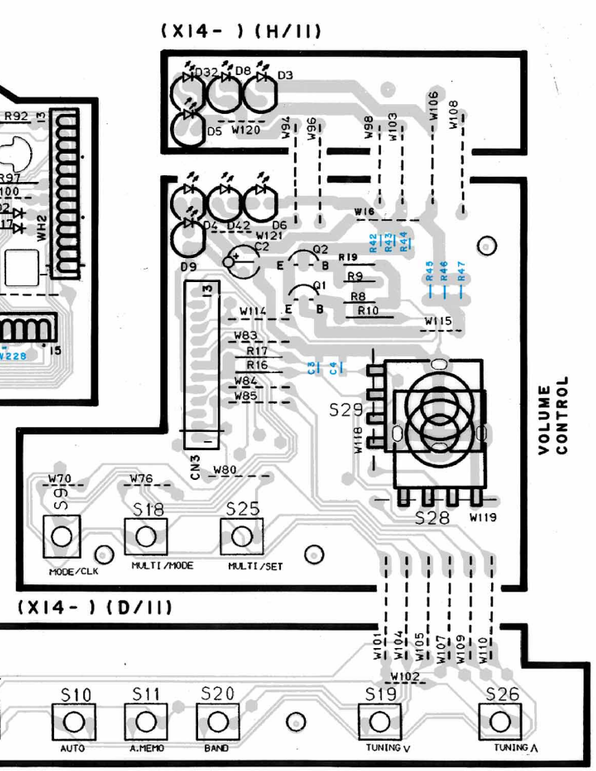

(X14-) (F/II)

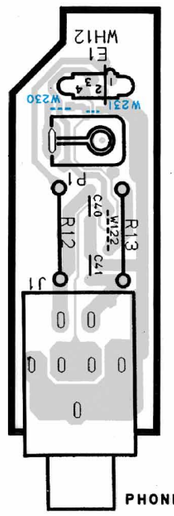

(X14-)
(C/II)

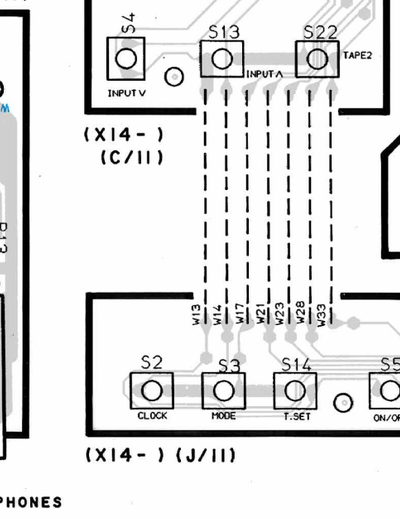

(X14-) (J/II)

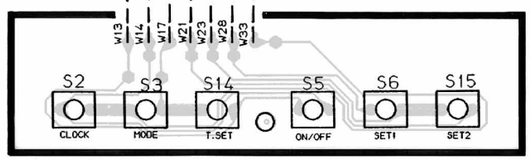

(X14-) (D/II)

(X14-) (I/II)

Refer to the schematic diagram for the value of resistors and capacitors.

(X05-4670-XX) : R-A100(M)/R-V300 (M,C,I,Y,X)

A1 (W02-2582-05) FM FRONT END

FET : 2SK302
TR1 : 2SC2714
TR2,3 : 2SC2413
D1-3 : HVU202 or 1T362

VT VOLTAGE

BAND	FREQ.	VT
FM	LF	1.6V
	HF	7.6V
AM	LF	1.4V
	HF	5.2V

LF: LOWEST FREQUENCY
HF: HIGHEST FREQUENCY

C-V100

DESTINATION		UNIT No.	(A)	J2
COUNTRY	ABB.			
PX	Y	X05-4670-20	YES	F10-1098
GENERAL MARKET	M	X05-4670-21	YES	F10-1101
MALAYSIA	I			
CHINA	C			
AUSTRALIA	X	X05-4670-72	NO	

C-V300

DESTINATION		UNIT No.	(A)	J2
COUNTRY	ABB.			
GENERAL MARKET	M	X05-4670-21	YES	F10-1101
MALAYSIA	I			
CHINA	C			
AUSTRALIA	X	X05-4670-72	NO	

IC1 : LA1832
IC2 : LC72131
IC4 : NJM4565M

Q1 : 2SC2714(R,O)
Q3,6 : 2SA1576A(R,S) or 2SA1586(Y,GR) or 2SB1218A(Q,R)
Q5,9,10 : 2SC4081(R,S) or 2SC4116(Y,GR) or 2SD1819A(Q,R)
Q7,8 : 2SD1757K or 2SD2114K

D1,2,8 : 1SS133 or HSS104
D3,4 : RD5.1ES(B2) or HZS5.1N(B2) or MTZJ5.1(B) or UZ-5.1BSB
D10 : MA111
D12 : RD3.3ES(B2) or HZS3.3N(B2) or MTZJ3.3(B) or UZ-3.3BSB
D13 : RD2.7ES(B2) or HZS2.7N(B2) or MTZJ2.7(B) or UZ-2.7BSB

SIGNAL LINE
GND LINE
+B LINE
-B LINE

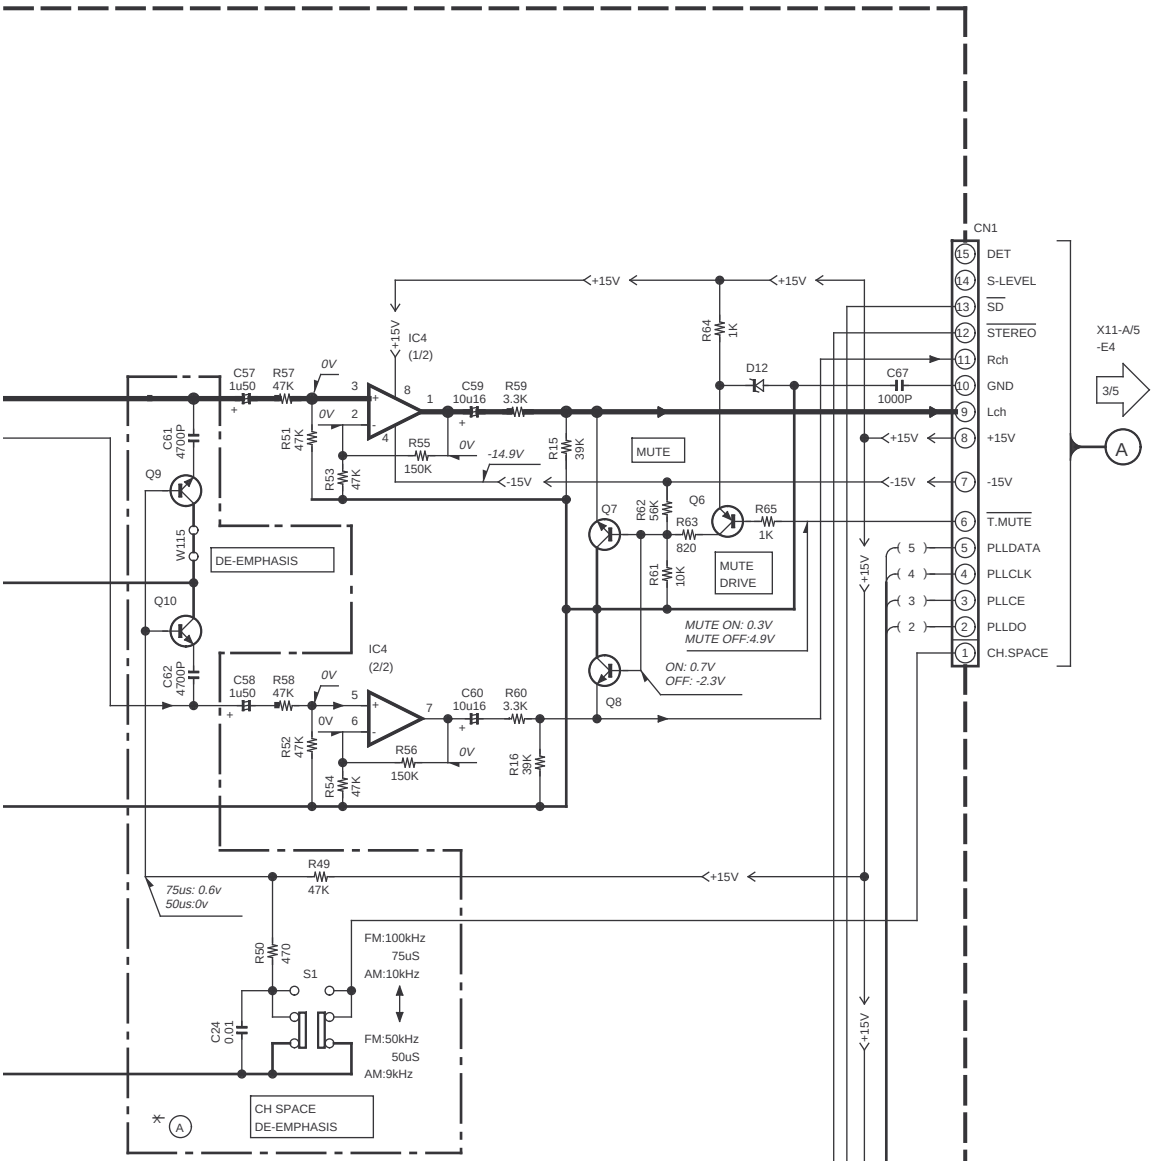

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM made.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

CAUTION: *For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.*

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

R-A100/A150/V300/V350(M) (1/5)

C-V150/V350 (X05-468X-XX)

DESTINATION		UNIT No.	Ⓐ - Ⓒ	R3	R16, 20	R61-66, 68,70	C53, 54	C62, 63	C73	Q61-65	CF1,2	L62	W11	W6,13, 56,76	W51,52, 54,55
COUNTRY	ABB.														
EUROPE	E	2-71	YES	1.8K	10	NO	0.022	NO	NO	NO	L72-0536 (MS3)	L39-1351	NO	NO	YES
U.K.	T	0-51				YES		YES		YES		L39-1352		YES	NO

C-V100 (X05-4680-10)

DESTINATION		UNIT No.	Ⓐ - Ⓒ	R3	R16, 20	R61-66, 68,70	C53, 54	C62, 63	C73	Q61-65	CF1,2	L62	W11	W6,13, 56,76	W51,52, 54,55
COUNTRY	ABB.														
U.S.A. CANADA	K P	0-10	NO	560	15	NO	0.033	NO	YES	NO	L72-0596 (MS2)	L39-1351	YES	NO	YES

R-A150 (E,T)
(X05-468X-XX) R-V350 (K,P,E,T)

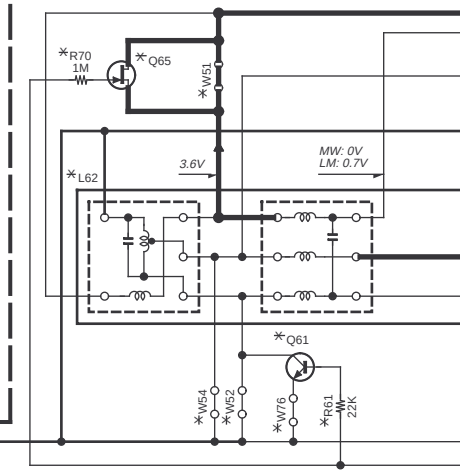

SIGNAL LINE
GND LINE
+B LINE
-B LINE

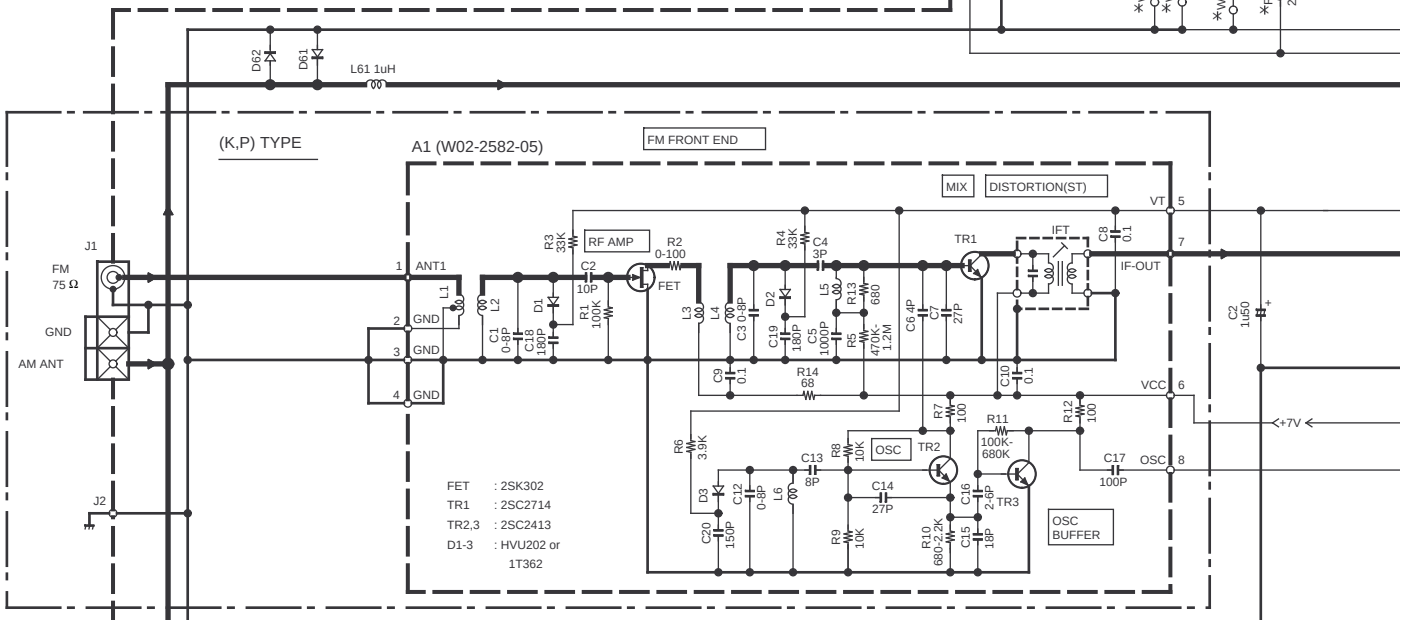

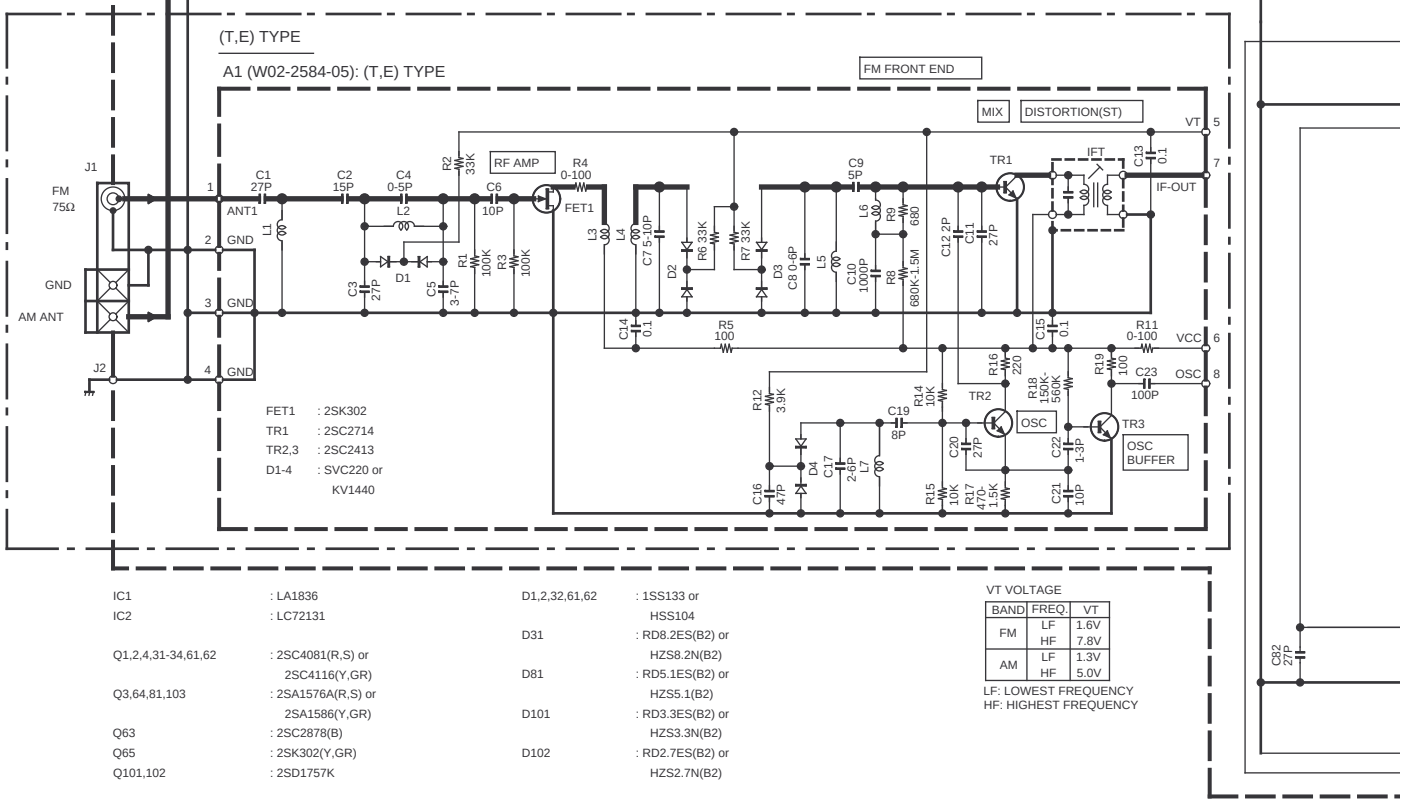

IC1	: LA1836
IC2	: LC72131
Q1,2,4,31-34,61,62	: 2SC4081(R,S) or 2SC4116(Y,GR)
Q3,64,81,103	: 2SA1576A(R,S) or 2SA1586(Y,GR)
Q63	: 2SC2878(B)
Q65	: 2SK302(Y,GR)
Q101,102	: 2SD1757K
D1,2,32,61,62	: 1SS133 or HSS104
D31	: RD8.2ES(B2) or HZS8.2N(B2)
D81	: RD5.1ES(B2) or HZS5.1(B2)
D101	: RD3.3ES(B2) or HZS3.3N(B2)
D102	: RD2.7ES(B2) or HZS2.7N(B2)

VT VOLTAGE

BAND	FREQ.	VT
FM	LF	1.6V
	HF	7.8V
AM	LF	1.3V
	HF	5.0V

LF: LOWEST FREQUENCY
HF: HIGHEST FREQUENCY

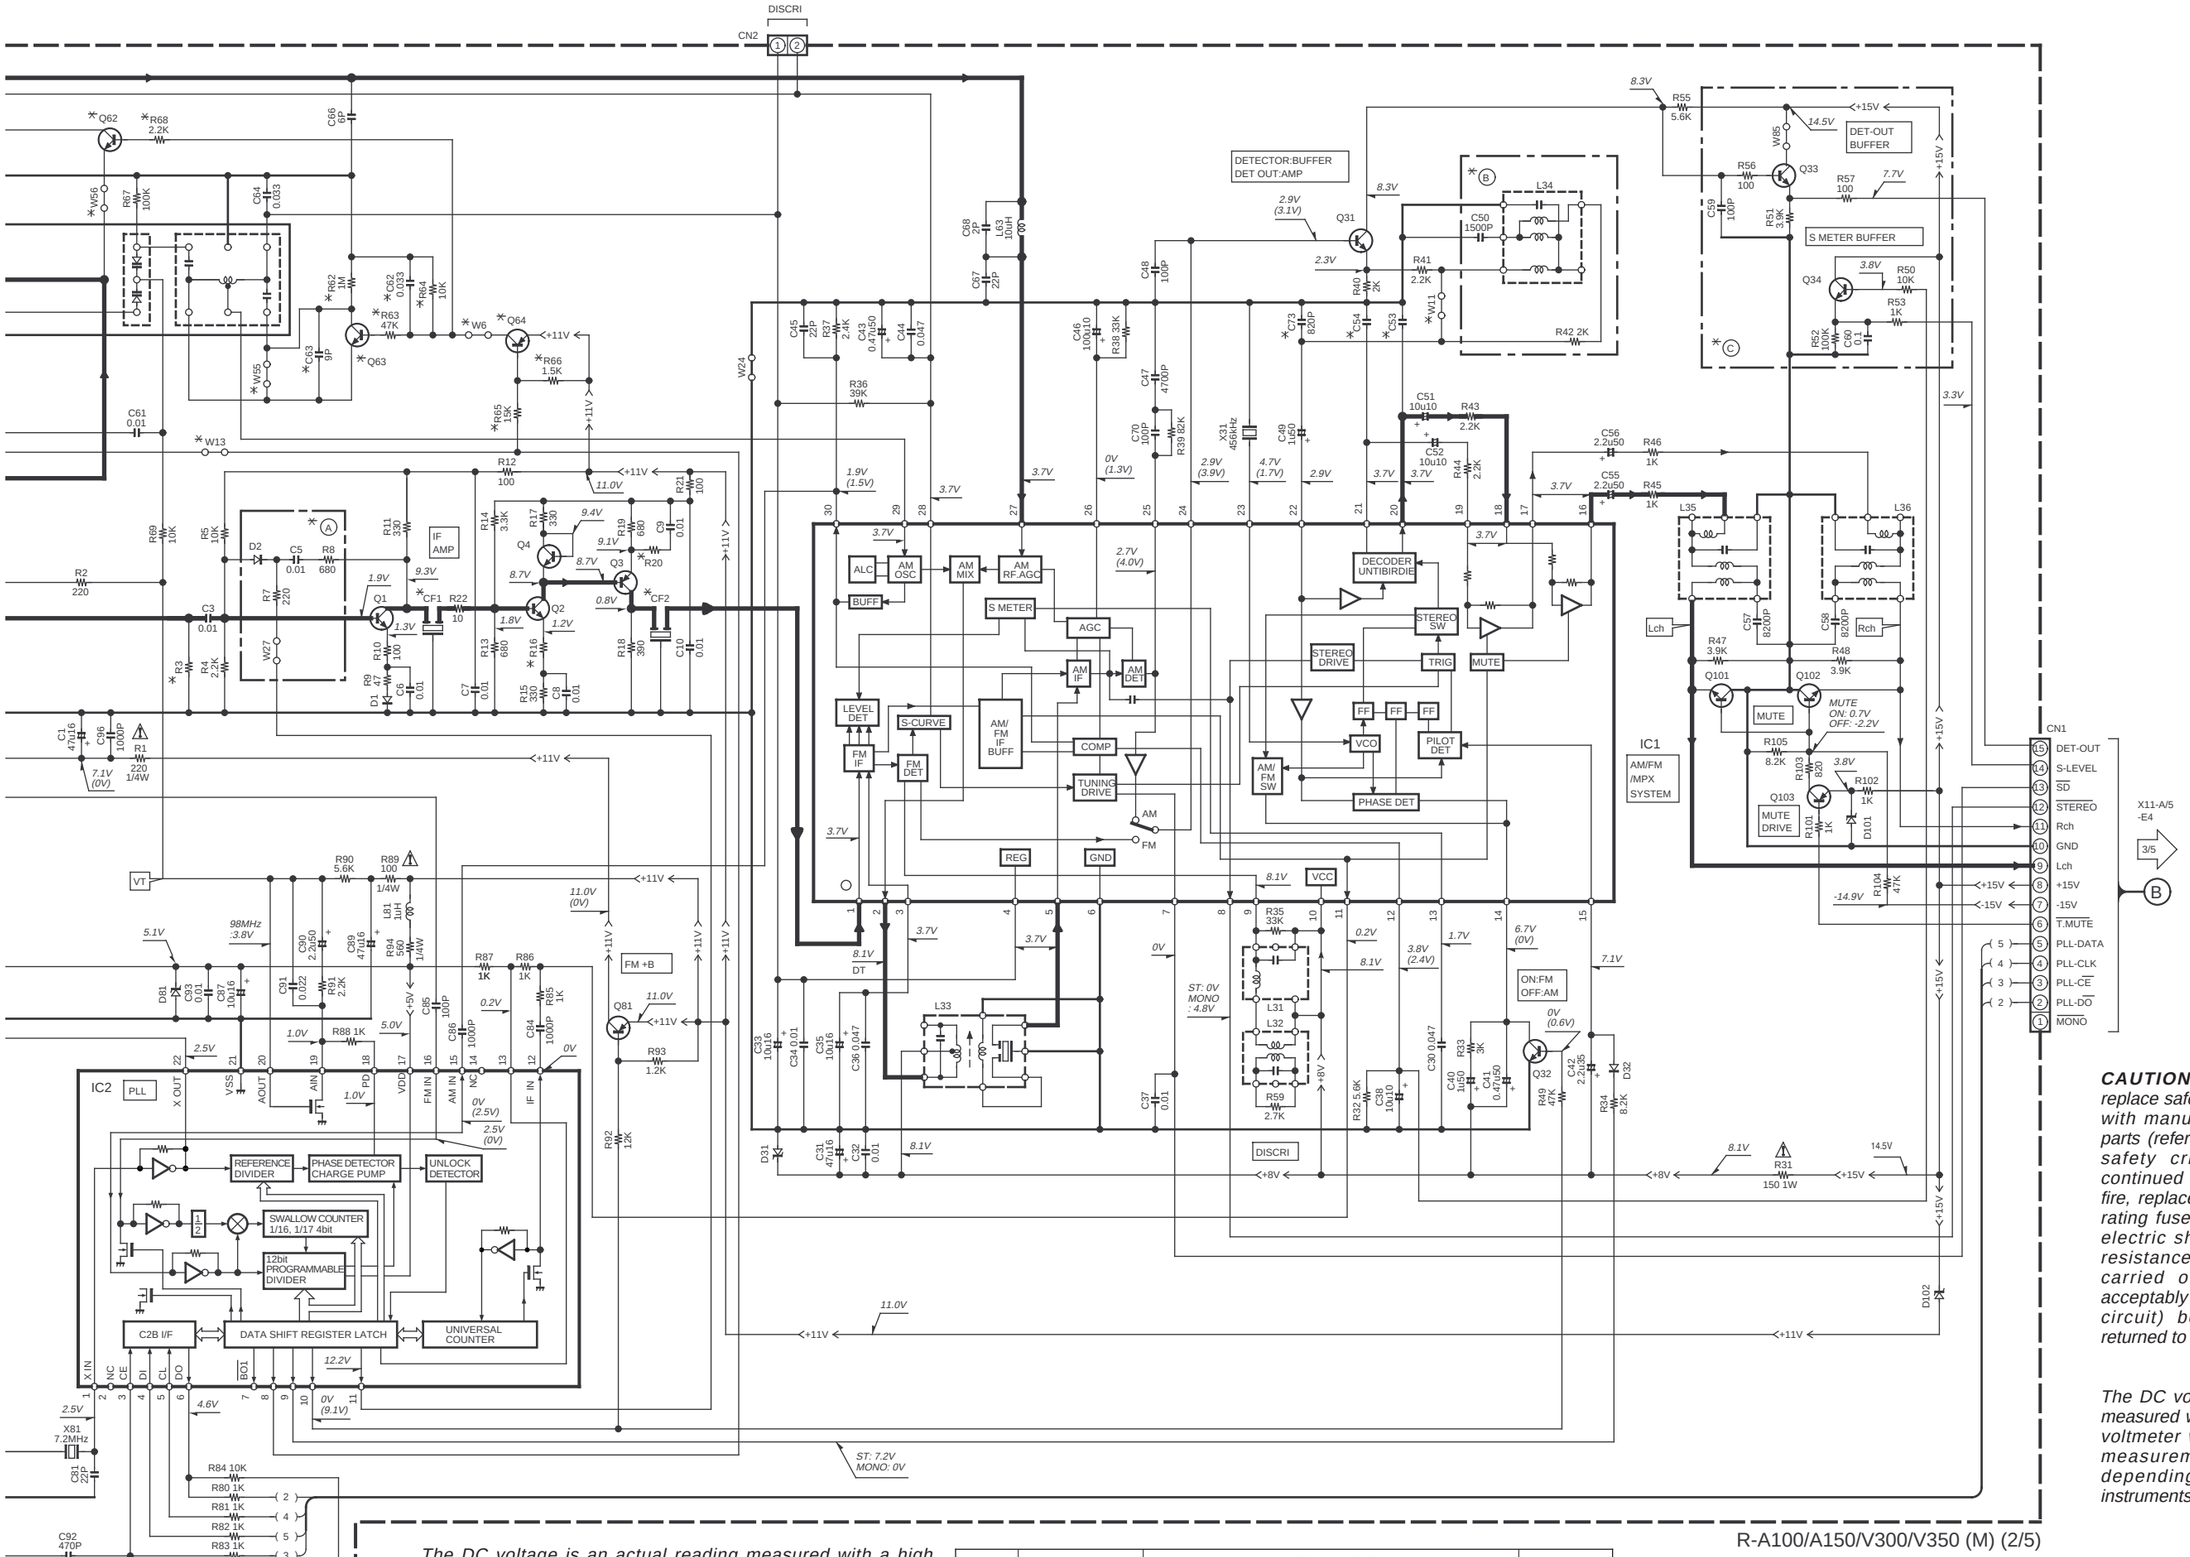

CAUTION: *For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.*

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM made.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

R-A100/A150/V300/V350 (M) (2/5)

Y05-3540-20

R-A100/A150/V300/V350

KENWOOD

AE | AF | AG | AH | AI | AJ | AK | AL | AM | AN

AUDIO UNIT
(X09-4780-20) (A/3) : R-A100
(X09-473X-XX) (A/3) : R-A150

CAUTION: *For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.*

IC4 ELECTRIC VOL.
IC1 INPUT SELECTOR
IC2 (1/2)
IC2 (2/2)
IC3 MODE SELECTOR
-10dB ATT CONTROLLER
-6dB ATT CONTROLLER
MUTE CONTROLLER
+9V AVR
+15V AVR
-15V AVR
+5.6V AVR
-30V AVR
+15V CONTROLLER (A CLASS)
CURRENT MIRROR
CURRENT ADJ.VR. (Lch)
CURRENT ADJ.VR. (Rch)
A CLASS 1ST
A CLASS 2ND
OVER CURRENT/OVER VOLTAGE CONTROLLER
OVER VOLTAGE DETECTOR
RELAY CONTROLLER
BUFFER
CD
TAPE1 REC
AUX
TAPE1 PLAY
TAPE2 REC
TAPE2 PLAY
LD
VCR REC
VCR PLAY

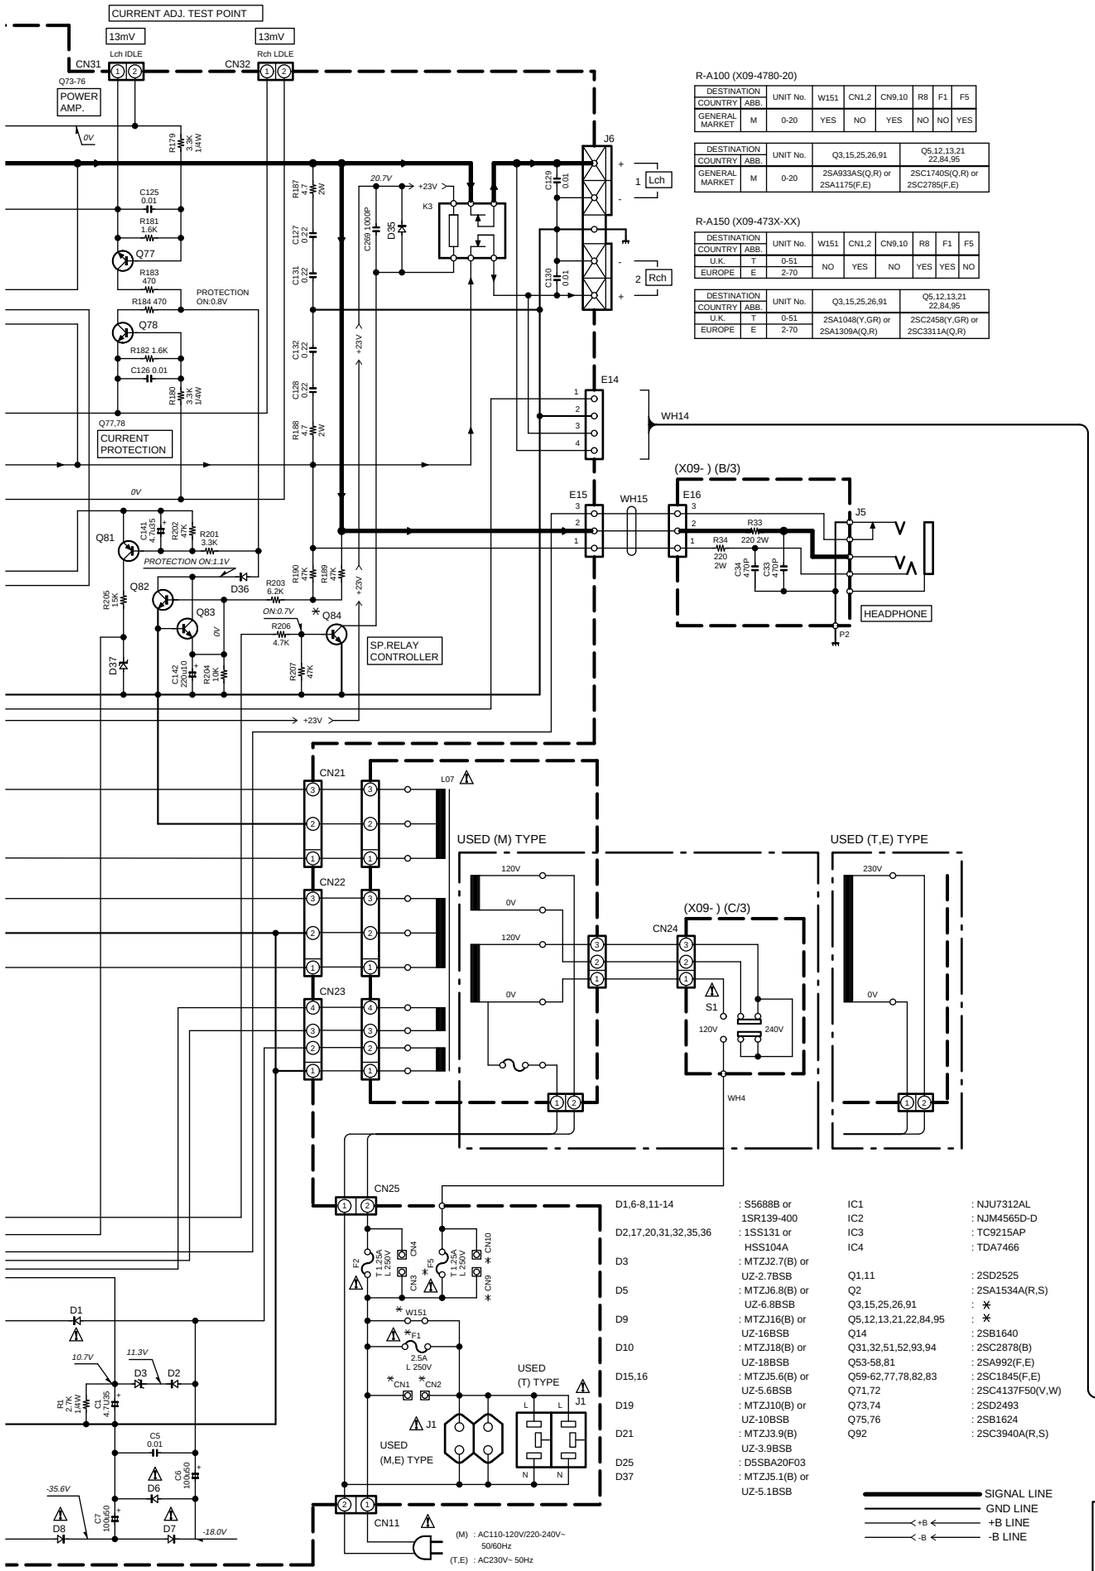

R-A100 (X09-4780-20)

DESTINATION		UNIT No.	W151	CN1,2	CN9,10	R8	F1	F5
COUNTRY	ABB.							
GENERAL MARKET	M	0-20	YES	NO	YES	NO	NO	YES

DESTINATION		UNIT No.	Q3,15,25,26,91	Q5,12,13,21 22,84,95
COUNTRY	ABB.			
GENERAL MARKET	M	0-20	2SA933AS(Q,R) or 2SA1175(F,E)	2SC1740S(Q,R) or 2SC2785(F,E)

R-A150 (X09-473X-XX)

DESTINATION		UNIT No.	W151	CN1,2	CN9,10	R8	F1	F5
COUNTRY	ABB.							
U.K.	T	0-51	NO	YES	NO	YES	YES	NO
EUROPE	E	2-70						

DESTINATION		UNIT No.	Q3,15,25,26,91	Q5,12,13,21 22,84,95
COUNTRY	ABB.			
U.K.	T	0-51	2SA1048(Y,GR) or 2SA1309A(Q,R)	2SC2458(Y,GR) or 2SC3311A(Q,R)
EUROPE	E	2-70		

D1,6-8,11-14	: S5688B or 1SR139-400	IC1	: NJU7312AL
D2,17,20,31,32,35,36	: 1SS131 or HSS104A	IC2	: NJM4565D-D
D3	: MTZJ2.7(B) or UZ-2.7BSB	IC3	: TC9215AP
D5	: MTZJ6.8(B) or UZ-6.8BSB	IC4	: TDA7466
D9	: MTZJ16(B) or UZ-16BSB	Q1,11	: 2SD2525
D10	: MTZJ18(B) or UZ-18BSB	Q2	: 2SA1534A(R,S)
D15,16	: MTZJ5.6(B) or UZ-5.6BSB	Q3,15,25,26,91	: ✱
D19	: MTZJ10(B) or UZ-10BSB	Q5,12,13,21,22,84,95	: ✱
D21	: MTZJ3.9(B) UZ-3.9BSB	Q14	: 2SB1640
D25	: D5SBA20F03	Q31,32,51,52,93,94	: 2SC2878(B)
D37	: MTZJ5.1(B) or UZ-5.1BSB	Q53-58,81	: 2SA992(F,E)
		Q59-62,77,78,82,83	: 2SC1845(F,E)
		Q71,72	: 2SC4137F50(V,W)
		Q73,74	: 2SD2493
		Q75,76	: 2SB1624
		Q92	: 2SC3940A(R,S)

SIGNAL LINE
GND LINE
+B LINE
-B LINE

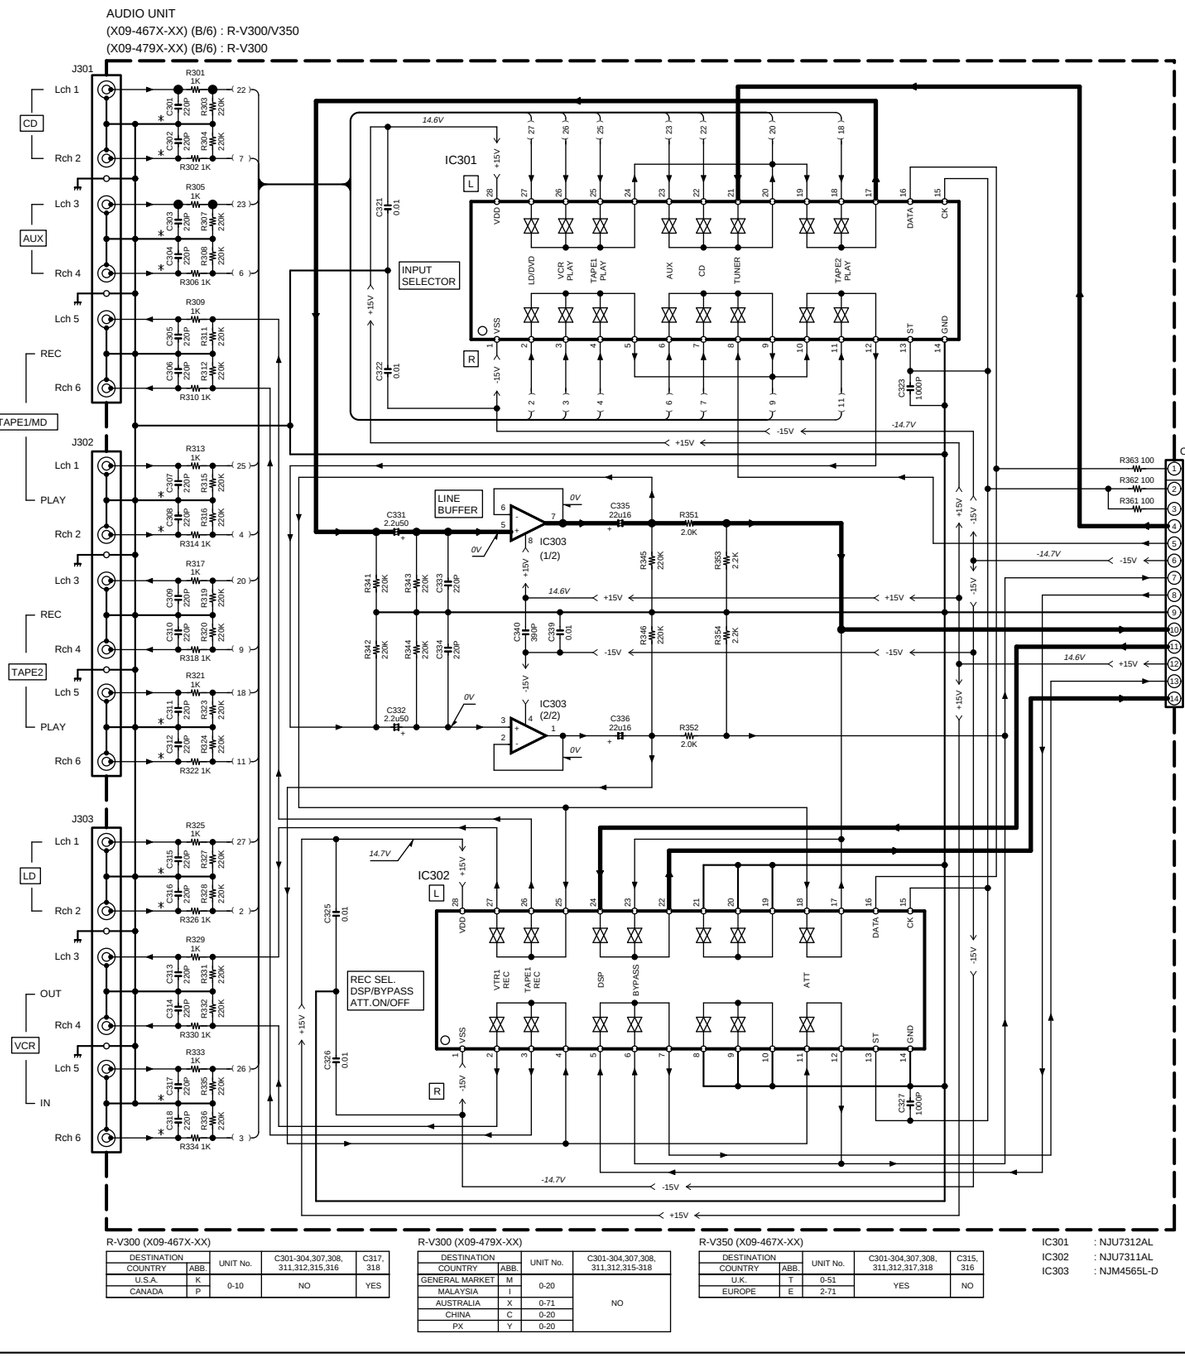

R-V300 (X09-467X-XX)

DESTINATION		UNIT No.	C301-304,307,308, 311,312,315,316	C317, 318
COUNTRY	ABB.			
U.S.A.	K	0-10	NO	YES
CANADA	P			

R-V300 (X09-479X-XX)

DESTINATION		UNIT No.	C301-304,307,308, 311,312,315-318
COUNTRY	ABB.		
GENERAL MARKET	M	0-20	NO
MALAYSIA	I		
AUSTRALIA	X	0-71	
CHINA	C	0-20	
PX	Y	0-20	

R-V350 (X09-467X-XX)

DESTINATION		UNIT No.	C301-304,307,308, 311,312,317,318	C315, 316
COUNTRY	ABB.			
U.K.	T	0-51	YES	NO
EUROPE	E	2-71		

IC301	: NJU7312AL
IC302	: NJU7311AL
IC303	: NJM4565L-D

X14-E/11 -CN8 5/5 D

X14-A/11 -CN1 5/5 E

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

R-A100/A150/V300/V350(M) (3/5)

Y05-3540-20

R-A100/A150/V300/V350

KENWOOD

AUDIO UNIT
(X09-467X-XX) (A/6) : R-V300/V350
(X09-479X-XX) (A/6) : R-V300

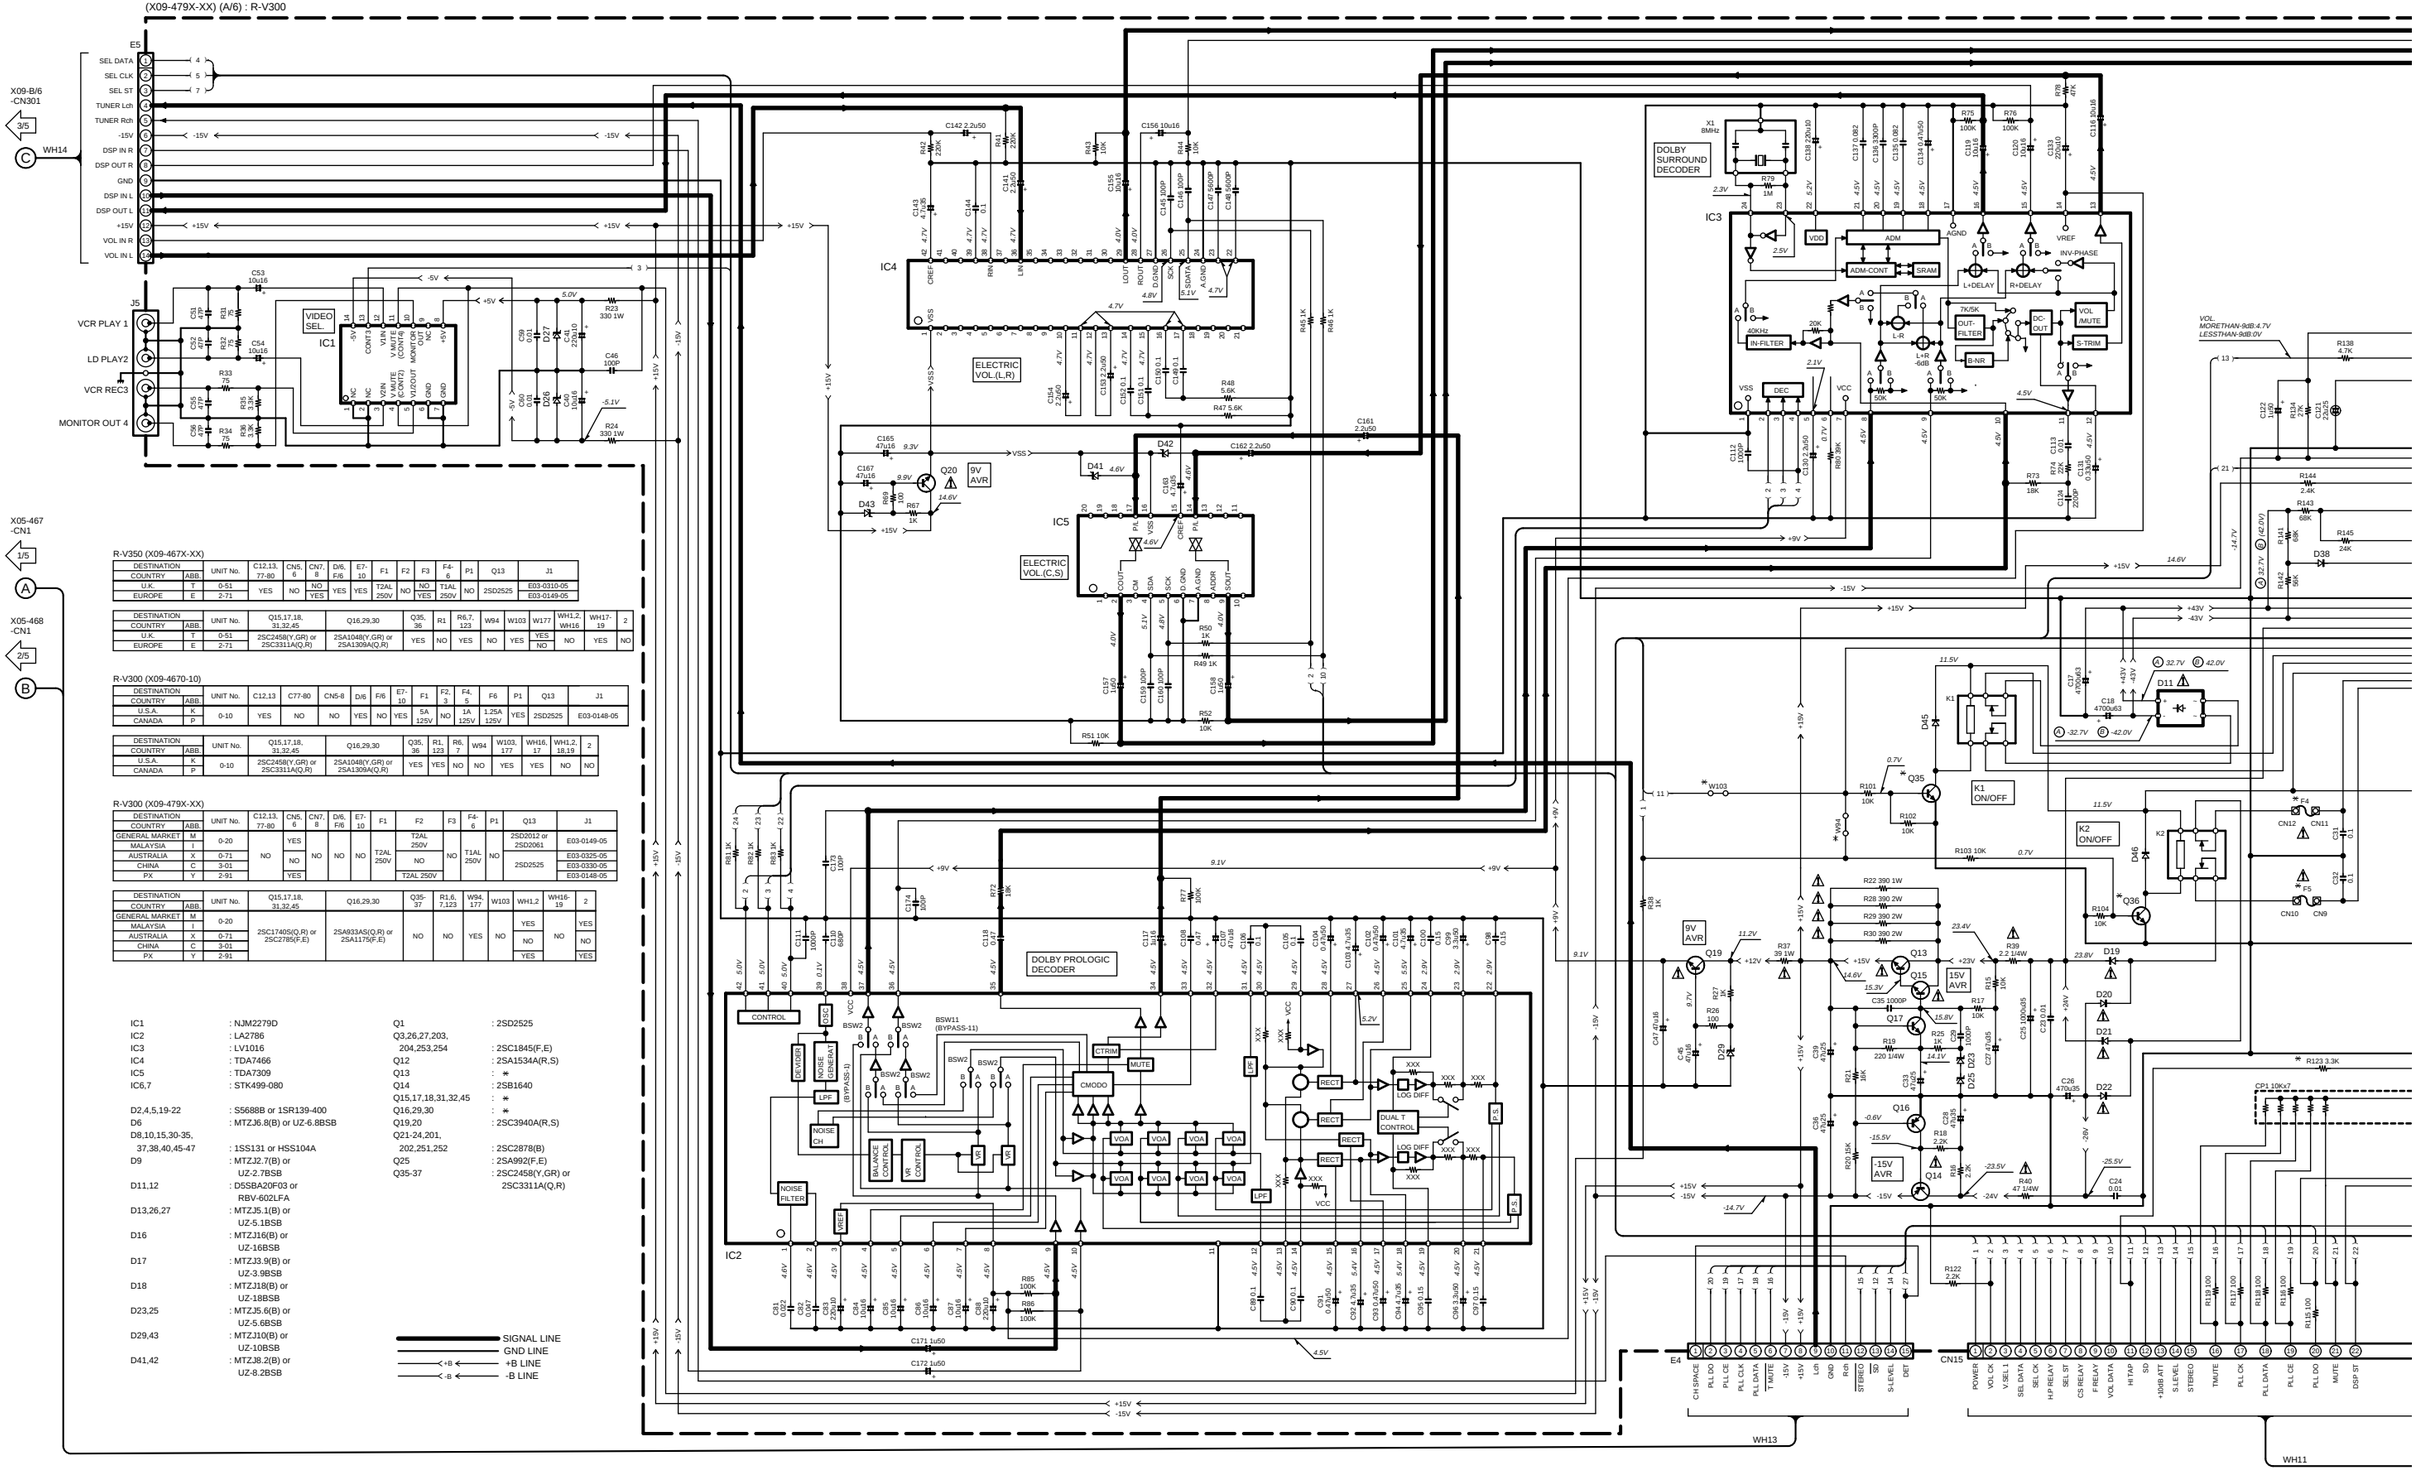

X05-467 -CN1 1/5 A
X05-468 -CN1 2/5 B

R-V350 (X09-467X-XX)

DESTINATION		UNIT No.	C12.13. 77-80	CN5, 6	CN7, 8	D/6, F/6	E7-10	F1	F2	F3	F4-6	P1	Q13	J1
COUNTRY	ABB.													
U.K.	T	0-51	YES	NO	NO	YES	YES	T2AL 250V	NO	NO	T1AL 250V	NO	2SD2525	E03-0310-05
EUROPE	E	2-71			YES					YES				E03-0149-05

DESTINATION		UNIT No.	Q15,17,18, 31,32,45	Q16,29,30	Q35, 36	R1	R6,7, 123	W94	W103	W177	WH1,2, WH16	WH17-19	2
COUNTRY	ABB.									YES			
U.K.	T	0-51	2SC2458(Y,GR) or 2SC3311A(Q,R)	2SA1048(Y,GR) or 2SA1309A(Q,R)	YES	NO	YES	NO	YES	NO	NO	YES	NO
EUROPE	E	2-71											

R-V300 (X09-4670-10)

DESTINATION		UNIT No.	C12,13	C77-80	CN5-8	D/6	F/6	E7-10	F1	F2, 3	F4, 5	F6	P1	Q13	J1
COUNTRY	ABB.														
U.S.A.	K	0-10	YES	NO	NO	YES	NO	YES	5A 125V	NO	1A 125V	1.25A 125V	YES	2SD2525	E03-0148-05
CANADA	P														

DESTINATION		UNIT No.	Q15,17,18, 31,32,45	Q16,29,30	Q35, 36	R1, 123	R6, 7	W94	W103, 177	WH16, 17	WH1,2, 18,19	2
COUNTRY	ABB.											
U.S.A.	K	0-10	2SC2458(Y,GR) or 2SC3311A(Q,R)	2SA1048(Y,GR) or 2SA1309A(Q,R)	YES	YES	NO	NO	YES	YES	NO	NO
CANADA	P											

R-V300 (X09-479X-XX)

DESTINATION		UNIT No.	C12,13, 77-80	CN5, 6	CN7, 8	D/6, F/6	E7-10	F1	F2	F3	F4-6	P1	Q13	J1
COUNTRY	ABB.													
GENERAL MARKET	M	0-20	NO	YES	NO	NO	NO	T2AL 250V	T2AL 250V	NO	T1AL 250V	NO	2SD2012 or 2SD2061	E03-0149-05
MALAYSIA	I													
AUSTRALIA	X	0-71		NO					NO				2SD2525	E03-0325-05
CHINA	C	3-01												E03-0330-05
PX	Y	2-91		YES				T2AL 250V						E03-0148-05

DESTINATION		UNIT No.	Q15,17,18, 31,32,45	Q16,29,30	Q35-37	R1, 7,123	W94, 177	W103	WH1,2	WH16-19	2
COUNTRY	ABB.										
GENERAL MARKET	M	0-20	2SC1740S(Q,R) or 2SC2785(F,E)	2SA933AS(Q,R) or 2SA1175(F,E)	NO	NO	YES	NO	YES	NO	YES
MALAYSIA	I										
AUSTRALIA	X	0-71							NO		NO
CHINA	C	3-01									
PX	Y	2-91							YES		YES

IC1	: NJM2279D	Q1	: 2SD2525
IC2	: LA2786	Q3,26,27,203, 204,253,254	: 2SC1845(F,E)
IC3	: LV1016	Q12	: 2SA1534A(R,S)
IC4	: TDA7466	Q13	: ※
IC5	: TDA7309	Q14	: 2SB1640
IC6,7	: STK499-080	Q15,17,18,31,32,45	: ※
		Q16,29,30	: ※
D2,4,5,19-22	: S5688B or 1SR139-400	Q19,20	: 2SC3940A(R,S)
D6	: MTZJ6.8(B) or UZ-6.8BSB	Q21-24,201, 202,251,252	: 2SC2878(B)
D8,10,15,30-35, 37,38,40,45-47	: 1SS131 or HSS104A	Q25	: 2SA992(F,E)
D9	: MTZJ2.7(B) or UZ-2.7BSB	Q35-37	: 2SC2458(Y,GR) or 2SC3311A(Q,R)
D11,12	: D5SBA20F03 or RBV-602LFA		
D13,26,27	: MTZJ5.1(B) or UZ-5.1BSB		
D16	: MTZJ16(B) or UZ-16BSB		
D17	: MTZJ3.9(B) or UZ-3.9BSB		
D18	: MTZJ18(B) or UZ-18BSB		
D23,25	: MTZJ5.6(B) or UZ-5.6BSB		
D29,43	: MTZJ10(B) or UZ-10BSB	SIGNAL LINE	
D41,42	: MTZJ8.2(B) or UZ-8.2BSB	GND LINE	
		+B LINE	
		-B LINE	

CAUTION: *For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.*

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

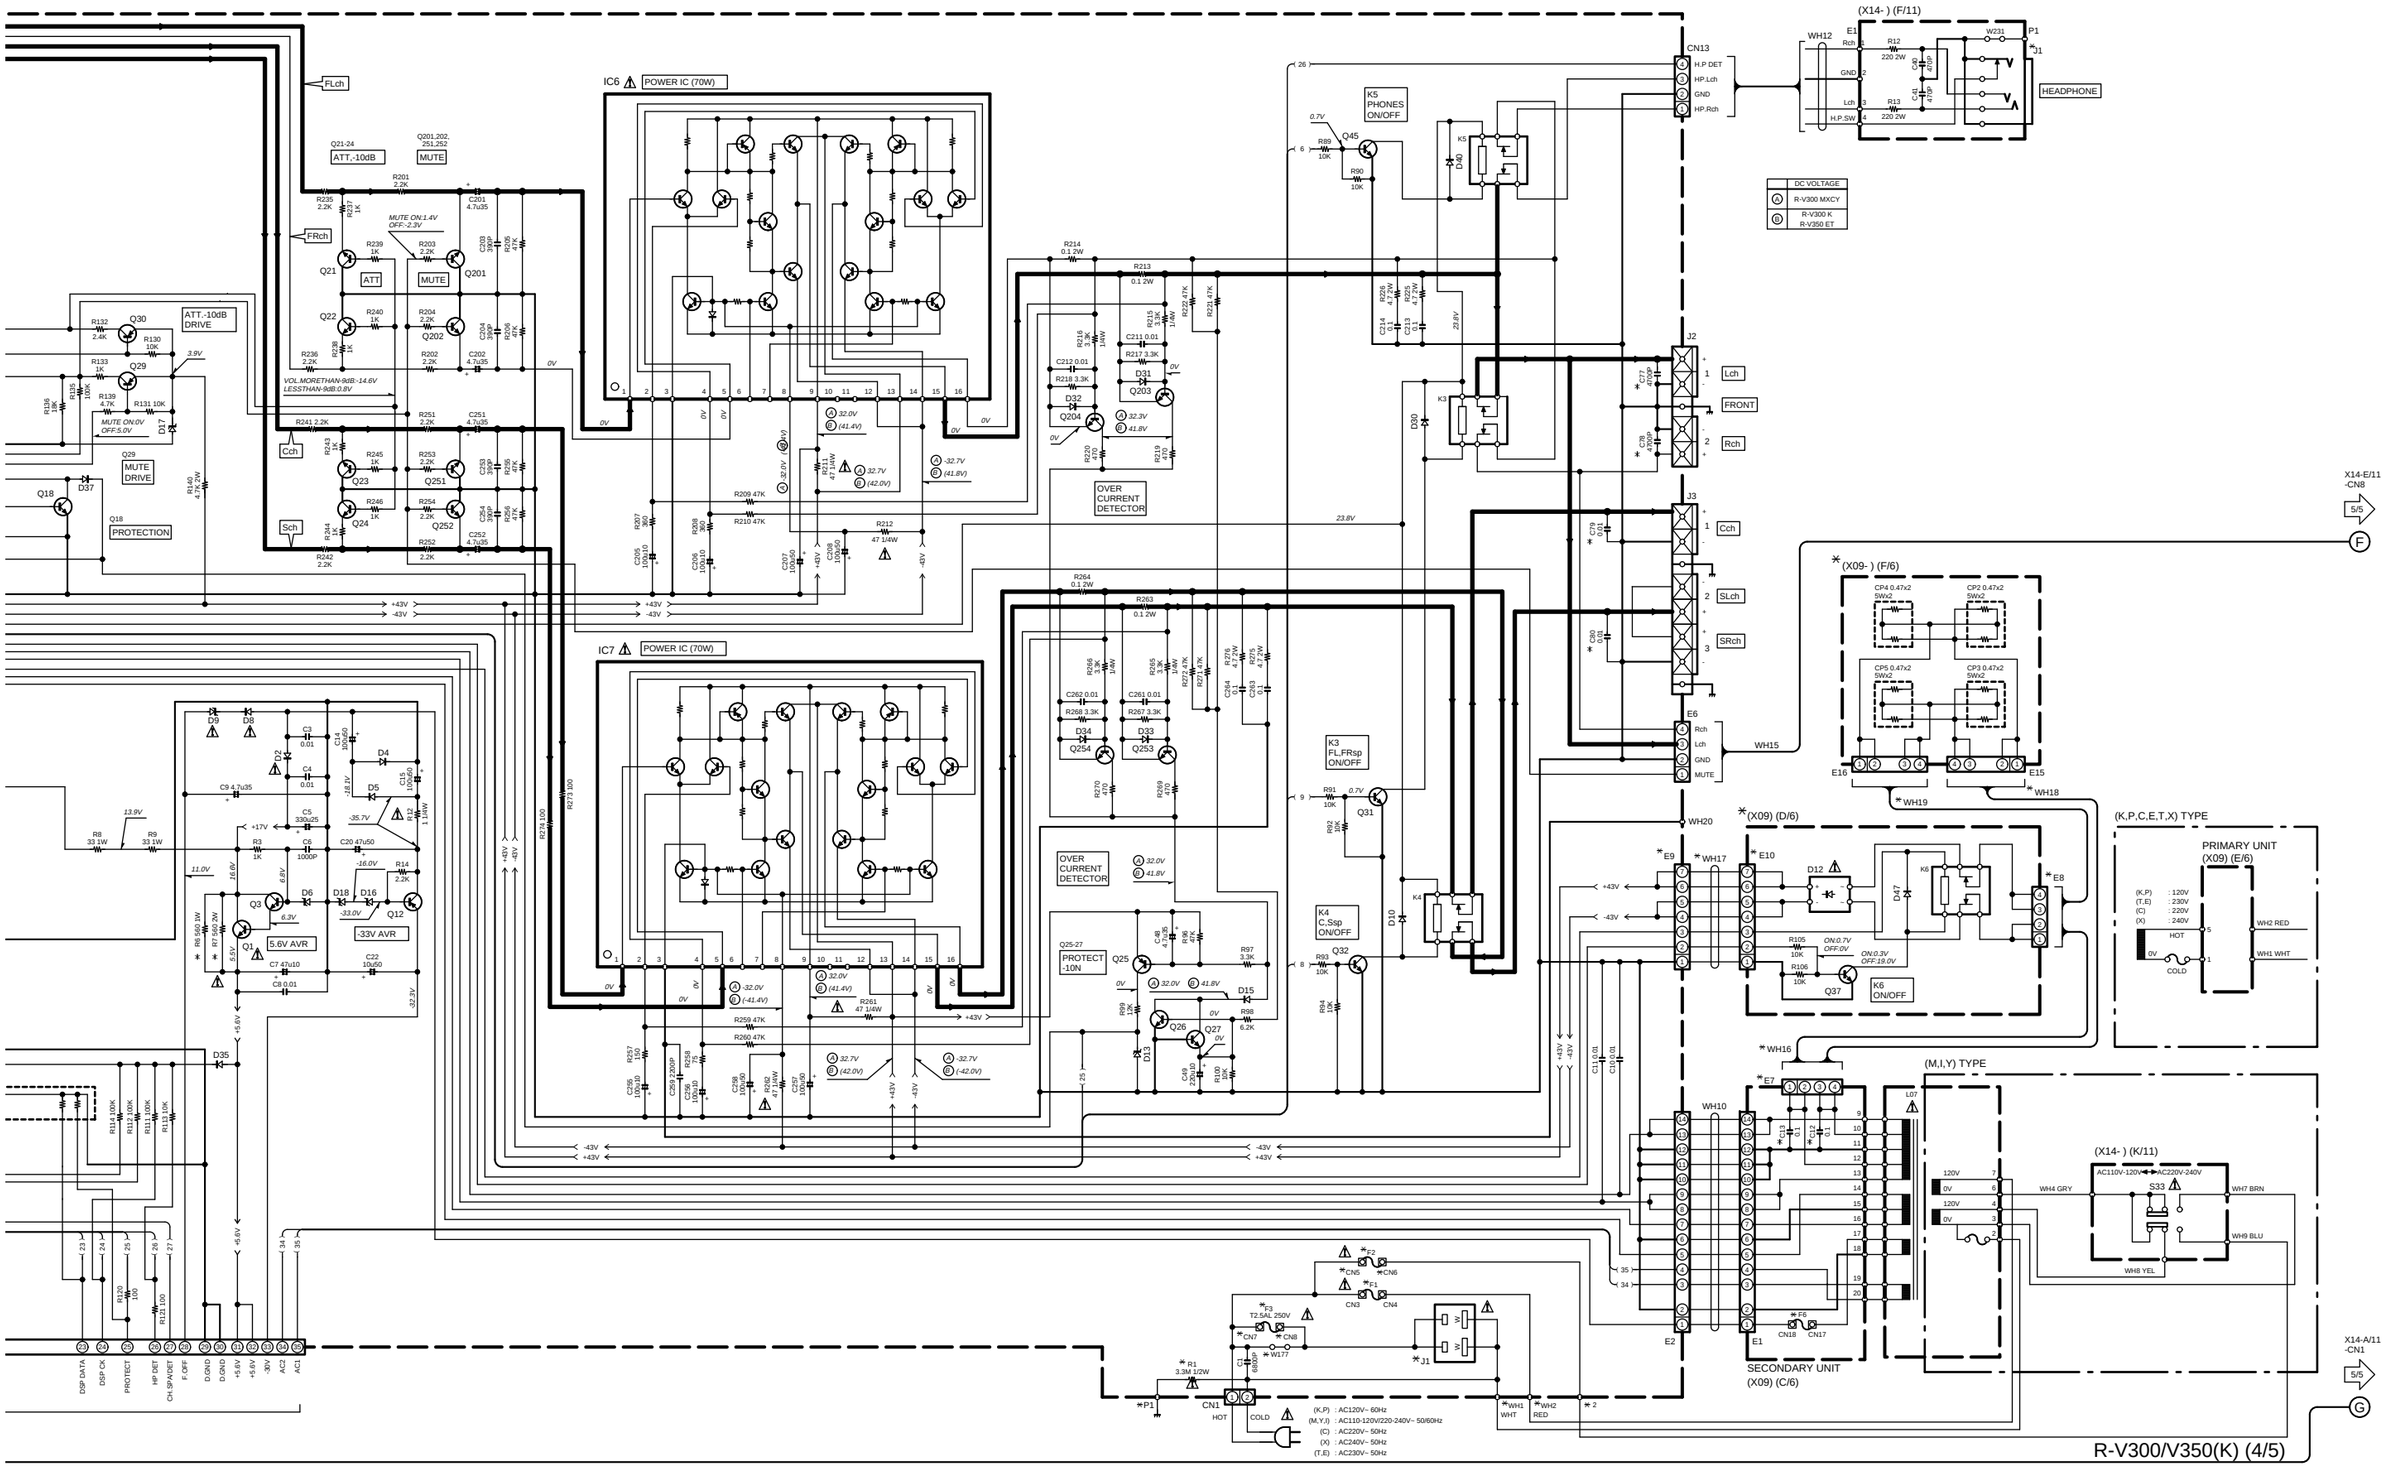
IC6 POWER IC (70W)
IC7 POWER IC (70W)
FLch
FRch
Cch
Sch
ATT.-10dB DRIVE
MUTE
ATT
PROTECTION
OVER CURRENT DETECTOR
K5 PHONES ON/OFF
K3 FL,FRsp ON/OFF
K4 C,Ssp ON/OFF
K6 ON/OFF
PROTECT -10N
5.6V AVR
-33V AVR
CN13
H.P DET
HP.Lch
GND
HP.Rch
HEADPHONE
(X14-) (F/11)
J2
J3
Lch
Rch
Cch
SLch
SRch
FRONT
E6
WH15
(X09-) (F/6)
WH18
WH19
WH20
(X09) (D/6)
E9
E10
E8
WH17
WH16
E7
WH10
E2
E1
SECONDARY UNIT
(X09) (C/6)
(K,P,C,E,T,X) TYPE
PRIMARY UNIT
(X09) (E/6)
(M,I,Y) TYPE
(X14-) (K/11)
AC110V-120V
AC220V-240V
S33
WH4 GRY
WH7 BRN
WH9 BLU
WH8 YEL
WH1 WHT
WH2 RED
CN1
HOT
COLD
P1
J1
F1
F2
F3
T2.5AL 250V
W177
DC VOLTAGE
R-V300 MXCY
R-V300 K
R-V350 ET
X14-E/11 -CN8
5/5
F
X14-A/11 -CN1
G
(K,P) : AC120V~ 60Hz
(M,Y,I) : AC110-120V/220-240V~ 50/60Hz
(C) : AC220V~ 50Hz
(X) : AC240V~ 50Hz
(T,E) : AC230V~ 50Hz
DSP DATA
DSP CK
PROTECT
HP DET
CH-SP.ADET
F. OFF
D.GND
D.GND
+5.6V
+5.6V
-30V
ACS
ACS
+43V
-43V
+5.6V
-32.0V
-32.7V
23.8V
25
26
23
24
25
26
27
34
35
35
34
2
1
2
1
2
1

X09-A/3 -E14 3/5 D
X09-A/5 -E6 4/5 F
X09-A/3 -CN12 3/5 E
X09-A/5 -CN15 4/5 G

(X14-4XXX-XX) (A/11)

WH1
KS5 KS4 LED G LED R KR1 GND +5V KR2 REMOTE KR2 KR0 KR1 KR3

W200 W201 W202 W203 W204 W41

(EXEPT E.T) TIMER SET (E.T ONLY) SET 2 S7
(EXEPT E) TIMER MODE (E.T ONLY) SET1 S16
(EXEPT E) CLOCK SET (E.T ONLY) ON/OFF S23
AUTO S32
A.MEMO S8
BAND S17
TURN< S24
TURN> S30

D15 D16 D14 D11
KS4 KS5 KS3 KS1 KR0 KR1 KR2 KR3
S12 S11 S13 S15

(X14-) (G/11)
D12 D38 W92 A1 REMOTE SENSOR

(X14-) (C/11)
Q3,4 LED DRIVER D41
Q3 Q4 D7 A2 REMOTE SENSOR
R2 2.2K R14 2.2K R3 220 R11 220 R1 10K R15 10K W93 W99 R54 680
C5 100u10
R18 47 1/4W
CN2 KS5 KS4 LED G LED R KR1 GND +5V KR2 REMOTE KR2 KR0 KR1 KR3
ON/ STAND BY S31 S1
INPUT< S4
INPUT> S13
TAPE2 S22

(X14-) (H/11)
D5 D32 D3 D8 W103 W106 W94

(X14-) (D/11)
D6 D42 D4 D9
R42 R43 R44 R45 R46 R47
Q2 Q1 R10 1K R9 1K R19 470 R8 470 C2 100u10
LED DRIVER
MODE /CLK S9
MULTI /MODE S18
MULTI /SET S25

S29 S28 W118 W119
R16 10K C3 100P C4 100P R17 10K
CN3 ENC2 ENC1 KS2 REM OUT KS1 KR2 GND +5V REM+5V KR0 KR1 KS3 KR3
5.0V 5.4V

(X14-) (J/11)
W14 W17 W13 W33 W21 W28 W23
CLOCK SET S2
TIMER MODE S3
TIMER SET S14
ON/OFF S5
SET1 S6
SET2 S15

(X14-) (I/11)
W104 W109 W107 W110 W105 W101
AUTO S10
TURN< S19
TURN> S26
A.MEMO S11
BUND S20
PTY S12
TA/NEWS S21
DISPLAY S27

WH2 ENC2 ENC1 KS2 REM OUT KS1 KR2 GND +5V REM+5V KR0 KR1 KS3 KR3
D13 D2 D17

CP3 4.7Kx12
CP1 4.7Kx11
CP2 10Kx3
R22 R23 R73 R78 R82 R36 4.7K R55 R57 R59 R61 R63 R64 R65 R66

TC9215 VOICE ON/OFF STB1 DATA CLK VOICE DEP1 VOL CLK RWRREQ RWR RTRRM INP7 INP6 INP5 INP4 INP3
SEL REM OUT INTERLOCUTION

F-RELAY CS-RELAY VDD TAPE2/ADP VOL DATA +10db ATT VSS REM IN DATA CLK RDS AVREFO AVDD RDS SLEVEL SD STEREO
R37 100K R33 100K R24 220 R25 220 R26 100K R20 220 R34 100K R32 100K R50 100K R51 220 R41 2.2K R52 220 R53 220 R40 2.2K

TUNER
T MUTE PLL CLK DT CE PLL DO AVSS MUTE ST DT CLK SDATA SBUSY PROTECTION VDD XT1 XT2
R35 220 R60 4.7M R83 470K X2 32.768KHz C9 22P C10 22P C16 0.1 R81 100K
D25 D27 D19 D23 D24 D26 D1 D20 D18
R74 330 R75 100K R76 100K R77 100K R72 100K R73 100K

IC1 (BOTTOM VIEW) u-COM

CN1 POWER VOL CLK V.SEL1 SEL DT SEL CLK 9215CONT SEL STB C.S.RELAY F.RELAY VOL DATA TAPE/EDET SD +10VBATT RDS S.LEV STEREO T.MUTE CLK DT CE PLL DO MUTE DSP STB DSP DT DSP CLK PROTECT HP DET CH.SPACE F.OFF D.GND D.GND +5.6V +5.6V -30V F1 F2

CC | CD | CE | CF | CG | CH | CI | CJ | CK | CL

IC3
(BOTTOM VIEW)
INTERRUPT COMMUNICATION u-COM

(X14-) (E/11)

CN8
SUB WOOFER PRE OUT
MUTE CONTROLLER
BUFFER
MIC
SYSTEM CONTROL

(X14-) (B/11)

CN6
CN50
RDS DEMODULATOR
IC52
CHANNEL SPACE CONTROLLER
FL SEGMENT DRIVER
RESET IC

ANODE CONNECTION

	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
P1	RDS	a	a	a	a	a	a	a	a	a	dB
P2	INFO.	j	j	j	j	j	j	j	j	j	ms
P3	MEMO	h	h	h	h	h	h	h	h	h	kHz
P4	EON	k	k	k	k	k	k	k	k	k	MHz
P5	NEWS	b	b	b	b	b	b	b	b	b	PRO LOGIC
P6	FM	f	f	f	f	f	f	f	f	f	3 STEREO
P7	AM	g	g	g	g	g	g	g	g	g	DSP
P8	PTY	m	m	m	m	m	m	m	m	m	EX.BASS
P9	TP	c	c	c	c	c	c	c	c	c	TAPE2
P10	TA	e	e	e	e	e	e	e	e	e	S.DIRECT
P11	MW	r	r	r	r	r	r	r	r	r	SRS 3D
P12	LW	n	n	n	n	n	n	n	n	n	SLEEP
P13	TIMER	p	p	p	p	p	p	p	p	p	AUTO
P14	1	d	d	d	d	d	d	d	d	d	STEREO
P15	2	-	-	-	-	-	-	col	-	-	TUNED
P16	-	-	-	-	-	-	-	Dp	-	-	MUTE

(10G-2G)

ED1

11G 10G 9G 8G 7G 6G 5G 4G 3G 2G

P1 RDS INFO. MEMO P2 P3
P4 EON NEWS P5 P6 FM
P8 PTY TP TA P9 P10 P7 AM
P13 TIMER P14 1 P15 2 P12 LW
P11 MW

P1 dB — P5 PRO LOGIC
P2 ms — P6 3 STEREO
P3 kHz — P7 DSP
P4 MHz — P8 EX.BASS
Col
Dp

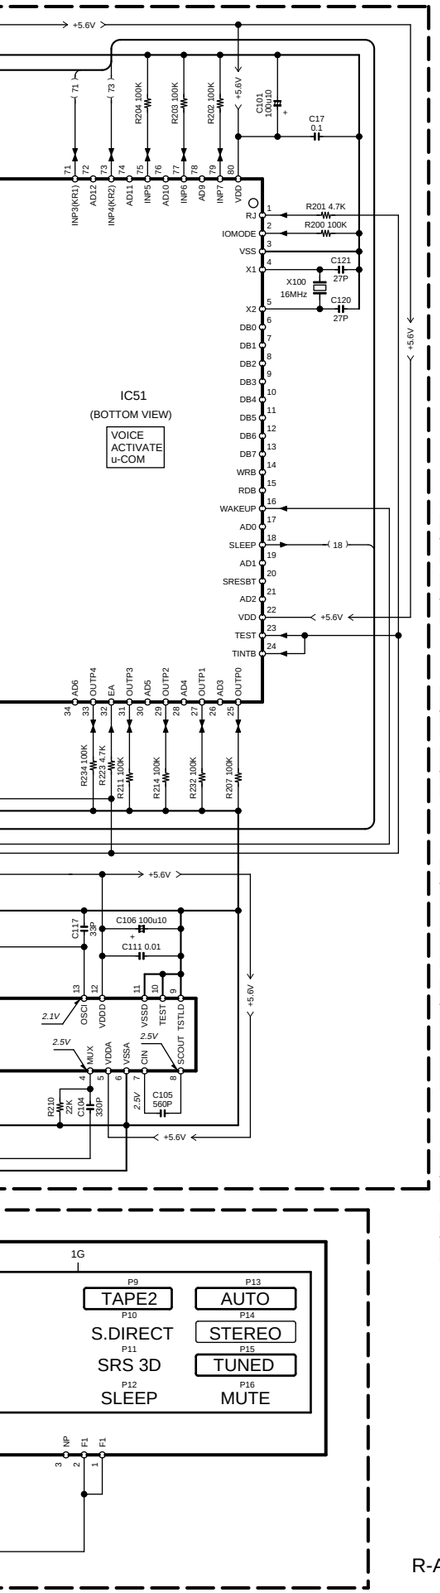

IC1 : ⚹
IC2 : S-806D-Z
IC3 : uPD17215GT-737
IC51 : RF5S830-0021
IC52 : SAA6579

Q1,2 : 2SC3246
Q3,4,101 : 2SA1048(Y,GR) or 2SA1309A(Q,R)
Q5 : 2SA933AS(Q,R) or 2SA1175(F,E)
Q6 : 2SC4116(Y,GR)
Q7 : ⚹

Q8,100,102 : 2SC2458(Y,GR) or 2SC3311A(Q,R)
Q10 : 2SC2878(B)

D1,2,18,20-22,24-27,29-31,33,34, 36,37,39,40,43,44,100-107 : 1SS131 or HSS104A
D3-6,8,9,32,42 : B30-2519-05
D38,41 : B30-2493-05
D10,11,13-16,19,23,28 : MA110
D7,12 : B30-2507-05
D17 : S5688B or 1SR139-400
D35 : MTZJ6.2(B) or UZ-6.2BS8

CAUTION: *For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.*

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

R-A100

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	(B/11) (H/11) (F/11)	ⒶⒸⒹⒼⒽⒾ	ⒷⒺⒻ	CN4,5	CN6	WH3	W9,41,92,94,103, 106,119,200,201	W91,99,118, 202-204
R-A100	GENERAL MARKET	M	X14-4640-21	NO	NO	YES	YES	NO	NO	NO	YES

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	Q3,4	Q5	Q7	D7,12, 30,31,38	D29,33, 34,41	R1-3, 11,14,15	R54, 85,87	R79	R142	S1,29	S28	J2	J4	IC1
R-A100	GENERAL MARKET	M	X14-4640-21	NO	YES	2SC1740S(Q,R) or 2SC2785(F,E)	NO	YES	NO	YES	3.3 1/4W	1K	NO	YES	E11-0188-05	E63-0116-05	UPD780206GF025

R-A150(X14-448X-XX)

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	(B/11)	(H/11) (F/11)	ⒶⒸⒹⒼⒽ	ⒷⒺⒻⒾ	CN4,5	CN6	WH3	W9,41,118 200,201	W91,92,94,99,103, 106,119,202-204	Q3,4
R-A150	EUROPE	E	2-72	YES	NO	NO	YES	NO	YES	YES	YES	NO	YES
	U.K.	T	0-52										

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	Q5	Q7	D7,31 34	D12,33, 38,41	D29	D30	R1-3, 11,14,15	R54, 85,87	R79	R142	S1,29	S28	J2	J4	IC1
R-A150	EUROPE	E	2-72	NO	2SC2458(Y,GR) or 2SC3311A(Q,R)	YES	NO	YES	NO	YES	NO	3.3 1/4W	1K	NO	YES	E11-0293-05	E63-0164-05	UPD780206GF027
	U.K.	T	0-52					NO	YES									

R-V300(X14-4XXX-XX)

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	(B/11)	(H/11) (F/11)	ⒶⒸⒼ	ⒷⒹⒺⒻⒽⒾ	CN4,5	CN6	WH3	W9,41,91, 118,200,201	W92,94,99,103,106, 119,202-204
R-V300	U.S.A.	K	X14-4480-10	NO	YES	YES	NO	YES	NO	NO	NO	YES
	CANADA	P										
	GENERAL MARKET	M	X14-4640-20									
	MALAYSIA	I										
	PX	Y										
	AUSTRALIA	X	X14-4640-71									
	CHINA	C	X14-4643-01									

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	Q3,4	Q5	Q7	D7,12, 31,34,41	D29	D30	D33	D38	R1-3, 11,14,15	R54	R79	R85, 87	R142	S1, 29	S28	J1	J2	J4	IC1
R-V300	U.S.A.	K	X14-4480-10	NO	NO	2SC2458(Y,GR) or 2SC3311A(Q,R)	NO	NO	NO	NO	YES	NO	YES	4.7 1/4W	NO	620	YES	NO	E11-0280-05	E11-0188-05	E63-0116-05	UPD780206GF027
	CANADA	P																				
	GENERAL MARKET	M	X14-4640-20		YES	2SC1740S(Q,R) or 2SC2785(F,E)		YES	NO	YES	YES				YES							UPD780206GF025
	MALAYSIA	I																				
	PX	Y																				
	AUSTRALIA	X	X14-4640-71		NO				YES	NO					NO							
	CHINA	C	X14-4643-01		YES				NO	YES					YES							

R-V350(X14-448X-XX)

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	(B/11) (H/11) (F/11)	ⒶⒸⒼ	ⒷⒺⒻ	ⒹⒽⒾ	CN4,5	CN6	WH3	W9,41,91,92,99, 118,200,201	W94,103,106, 119,202-204	Q3,4
R-V350	U.K.	T	0-51	YES	YES	NO	YES	NO	YES	YES	NO	YES	YES
	EUROPE	E	2-71										

MODEL NAME	DESTINATION COUNTRY	ABB.	UNIT No.	Q5	Q7	D7,33,34, 38,41	D12, 31	D29	D30	R1-3, 11,14,15	R54,85, 87	R79	R142	S1, 29	S28	J1	J2	J4	IC1
R-V350	U.K.	T	0-51	NO	2SC2458(Y,GR) or 2SC3311A(Q,R)	NO	YES	NO	YES	YES	NO	4.7 1/4W	620	YES	NO	E11-0282-05	E11-0293-05	E63-0164-05	UPD780206GF027
	EUROPE	E	2-71					YES	NO										

SIGNAL LINE
GND LINE
+B LINE
-B LINE

R-A100/A150/V300/V350(M) (5/5)

2SA1534A
2SA992
2SC1845
2SC2878
2SC3246
2SC3940A



2SB1624
2SD2493



2SA1175
2SC2785



2SA1048
2SC1740S
2SC2458



2SA1586
2SB1218A
2SC2714
2SC4081
2SC4116
2SD1819A
2SD2114K

2SC4137F50



2SD2061

2SA1309A
2SC3311A



2SD2012

2SD1757K



NJM4565D-D



NJM2279D



TC9215AP



TDA7309



SAA6579



TDA7466



NJM4565M



2SK302

LA1836



LC72131



LA2786



NJM4565L-D



LA1832
LV1016



NJU7311AL
NJU7312AL



Y05-3540-20

R-A100/A150/V300/V350

KENWOOD

EXPLODED VIEW (UNIT)

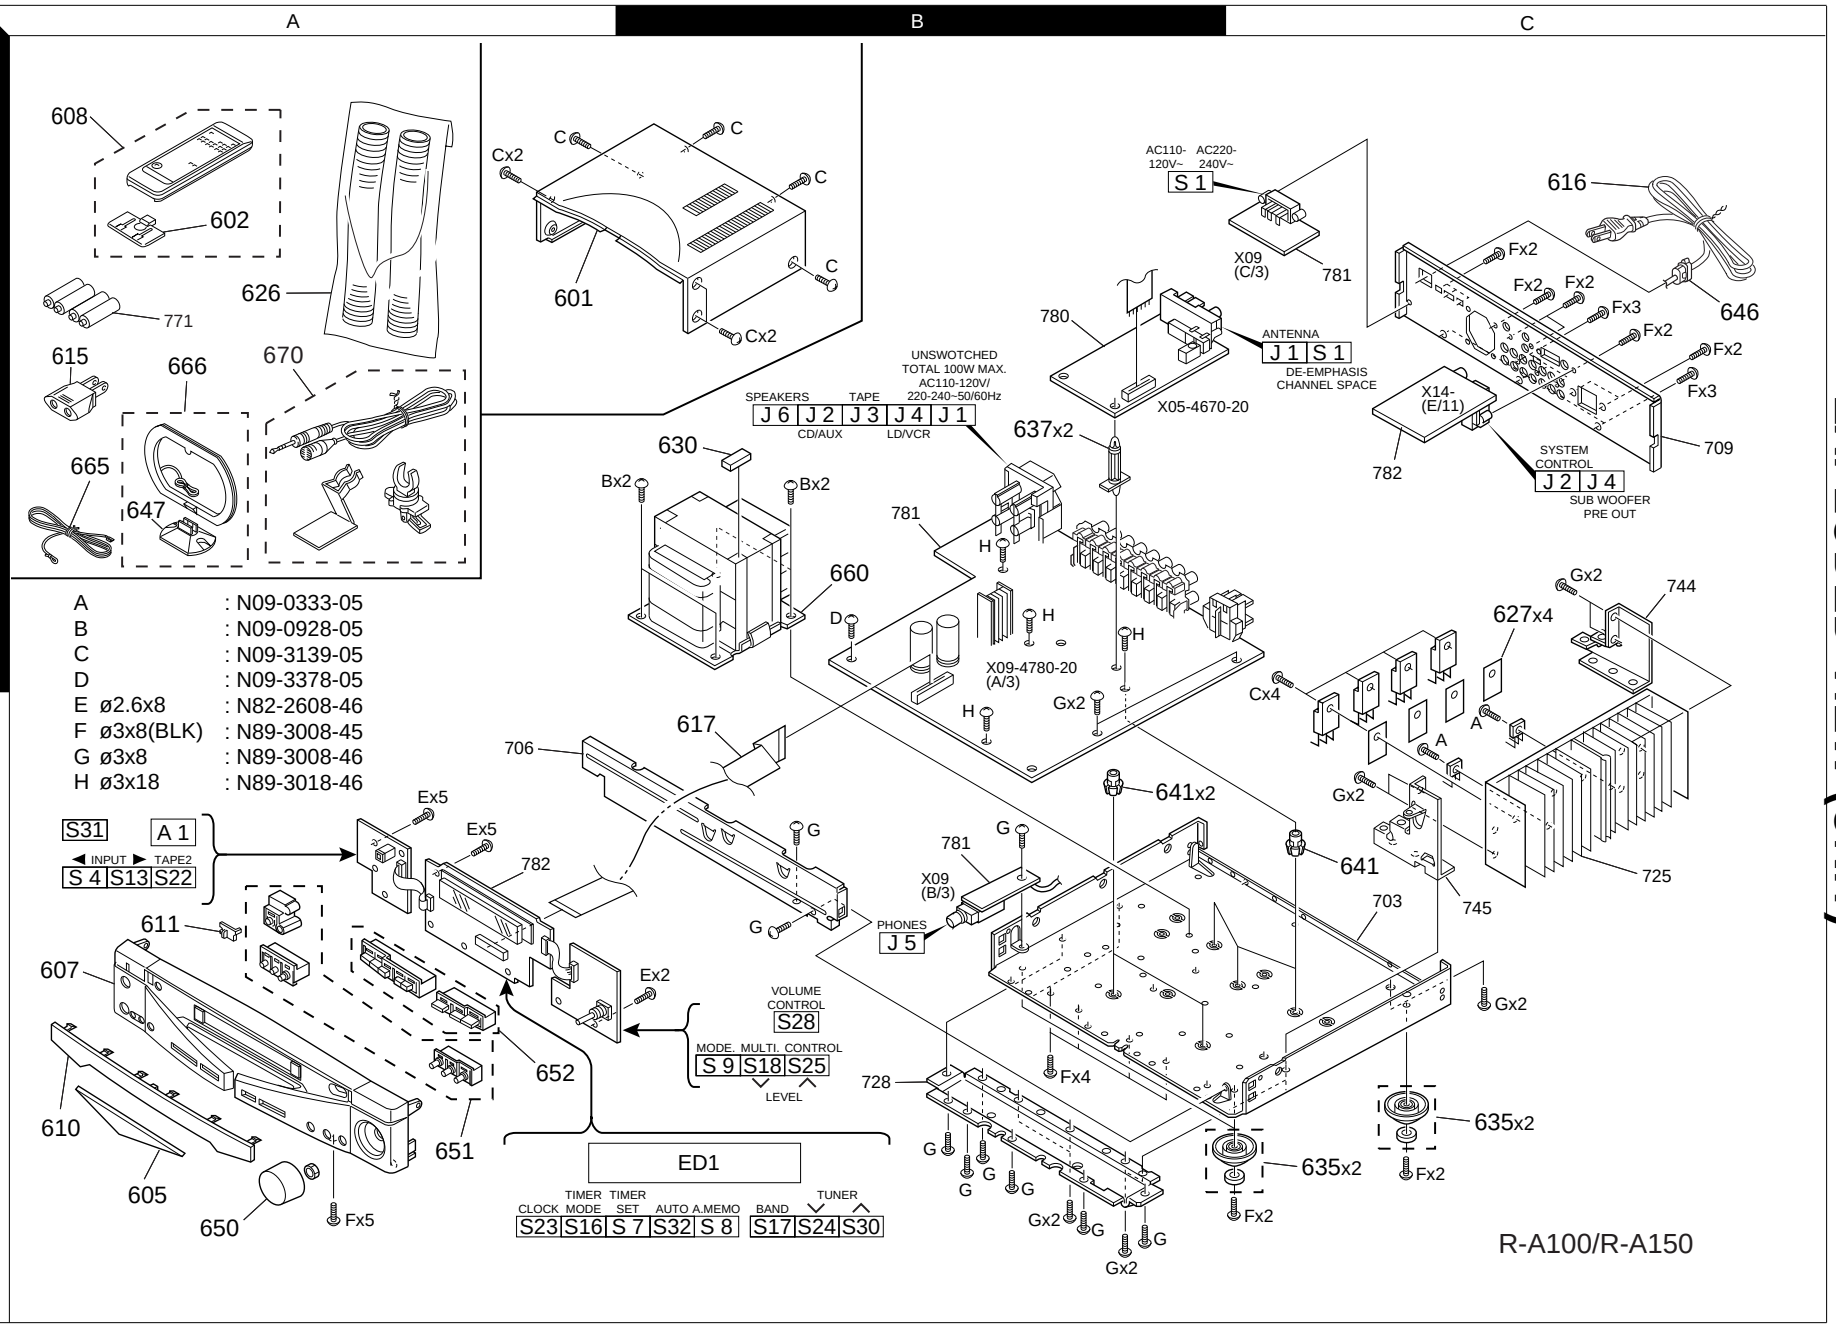

A		: N09-0333-05
B		: N09-0928-05
C		: N09-3139-05
D		: N09-3378-05
E	ø2.6x8	: N82-2608-46
F	ø3x8(BLK)	: N89-3008-45
G	ø3x8	: N89-3008-46
H	ø3x18	: N89-3018-46

Parts with exploded view numbers larger than 700 are not supplied.

R-A100/A150/V300/V350

EXPLODED VIEW (UNIT)

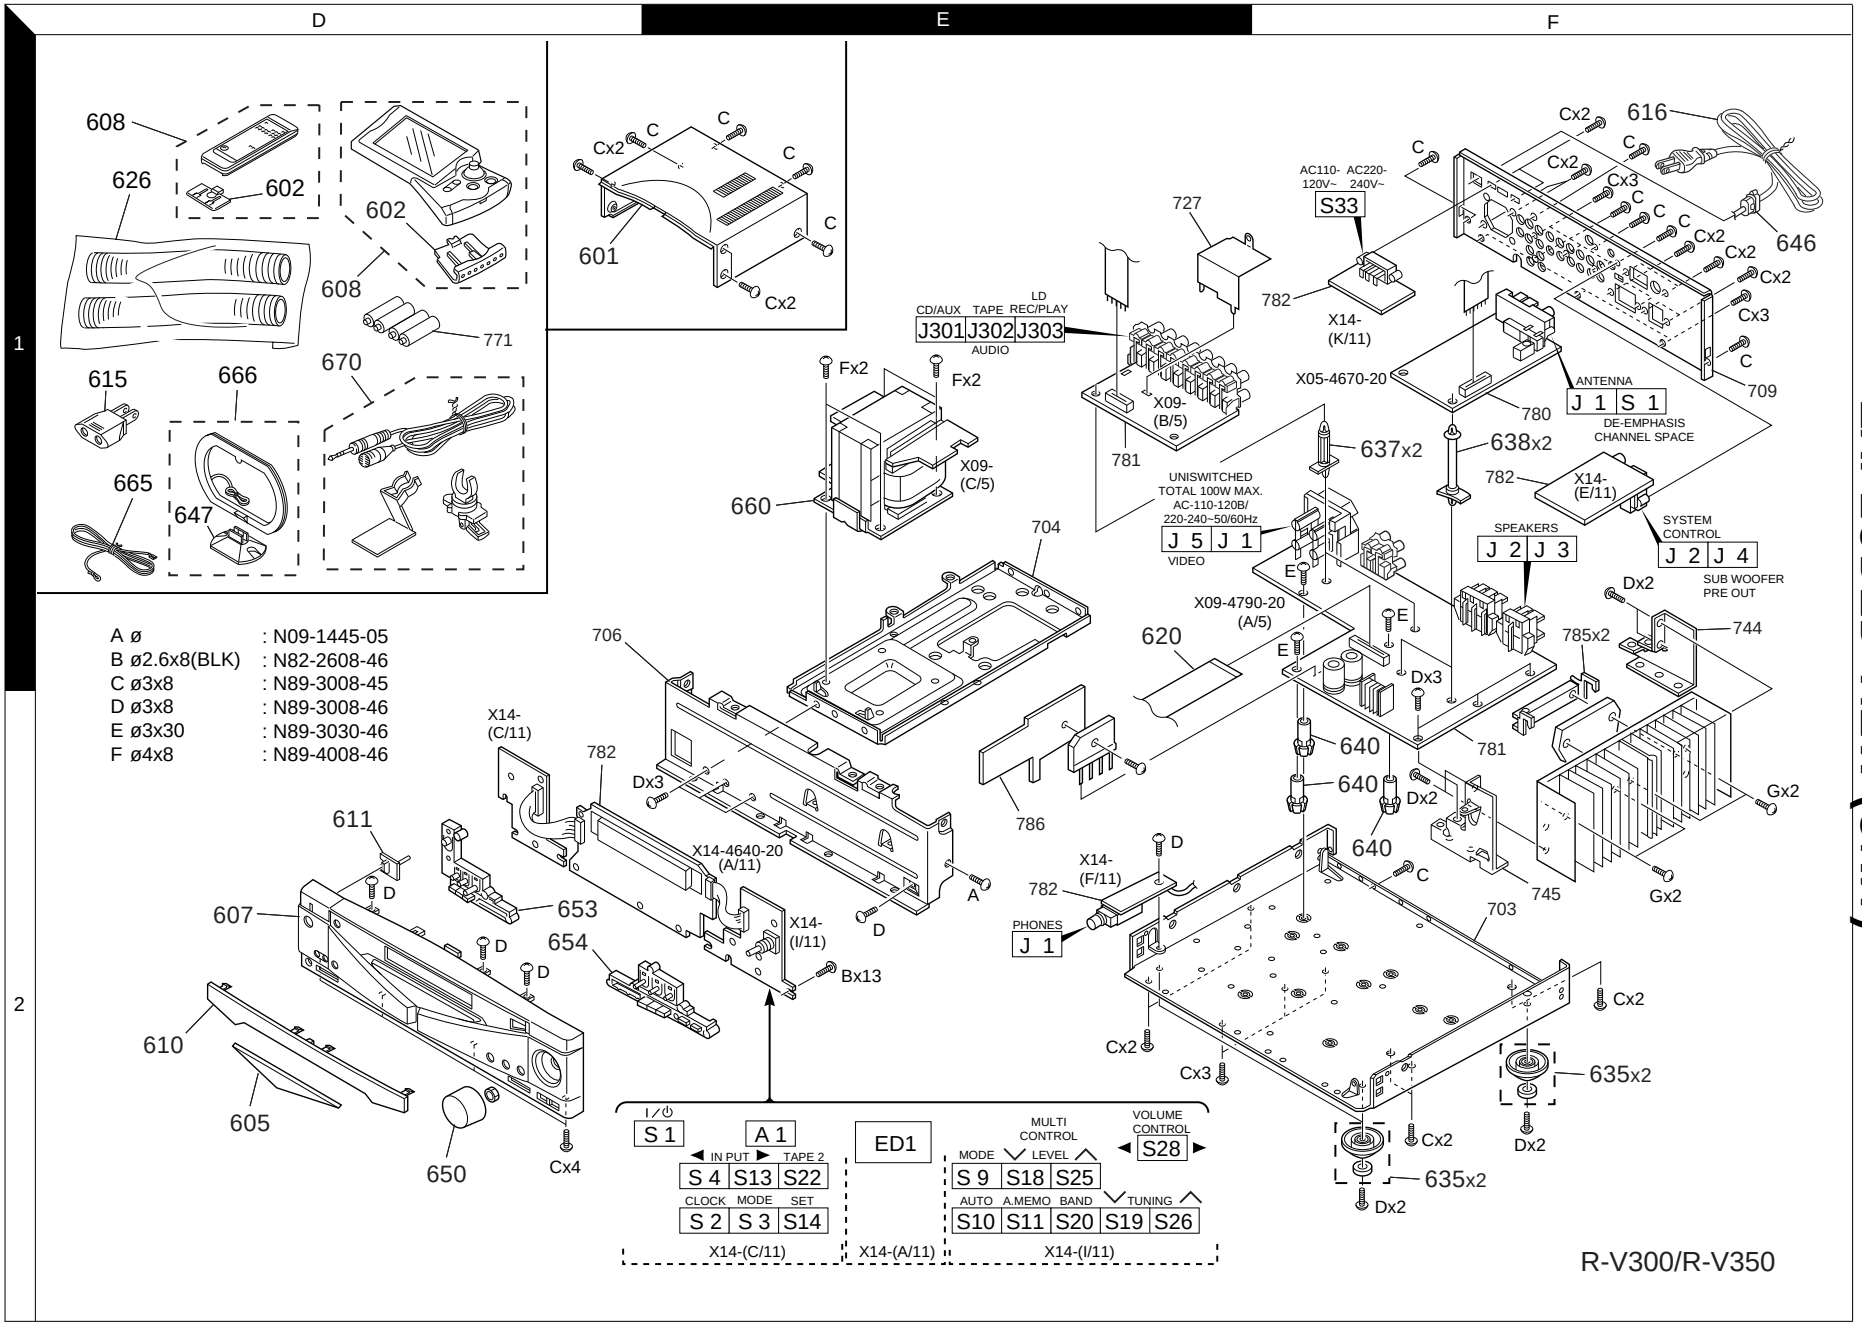

A ø : N09-1445-05
B ø2.6x8(BLK) : N82-2608-46
C ø3x8 : N89-3008-45
D ø3x8 : N89-3008-46
E ø3x30 : N89-3030-46
F ø4x8 : N89-4008-46

Parts with exploded view numbers larger than 700 are not supplied.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❶

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
R-A100/A150						
601	1A	✻	A01-3459-01	METALLIC CABINET		
602	1A		A09-0357-08	BATTERY COVER (RC-S0300)		
605	2A	✻	A21-1984-03	DRESSING PANEL (R-A150)		
605	2A	✻	A21-1990-03	DRESSING PANEL (R-A100)		
607	2A	✻	A60-1193-01	PANEL (R-A100)		
607	2A	✻	A60-1194-01	PANEL (R-A150)		
608	1A	✻	A70-1149-15	REMOCON (RC-S0300)		
610	2A		B10-2347-02	FRONT GLASS (R-A150)		
610	2A		B10-2385-02	FRONT GLASS (R-A100)		
611	2A		B12-0311-04	INDICATOR		
-			B46-0310-03	WARRANTY CARD (R-A150)		
-			B58-0945-03	CAUTION CARD (R-A150)	T	
-		✻	B58-0965-13	CAUTION CARD(PL)(R-A150)	T	
-		✻	B58-0966-13	CAUTION CARD(PL) (R-A100/A150)	EM	
-		✻	B59-1147-03	SUB-INSTRUCTION MANUAL		
-		✻	B59-1148-03	SUB-INSTRUCTION(R-A100/A150)	TM	
-		✻	B59-1149-03	SUB-INSTRUCTION MANUAL(R-A150)	E	
-		✻	B59-1150-03	SUB-INSTRUCTION MANUAL(R-A150)	E	
-		✻	B59-1151-03	SUB-INSTRUCTION MANUAL(R-A150)	E	
-		✻	B59-1152-03	SUB-INSTRUCTION MANUAL(R-A150)	E	
-		✻	B59-1153-03	SUB-INSTRUCTION(R-A100/A150)	EM	
-		✻	B60-3291-00	INST MANUAL(ENGLISH)(R-A100)		
-		✻	B60-3292-00	INST MANUAL(SPANISH) (R-A100)		
-		✻	B60-3293-00	INST MANUAL(SPANISH) (R-A150)	E	
-		✻	B60-3294-00	INST MANUAL(ENGLISH) (R-A150)	T	
-		✻	B60-3295-00	INST MANUAL(FRE,GER) (R-A150)	E	
-		✻	B60-3296-00	INST MANUAL(ITAL,DUTCH(R-A150)	E	
⚠ 615	1A		E03-0115-05	AC PLUG ADAPTER (R-A100)		
⚠ 616	1C		E30-2592-15	AC POWER CORD (R-A100)		
⚠ 616	1C		E30-2788-05	AC POWER CORD (R-A150)	E	
⚠ 616	1C		E30-2791-05	AC POWER CORD (R-A150)	T	
617	2B		E35-0083-05	FLAT CABLE (R-A150)		
617	2B		E35-1200-05	FLAT CABLE (R-A100)	M	
626	1D		F07-1602-04	COVER		
627	1C		F20-1322-15	INSULATING BOARD		
630	1B	✻	G11-2339-04	CUSHION		
-			H10-7286-12	POLYSTYRENE FOAMED FIX(R-A150)	E	
-			H10-7287-22	POLYSTYRENE FOAMED FIX(R-A150)	E	
-			H10-7288-12	POLYSTYRENE FOAMED FIX(R-A150)	T	
-			H10-7289-22	POLYSTYRENE FOAMED FIX(R-A150)	T	
-			H10-7371-12	POLYSTYRENE FOAMED FIX(R-A100)	M	
-			H10-7372-22	POLYSTYRENE FOAMED FIX(R-A100)	M	
-		✻	H11-0084-14	POLYSTYRENE FOAMED (R-A100/A150)		
-			H13-0086-04	CARTON BOARD (R-A150)	E	
-			H20-0568-04	PROTECTION COVER (R-A150)	E	
-			H25-0232-04	PROTECTION BAG (R-A100/A150)	EM	
-			H25-0651-04	PROTECTION BAG (R-A150)	T	
-			H25-1516-04	PROTECTION BAG (R-A100/A150)	TM	
-			H30-0100-04	ADHESIVE DOUBLE-COATED(R-A150)		
-			H30-0602-04	ADHESIVE DOUBLE-COATED(R-A100)		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❷

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
-		✻	H50-2468-04	ITEM CARTON CASE (R-A100)		
-		✻	H50-2469-04	ITEM CARTON CASE (R-A150)	T	
-		✻	H50-2470-04	ITEM CARTON CASE (R-A150)	E	
635	2C		J02-1188-03	FOOT (R-A150)		
635	2C		J02-1189-13	FOOT (R-A100)		
637	1B		J19-3331-05	UNIT HOLDER		
641	2B,2C		J19-3732-04	UNIT HOLDER (R-A150)		
641	2B,2C	✻	J19-3751-04	UNIT HOLDER (R-A100)		
⚠ 646	1C	✻	J42-0083-05	POWER CORD BUSHING		
647			J19-3645-05	LOOP ANTENNA STAND		
-			J19-3642-05	UNIT HOLDER (R-A150)		
-			J61-0098-05	WIRE BAND (R-A150)		
-			J61-0307-05	WIRE BAND (R-A100)		
650	2A		K29-6660-04	KNOB		
651	2A		K29-6661-02	KNOB (R-A150)		
651	2A		K29-6779-02	KNOB (R-A100)		
652	2A		K29-6662-02	KNOB (R-A150)		
652	2A		K29-6780-02	KNOB (R-A100)		
⚠ 660	1B	✻	L07-2382-05	POWER TRANSFORMER (R-A100)		
⚠ 660	1B	✻	L07-2383-05	POWER TRANSFORMER (R-A150)		
665	1A		T90-0809-05	LEAD WIRE ANTENNA (R-A100)		
665	1A		T90-0810-05	LEAD WIRE ANTENNA (R-A150)		
666	1A		T90-0820-05	LOOP ANTENNA		
⚠ Q71,72			2SC4137F50(V,W	TRANSISTOR		
⚠ Q73,74			2SD2493	TRANSISTOR		
⚠ Q75,76			2SB1624	TRANSISTOR		
670	1A		W01-0935-05	MICROPHONE (R-A150)		
R-V300/V350						
601	1D	✻	A01-3457-01	METALLIC CABINET		
602	1D		A09-0378-08	BATTERY COVER (RC-S0504)	IYMCX	
602	1D		A09-0378-08	BATTERY COVER (RC-S0503)		
602	1D		A09-0379-08	BATTERY COVER (GRC-150)	KP	
605	2D	✻	A21-1983-03	DRESSING PANEL (R-V300)		
605	2D	✻	A21-1989-03	DRESSING PANEL (R-V350)		
607	2D	✻	A60-1191-01	PANEL (R-V300)	KP	
607	2D	✻	A60-1192-01	PANEL (R-V350)		
607	2D	✻	A60-1233-01	PANEL (R-V300)	IMCX	
607	2D	✻	A60-1283-01	PANEL (R-V300)	Y	
608	1D		A70-1136-05	REMOCON(RC-S0504) (R-V350)	T	
608	1D		A70-1150-05	REMOCON(RC-S0503) (R-V300)	YMCX	
608	1D		A70-1159-05	REMOCON(GRC-150) (R-V300)	KP	
610	2D	✻	B10-2367-02	FRONT GLASS (R-V300/V350)	EKPT	
610	2D	✻	B10-2404-02	FRONT GLASS (R-V350)	IYMCX	
611	2D		B12-0311-04	INDICATOR		
-			B46-0096-53	WARRANTY CARD (R-V300)	X	
-			B46-0310-03	WARRANTY CARD (R-V350)		
-			B46-0326-03	WARRANTY CARD (R-V300)	C	
-			B46-0328-03	WARRANTY CARD (R-V300)	YK	
-		✻	B46-0336-03	WARRANTY CARD (R-V300)	P	
-			B58-0513-04	CAUTION CARD (R-V300)	Y	
-			B58-0945-03	CAUTION CARD (R-V350)	T	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❸

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
-			B58-0964-13	CAUTION CARD(UL) (R-V300)	YK	
-		✻	B58-0965-13	CAUTION CARD(PL) (R-V300/V350)	XT	
-		✻	B58-0966-13	CAUTION CARD(PL) (R-V300/V350)	MIE	
-		✻	B58-0967-03	CAUTION CARD(PL) (R-V300)	P	
-		✻	B58-1546-03	CAUTION CARD (R-V300)	C	
-			B59-1104-00	SERVICE DIRECTORY (R-V300)	Y	
-		✻	B59-1161-03	SUB-INSTRUCTION(R-V300/V350)	PT	
-		✻	B59-1161-03	SUB-INSTRUCTION MANUAL(R-V300)	IYKMCY	
-		✻	B59-1163-03	SUB-INSTRUCTION MANUAL(R-V350)	E	
-		✻	B59-1164-03	SUB-INSTRUCTION MANUAL(R-V350)	E	
-		✻	B59-1165-03	SUB-INSTRUCTION MANUAL(R-V350)	E	
-		✻	B59-1166-03	SUB-INSTRUCTION(R-V300/V350)	ME	
-		✻	B59-1167-03	SUB-INSTRUCTION MANUAL(R-V300)	C	
-		✻	B59-1168-03	SUB-INSTRUCTION MANUAL(R-V300)	MI	
-			B59-1169-03	SUB-INSTRUCTION MANUAL		
-			B60-3435-00	INST MANUAL(ENGLISH) (R-V300)		
-		✻	B60-3436-00	INST MANUAL(ENGLISH) (R-V350)	T	
-		✻	B60-3437-00	INST MANUAL(FRENCH) (R-V300)	P	
-		✻	B60-3438-00	INST MANUAL(FRENCH) (R-V350)	E	
-		✻	B60-3439-00	INST MANUAL(GERMAN) (R-V350)	E	
-		✻	B60-3440-00	INST MANUAL(DUTCH) (R-V350)	E	
-		✻	B60-3441-00	INST MANUAL(ITALIAN) (R-V350)	E	
-		✻	B60-3442-00	INST MANUAL(SPANISH) (R-V300)	M	
-		✻	B60-3443-00	INST MANUAL (R-V350)	E	
-		✻	B60-3472-00	INST MANUAL(CHINESE) (R-V300)	C	
-		✻	B60-3473-00	INST MANUAL(TAIWANESE)(R-V300)	MI	
⚠ 615	1D		E03-0115-05	AC PLUG ADAPTER (R-V300)	MI	
⚠ 616	1F		E30-2592-15	AC POWER CORD (R-V300)	MI	
⚠ 616	1F		E30-2605-05	AC POWER CORD (R-V300)	Y	
⚠ 616	1F		E30-2717-05	AC POWER CORD (R-V300)	X	
⚠ 616	1F		E30-2787-05	AC POWER CORD (R-V300)	KP	
⚠ 616	1F		E30-2788-05	AC POWER CORD (R-V350)	E	
⚠ 616	1F		E30-2791-05	AC POWER CORD (R-V350)	T	
⚠ 616	1F		E30-2870-05	AC POWER CORD (R-V300)	C	
620	1E	✻	E35-1957-05	FLAT CABLE		
626	1D		F07-1602-04	COVER		
-		✻	H10-7341-02	POLYSTYRENE FOAMED(R-V300/V350)	KPE	
-		✻	H10-7342-02	POLYSTYRENE FOAMED(R-V300/V350)	KPE	
-		✻	H10-7343-02	POLYSTYRENE FOAMED FIX(R-V350)	T	
-		✻	H10-7344-02	POLYSTYRENE FOAMED FIX(R-V350)	T	
-		✻	H10-7375-02	POLYSTYRENE FOAMED FIX(R-V300)	IYMCX	
-		✻	H10-7376-02	POLYSTYRENE FOAMED FIX(R-V300)	IYMCX	
-			H13-0281-04	CARTON BOARD (R-V300)	X	
-			H25-0232-04	PROTECTION BAG (R-V300)	IYKMCX	
-			H25-0232-04	PROTECTION BAG (R-V300/V350)	PE	
-			H25-0651-04	PROTECTION BAG (R-V350)	T	
-			H25-1516-04	PROTECTION BAG		
-			H30-0100-04	ADHESIVE DOUBLE(R-V300/V350)	EKPT	
-			H30-0602-04	ADHESIVE DOUBLE-COATED(R-V300)	IYMCX	
-		✻	H50-2465-14	ITEM CARTON CASE (R-V300)	KP	
-		✻	H50-2466-04	ITEM CARTON CASE (R-V300)	MI	
-		✻	H50-2467-14	ITEM CARTON CASE (R-V350)	T	
-		✻	H50-2571-14	ITEM CARTON CASE (R-V350)	E	

L : Scandinavia
Y : PX(Far East, Hawaii)
Y : AAFES(Europe)
K : USA
T : Europe
X : Australia
P : Canada
E : Europe
M : Other Areas
R : Mexico
G : Germany

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❹

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
-		✻	H50-2572-04	ITEM CARTON CASE (R-V300)	C	
-		✻	H50-2573-04	ITEM CARTON CASE (R-V300)	XY	
635	2F		J02-1188-03	FOOT (R-V300/V350)	EKPT	
635	2F		J02-1189-13	FOOT (R-V300)	IYMCX	
637	1F		J19-3331-05	UNIT HOLDER		
638	1F		J19-3385-05	UNIT HOLDER		
640	2F		J19-3730-04	UNIT HOLDER (R-V300/V350)	EKPT	
640	2F		J19-3753-04	UNIT HOLDER (R-V300)	IYMCX	
⚠ 646	1F		J42-0083-05	POWER CORD BUSHING		
647	1D		J19-3645-05	LOOP ANTENNA STAND		
-			J19-3329-05	UNIT HOLDER (R-V300/V350)	EKPT	
-			J61-0098-05	WIRE BAND (R-V300/V350)	EKPT	
-			J61-0307-05	WIRE BAND (R-V300)	IYMCX	
650	2D	✻	K29-6727-04	KNOB		
653	2D	✻	K29-6723-02	KNOB (R-V300)	KP	
653	2D	✻	K29-6725-02	KNOB (R-V350)		
653	2D	✻	K29-6816-02	KNOB (R-V300)	IYMCX	
654	2D	✻	K29-6724-02	KNOB (R-V300)	KP	
654	2D	✻	K29-6726-02	KNOB (R-V350)		
654	2D	✻	K29-6817-02	KNOB (R-V300)	IYMCX	
⚠ 660	1E	✻	L07-2376-05	POWER TRANSFORMER (R-V300)	KP	
⚠ 660	1E	✻	L07-2377-05	POWER TRANSFORMER (R-V300)	MIY	
⚠ 660	1E	✻	L07-2378-05	POWER TRANSFORMER (R-V300)	X	
⚠ 660	1E	✻	L07-2379-05	POWER TRANSFORMER (R-V300)	C	
⚠ 660	1E	✻	L07-2381-05	POWER TRANSFORMER (R-V350)		
665	1D		T90-0809-05	LEAD WIRE ANTENNA (R-V300)	IYMCX	
665	1D		T90-0810-05	LEAD WIRE ANTENNA(R-V300/V350)	EKPT	
666	1D		T90-0820-05	LOOP ANTENNA		
670	1D		W01-0935-05	MICROPHONE (R-V350)		

TUNER UNIT (X05-467x-xx)

C1 ,2			CK73FB1H103K	CHIP C	0.010UF K	
C5			CK73FB1H102K	CHIP C	1000PF K	
C8			CK73FB1H103K	CHIP C	0.010UF K	
C9			CE04LW1C100M	ELECTRO	10UF 16WV	
C10			CK73FB1H473K	CHIP C	0.047UF K	
C11			CE04LW1H010M	ELECTRO	1.0UF 50WV	
C12			CE04LW1H2R2M	ELECTRO	2.2UF 50WV	
C13			CK73FB1H102K	CHIP C	1000PF K	
C14			CE04LW1H010M	ELECTRO	1.0UF 50WV	
C15			CC73FCH1H220J	CHIP C	22PF J	
C16			CE04LW1C100M	ELECTRO	10UF 16WV	
C17			CK73FB1H562K	CHIP C	5600PF K	
C18			CK73FB1H102K	CHIP C	1000PF K	
C19			CE04HW1E4R7M	NP-ELEC	4.7UF 25WV	
C20			CK73FB1E104K	CHIP C	0.10UF K	
C21 ,22			CQ93FMG1H113J	MYLAR	0.011UF J	
C23			CE04LW1H010M	ELECTRO	1.0UF 50WV	
C25			CE04LW1C100M	ELECTRO	10UF 16WV	
C26			CE04LW1C470M	ELECTRO	47UF 16WV	
C27			CE04LW1H010M	ELECTRO	1.0UF 50WV	
C28			CQ93FMG1H223J	MYLAR	0.022UF J	
C29			CE04LW1H2R2M	ELECTRO	2.2UF 50WV	

L : Scandinavia
Y : PX(Far East, Hawaii)
Y : AAFES(Europe)
K : USA
T : Europe
X : Australia
P : Canada
E : Europe
M : Other Areas
R : Mexico
G : Germany

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❺

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C30			CE04LW1C101M	ELECTRO	100UF	16WV		
C31			CE04LW1A470M	ELECTRO	47UF	10WV		
C32			CK73FB1H103K	CHIP C	0.010UF	K		
C33			CC73FSL1H101J	CHIP C	100PF	J		
C34 ,35			CK73FB1H102K	CHIP C	1000PF	K		
C36			CC73FCH1H270J	CHIP C	27PF	J		
C37			CC73FCH1H220J	CHIP C	22PF	J		
C38			CK73FB1H471K	CHIP C	470PF	K		
C57 ,58			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C59 ,60			CE04LW1C100M	ELECTRO	10UF	16WV		
C61 ,62			CQ93FMG1H472J	MYLAR	4700PF	J	MCIY	
C63			CC73FCH1H220J	CHIP C	22PF	J		
C64			CC73FCH1H330J	CHIP C	33PF	J		
C65			CC73FCH1H040C	CHIP C	4.0PF	C		
C67			CK73FB1H102K	CHIP C	1000PF	K		
CN1			E40-4609-05	PIN ASSY				
J1			E70-0052-05	LOCK TERMINAL BOARD				
CF1 ,2			L72-0531-05	CERAMIC FILTER				
CF3			L72-0593-05	CERAMIC FILTER				
L1			L39-1348-05	COMBINATION COIL				
L2			L30-0911-05	AM IFT				
L3 ,4			L40-1091-17	SMALL FIXED INDUCTOR(1UH)				
X1			L77-1122-05	CRYSTAL RESONATOR(7.2MHZ)				
X2			L78-0637-05	RESONATOR	(456KHZ)			
R1			RK73FB2A332J	CHIP R	3.3K	J 1/10W		
R2			RK73FB2A681J	CHIP R	680	J 1/10W		
R3			RK73FB2A100J	CHIP R	10	J 1/10W		
R4 ,5			RK73FB2A331J	CHIP R	330	J 1/10W		
R6			RK73FB2A101J	CHIP R	100	J 1/10W		
R7			RK73FB2A473J	CHIP R	47K	J 1/10W		
R8			RK73FB2A331J	CHIP R	330	J 1/10W		
R12			RK73FB2A102J	CHIP R	1.0K	J 1/10W		
R13			RK73FB2A473J	CHIP R	47K	J 1/10W		
R15 ,16			RK73FB2A393J	CHIP R	39K	J 1/10W		
R17			RK73FB2A271J	CHIP R	270	J 1/10W		
R18			RK73FB2A302J	CHIP R	3.0K	J 1/10W		
R19			RK73FB2A822J	CHIP R	8.2K	J 1/10W		
R20 -23			RK73FB2A102J	CHIP R	1.0K	J 1/10W		
R24			RK73FB2A562J	CHIP R	5.6K	J 1/10W		
R25			RD14NB2E101J	RD	100	J 1/4W		
R26			RD14NB2E561J	RD	560	J 1/4W		
R27 ,28			RK73FB2A103J	CHIP R	10K	J 1/10W		
R29 ,30			RK73FB2A102J	CHIP R	1.0K	J 1/10W		
R31			RK73FB2A103J	CHIP R	10K	J 1/10W		
R32			RK73FB2A122J	CHIP R	1.2K	J 1/10W		
R33			RK73FB2A123J	CHIP R	12K	J 1/10W		
R41			RS14KB3A271J	FL-PROOF RS	270	J 1W		
R42			RD14NB2E271J	RD	270	J 1/4W		
R44			RK73FB2A101J	CHIP R	100	J 1/10W		
R46			RK73FB2A104J	CHIP R	100K	J 1/10W		
R47			RK73FB2A153J	CHIP R	15K	J 1/10W		
R48			RK73FB2A473J	CHIP R	47K	J 1/10W		
R49			RK73FB2A473J	CHIP R	47K	J 1/10W	MCIY	
R50			RK73FB2A471J	CHIP R	470	J 1/10W	MCIY	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❻

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
R51 -54			RK73FB2A473J	CHIP R	47K	J 1/10W		
R55 ,56			RK73FB2A154J	CHIP R	150K	J 1/10W		
R59 ,60			RK73FB2A332J	CHIP R	3.3K	J 1/10W		
R61			RK73FB2A103J	CHIP R	10K	J 1/10W		
R62			RK73FB2A563J	CHIP R	56K	J 1/10W		
R63			RK73FB2A821J	CHIP R	820	J 1/10W		
R64			RK73FB2A102J	CHIP R	1.0K	J 1/10W		
R65			RK73EB2B102J	CHIP R	1.0K	J 1/8W		
R73			RK73FB2A681J	CHIP R	680	J 1/10W		
W101-106			R92-0670-05	CHIP R	0 OHM			
W108-113			R92-0670-05	CHIP R	0 OHM			
W115			R92-0670-05	CHIP R	0 OHM			
W201-212			R92-0679-05	CHIP R	0 OHM			
S1			S62-0034-05	SLIDE SWITCH			MCIY	
D1 ,2			HSS104	DIODE				
D1 ,2			1SS133	DIODE				
D3 ,4			MTZJ5.1(B)	ZENER DIODE				
D3 ,4			UZ-5.1BSB	ZENER DIODE				
D8			HSS104	DIODE				
D8			1SS133	DIODE				
D10			MA111	DIODE				
D12			MTZJ3.3(B)	ZENER DIODE				
D12			UZ-3.3BSB	ZENER DIODE				
D13			MTZJ2.7(B)	ZENER DIODE				
D13			UZ-2.7BSB	ZENER DIODE				
IC1			LA1832	ANALOGUE IC				
IC2			LC72131	MOS-IC				
IC4			NJM4565M	IC(OP AMP X2)				
Q1			2SC2714(R,O)	TRANSISTOR				
Q3			2SA1576A(R,S)	TRANSISTOR				
Q3			2SB1218A(Q,R)	TRANSISTOR				
Q5			2SC4081(R,S)	TRANSISTOR				
Q5			2SD1819A(Q,R)	TRANSISTOR				
Q6			2SA1576A(R,S)	TRANSISTOR				
Q6			2SB1218A(Q,R)	TRANSISTOR				
Q7 ,8			2SD2114K	TRANSISTOR				
Q9 ,10			2SC4081(R,S)	TRANSISTOR			MCIY	
Q9 ,10			2SD1819A(Q,R)	TRANSISTOR			MCIY	
A1			W02-2582-05	FM FRONT-END ASSY				
TUNER UNIT (X05-468x-xx)								
C1			CE04LW1C470M	ELECTRO	47UF	16WV		
C2			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C3			CK73FB1H103K	CHIP C	0.010UF	K		
C5			CK73FB1H103K	CHIP C	0.010UF	K	TE	
C6 -10			CK73FB1H103K	CHIP C	0.010UF	K		
C30			CK73EB1E473K	CHIP C	0.047UF	K		
C31			CE04LW1C470M	ELECTRO	47UF	16WV		
C32			CK73FB1H103K	CHIP C	0.010UF	K		
C33			CE04LW1C100M	ELECTRO	10UF	16WV		
C34			CK73FB1H103K	CHIP C	0.010UF	K		
C35			CE04LW1C100M	ELECTRO	10UF	16WV		
C36			CK73FB1E473K	CHIP C	0.047UF	K		
C37			CK73FB1H103K	CHIP C	0.010UF	K		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❼

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C38			C90-3217-05	ELECTRO	10UF	10WV		
C40			C90-3253-05	ELECTRO	1.0UF	50WV		
C41			C90-3251-05	ELECTRO	0.47UF	50WV		
C42			C90-3240-05	ELECTRO	2.2UF	35WV		
C43			CE04LW1HR47M	ELECTRO	0.47UF	50WV		
C44			CK73FB1E473K	CHIP C	0.047UF	K		
C45			CC73FCH1H220J	CHIP C	22PF	J		
C46			CE04LW1A101M	ELECTRO	100UF	10WV		
C47			CK73FB1H472K	CHIP C	4700PF	K		
C48			CC73FSL1H101J	CHIP C	100PF	J		
C49			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C50			CK73FB1H152K	CHIP C	1500PF	K	TE	
C51 ,52			C90-3217-05	ELECTRO	10UF	10WV		
C53 ,54			CK73FB1H273K	CHIP C	0.027UF	K	TE	
C53 ,54			CK73FB1H333K	CHIP C	0.033UF	K	KP	
C55 ,56			CE04LW1H2R2M	ELECTRO	2.2UF	50WV		
C57 ,58			CK73FB1H822K	CHIP C	8200PF	K		
C59			CC73FSL1H101J	CHIP C	100PF	J	TE	
C60			CK73FB1E104K	CHIP C	0.10UF	K	TE	
C61			CK73FB1H103K	CHIP C	0.010UF	K		
C62			CK73FB1H333K	CHIP C	0.033UF	K	T	
C63			CC73FCH1H090D	CHIP C	9.0PF	D	T	
C64			CK73FB1H333K	CHIP C	0.033UF	K		
C66			CC73FCH1H060D	CHIP C	6.0PF	D		
C67			CC73FCH1H220J	CHIP C	22PF	J		
C68			CC73FSL1H020C	CHIP C	2.0PF	C		
C70			CC73FSL1H101J	CHIP C	100PF	J		
C73			CK73FB1H821K	CHIP C	820PF	K	KP	
C81			CC73FCH1H220J	CHIP C	22PF	J		
C82			CC73FCH1H270J	CHIP C	27PF	J		
C84			CK73FB1H102K	CHIP C	1000PF	K		
C85			CC73FSL1H101J	CHIP C	100PF	J		
C86			CK73FB1H102K	CHIP C	1000PF	K		
C87			CE04LW1C100M	ELECTRO	10UF	16WV		
C89			CE04LW1C470M	ELECTRO	47UF	16WV		
C90			CE04LW1H2R2M	ELECTRO	2.2UF	50WV		
C91			CK73FB1H223K	CHIP C	0.022UF	K		
C92			CC73FSL1H471J	CHIP C	470PF	J		
C93			CK73FB1H103K	CHIP C	0.010UF	K		
C96			CK73FB1H102K	CHIP C	1000PF	K		
CN1			E40-4609-05	PIN ASSY				
CN2			E40-4871-05	PIN ASSY				
J1			E70-0052-05	LOCK TERMINAL BOARD				
CF1 ,2			L72-0536-05	CERAMIC FILTER			TE	
CF1 ,2			L72-0596-05	CERAMIC FILTER			KP	
L31		✻	L30-0943-05	FM IFT				
L32		✻	L30-0944-05	FM IFT				
L33			L30-0911-05	AM IFT				
L34			L79-1240-05	LC FILTER			TE	
L35 ,36			L79-1239-05	LC FILTER				
L61			L40-1091-17	SMALL FIXED INDUCTOR(1UH)				
L62			L39-1351-05	COMBINATION COIL			KPE	
L62			L39-1352-05	COMBINATION COIL			T	
L63			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)				

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❽

Ref. No	Address	New Parts	Parts No.	Description				Destination	Remarks
L81			L40-1091-17	SMALL FIXED INDUCTOR(1UH)					
X31			L78-0637-05	RESONATOR	(456KHZ)				
X81			L77-2159-05	CRYSTAL RESONATOR(7.2MHZ)					
R1			RD14NB2E221J	RD	220	J	1/4W		
R2			RK73FB2A221J	CHIP R	220	J	1/10W		
R3			RK73FB2A182J	CHIP R	1.8K	J	1/10W	TE	
R3			RK73FB2A561J	CHIP R	560	J	1/10W	KP	
R4			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R5			RK73FB2A103J	CHIP R	10K	J	1/10W		
R7			RK73FB2A221J	CHIP R	220	J	1/10W	TE	
R8			RK73FB2A681J	CHIP R	680	J	1/10W	TE	
R9			RK73FB2A470J	CHIP R	47	J	1/10W		
R10			RK73FB2A101J	CHIP R	100	J	1/10W		
R11			RK73FB2A331J	CHIP R	330	J	1/10W		
R12			RK73FB2A101J	CHIP R	100	J	1/10W		
R13			RK73FB2A681J	CHIP R	680	J	1/10W		
R14			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R15			RK73FB2A331J	CHIP R	330	J	1/10W		
R16			RK73FB2A100J	CHIP R	10	J	1/10W	TE	
R16			RK73FB2A150J	CHIP R	15	J	1/10W	KP	
R17			RK73FB2A331J	CHIP R	330	J	1/10W		
R18			RK73FB2A391J	CHIP R	390	J	1/10W		
R19			RK73FB2A681J	CHIP R	680	J	1/10W		
R20			RK73FB2A100J	CHIP R	10	J	1/10W	TE	
R20			RK73FB2A150J	CHIP R	15	J	1/10W	KP	
R21			RK73FB2A101J	CHIP R	100	J	1/10W		
R22			RK73FB2A100J	CHIP R	10	J	1/10W		
R31			RS14KB3A151JFR	FL-PROOF RS	150	J	1W		
R32			RK73EB2B562J	CHIP R	5.6K	J	1/8W		
R33			RK73FB2A302J	CHIP R	3.0K	J	1/10W		
R34			RK73FB2A822J	CHIP R	8.2K	J	1/10W		
R35			RK73FB2A333J	CHIP R	33K	J	1/10W		
R36			RK73FB2A393J	CHIP R	39K	J	1/10W		
R37			RK73FB2A242J	CHIP R	2.4K	J	1/10W		
R38			RK73FB2A333J	CHIP R	33K	J	1/10W		
R39			RK73FB2A823J	CHIP R	82K	J	1/10W		
R40			RK73FB2A202J	CHIP R	2.0K	J	1/10W		
R41			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R42			RK73FB2A202J	CHIP R	2.0K	J	1/10W	TE	
R43 ,44			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R45 ,46			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
R47 ,48			RK73FB2A392J	CHIP R	3.9K	J	1/10W		
R49			RK73FB2A473J	CHIP R	47K	J	1/10W		
R51			RK73FB2A392J	CHIP R	3.9K	J	1/10W	TE	
R52			RK73FB2A104J	CHIP R	100K	J	1/10W	TE	
R53			RK73FB2A102J	CHIP R	1.0K	J	1/10W	TE	
R55			RK73FB2A562J	CHIP R	5.6K	J	1/10W		
R56 ,57			RK73FB2A101J	CHIP R	100	J	1/10W	TE	
R59			RK73FB2A272J	CHIP R	2.7K	J	1/10W		
R61			RK73FB2A223J	CHIP R	22K	J	1/10W	T	
R62			RK73FB2A105J	CHIP R	1.0M	J	1/10W	T	
R63			RK73FB2A473J	CHIP R	47K	J	1/10W	T	
R64			RK73FB2A103J	CHIP R	10K	J	1/10W	T	
R65			RK73FB2A153J	CHIP R	15K	J	1/10W	T	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

9

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
R66			RK73FB2A152J	CHIP R 1.5K J 1/10W	T	
R67			RK73FB2A104J	CHIP R 100K J 1/10W		
R68			RK73FB2A222J	CHIP R 2.2K J 1/10W	T	
R69			RK73FB2A103J	CHIP R 10K J 1/10W		
R70			RK73FB2A105J	CHIP R 1.0M J 1/10W	T	
R80			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R81 -83			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R84			RK73FB2A103J	CHIP R 10K J 1/10W		
R85 -88			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R89			RD14NB2E101J	RD 100 J 1/4W		
R90			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R91			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R92			RK73FB2A123J	CHIP R 12K J 1/10W		
R93			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R94			RD14NB2E561J	RD 560 J 1/4W		
R101,102			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R103			RK73FB2A821J	CHIP R 820 J 1/10W		
R104			RK73FB2A473J	CHIP R 47K J 1/10W		
R105			RK73FB2A822J	CHIP R 8.2K J 1/10W		
W51 ,52			R92-0670-05	CHIP R 0 OHM	KPE	
W53			R92-0670-05	CHIP R 0 OHM		
W54 ,55			R92-0670-05	CHIP R 0 OHM	KPE	
W56			R92-0679-05	CHIP R 0 OHM	T	
W57 ,58			R92-0679-05	CHIP R 0 OHM		
W59			R92-0670-05	CHIP R 0 OHM		
W61			R92-0670-05	CHIP R 0 OHM		
W62 -64			R92-0679-05	CHIP R 0 OHM		
W66 ,67			R92-0679-05	CHIP R 0 OHM		
W71			R92-0670-05	CHIP R 0 OHM		
W75			R92-0670-05	CHIP R 0 OHM		
W76			R92-0670-05	CHIP R 0 OHM	T	
W81			R92-0679-05	CHIP R 0 OHM		
W83			R92-0679-05	CHIP R 0 OHM		
W85			R92-0670-05	CHIP R 0 OHM	TE	
D1			HSS104	DIODE		
D1			1SS133	DIODE		
D2			HSS104	DIODE	TE	
D2			1SS133	DIODE	TE	
D31			HZS8.2N(B2)	ZENER DIODE		
D31			RD8.2ES(B2)	ZENER DIODE		
D32			HSS104	DIODE		
D32			1SS133	DIODE		
D61 ,62			HSS104	DIODE		
D61 ,62			1SS133	DIODE		
D81			HZS5.1N(B2)	ZENER DIODE		
D81			RD5.1ES(B2)	ZENER DIODE		
D101			HZS3.3N(B2)	ZENER DIODE		
D101			RD3.3ES(B2)	ZENER DIODE		
D102			HZS2.7N(B2)	ZENER DIODE		
D102			RD2.7ES(B2)	ZENER DIODE		
IC1			LA1836	ANALOGUE IC		
IC2			LC72131	MOS-IC		
Q1 ,2			2SC4081(R,S)	TRANSISTOR		
Q1 ,2			2SC4116(Y,GR)	TRANSISTOR		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

10

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
Q3			2SA1576A(R,S)	TRANSISTOR		
Q3			2SA1586(Y,GR)	TRANSISTOR		
Q4			2SC4081(R,S)	TRANSISTOR		
Q4			2SC4116(Y,GR)	TRANSISTOR		
Q31 ,32			2SC4081(R,S)	TRANSISTOR		
Q31 ,32			2SC4116(Y,GR)	TRANSISTOR		
Q33 ,34			2SC4081(R,S)	TRANSISTOR	TE	
Q33 ,34			2SC4116(Y,GR)	TRANSISTOR	TE	
Q61 ,62			2SC4081(R,S)	TRANSISTOR	T	
Q61 ,62			2SC4116(Y,GR)	TRANSISTOR	T	
Q63			2SC2878(B)	TRANSISTOR	T	
Q64			2SA1576A(R,S)	TRANSISTOR	T	
Q64			2SA1586(Y,GR)	TRANSISTOR	T	
Q65			2SK302(Y,GR)	FET	T	
Q81			2SA1576A(R,S)	TRANSISTOR		
Q81			2SA1586(Y,GR)	TRANSISTOR		
Q101,102			2SD1757K	TRANSISTOR		
Q103			2SA1576A(R,S)	TRANSISTOR		
Q103			2SA1586(Y,GR)	TRANSISTOR		
A1			W02-2582-05	FM FRONT-END ASSY	KP	
A1		✻	W02-2584-05	FM FRONT-END ASSY	TE	

AUDIO UNIT (X09-476x-xx/X09-479x-xx : R-V300/V350)

	Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
⚠	C1			C91-1488-05	MF	6800PF	250VAC		
	C3 ,4			CK45FF1H103Z	CERAMIC	0.010UF	Z		
	C5			CE04DW1E331M	ELECTRO	330UF	25WV		
	C6			CK45FB1H102K	CERAMIC	1000PF	K		
	C7			CE04KW1A470M	ELECTRO	47UF	10WV		
	C8			CK45FF1H103Z	CERAMIC	0.010UF	Z		
	C9			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
	C10 ,11			CK45FE2H103P	CERAMIC	0.010UF	P		
	C12 ,13			CF92FV1H104J	MF-C	0.10UF	J	KPTE	
	C14 ,15			CE04KW1H101M	ELECTRO	100UF	50WV		
	C17 ,18			C90-3580-05	ELECTRO	4700UF	63WV		
	C20			CE04KW1H470M	ELECTRO	47UF	50WV		
	C22			CE04KW1H100M	ELECTRO	10UF	50WV		
	C23 ,24			CK45FF1H103Z	CERAMIC	0.010UF	Z		
	C25			CE04KW1V102M	ELECTRO	1000UF	35WV		
	C26			CE04KW1V471M	ELECTRO	470UF	35WV		
	C27 ,28			CE04KW1V470M	ELECTRO	47UF	35WV		
	C29			CK45FB1H102K	CERAMIC	1000PF	K		
	C31 ,32			CF92FV1H104J	MF-C	0.10UF	J		
	C33			CE04KW1E470M	ELECTRO	47UF	25WV		
	C35			CK45FB1H102K	CERAMIC	1000PF	K		
	C36			CE04KW1E470M	ELECTRO	47UF	25WV		
	C39			CE04KW1E470M	ELECTRO	47UF	25WV		
	C40			CE04KW1C100M	ELECTRO	10UF	16WV		
	C41			CE04KW1A221M	ELECTRO	220UF	10WV		
	C45			CE04KW1C470M	ELECTRO	47UF	16WV		
	C46			CC45FSL1H101J	CERAMIC	100PF	J		
	C47			CE04KW1C470M	ELECTRO	47UF	16WV		
	C48			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
	C49			CE04KW1A221M	ELECTRO	220UF	10WV		
	C51 ,52			CC45FSL1H470J	CERAMIC	47PF	J		
	C53 ,54			CE04KW1C100M	ELECTRO	10UF	16WV		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑪

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C55 ,56			CC45FSL1H470J	CERAMIC	47PF	J		
C59 ,60			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C77 ,78			CK45FF1H472Z	CERAMIC	4700PF	Z	TE	
C79 ,80			CK45FF1H103Z	CERAMIC	0.010UF	Z	TE	
C81			CQ93FMG1H223J	MYLAR	0.022UF	J		
C82			CQ93FMG1H473J	MYLAR	0.047UF	J		
C83			CE04KW1A221M	ELECTRO	220UF	10WV		
C84 -87			CE04KW1C100M	ELECTRO	10UF	16WV		
C88			CE04KW1A221M	ELECTRO	220UF	10WV		
C89 ,90			CF92FV1H104J	MF-C	0.10UF	J		
C91			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C92			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C93			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C94			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C95			CF92FV1H154J	MF-C	0.15UF	J		
C96			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C97 ,98			CF92FV1H154J	MF-C	0.15UF	J		
C99			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C100			CF92FV1H154J	MF-C	0.15UF	J		
C101			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C102			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C103			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C104			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C105,106			CF92FV1H104J	MF-C	0.10UF	J		
C107			CE04KW1C470M	ELECTRO	47UF	16WV		
C108			CF92FV1H474J	MF-C	0.47UF	J		
C110			CQ93FMG1H681J	MYLAR	680PF	J		
C111,112			CK45FB1H102K	CERAMIC	1000PF	K		
C113			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C116			CE04KW1C100M	ELECTRO	10UF	16WV		
C117			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C118			CF92FV1H474J	MF-C	0.47UF	J		
C119,120			CE04KW1C100M	ELECTRO	10UF	16WV		
C121			CE04HW1E220M	NP-ELEC	22UF	25WV		
C122			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C124			CQ93FMG1H222J	MYLAR	2200PF	J		
C130			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C131			CE04KW1HR33M	ELECTRO	0.33UF	50WV		
C133			CE04KW1A221M	ELECTRO	220UF	10WV		
C134			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C135			CQ93FMG1H823J	MYLAR	0.082UF	J		
C136			CQ93FMG1H332J	MYLAR	3300PF	J		
C137			CQ93FMG1H823J	MYLAR	0.082UF	J		
C138			CE04KW1A221M	ELECTRO	220UF	10WV		
C141,142			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C143			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C144			CF92FV1H104J	MF-C	0.10UF	J		
C145,146			CC45FSL1H101J	CERAMIC	100PF	J		
C147,148			CQ93FMG1H562J	MYLAR	5600PF	J		
C149-152			CF92FV1H104J	MF-C	0.10UF	J		
C153,154			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C155,156			CE04KW1C100M	ELECTRO	10UF	16WV		
C157,158			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C159,160			CC45FSL1H101J	CERAMIC	100PF	J		
C161,162			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑫

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C163			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C165			CE04KW1C470M	ELECTRO	47UF	16WV		
C167			CE04KW1C470M	ELECTRO	47UF	16WV		
C171,172			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C173,174			CC45FSL1H101J	CERAMIC	100PF	J		
C201,202			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C203,204			CQ93FMG1H391K	MYLAR	390PF	K		
C205,206			CE04KW1A101M	ELECTRO	100UF	10WV		
C207,208			C90-3323-05	ALUMINUM ELECTROLYTIC C.				
C211,212			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C213,214			CF92FV1H104J	MF-C	0.10UF	J		
C251,252			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C253,254			CQ93FMG1H391K	MYLAR	390PF	K		
C255,256			CE04KW1A101M	ELECTRO	100UF	10WV		
C257,258			CE04KW1H101M	ELECTRO	100UF	50WV		
C259			CK45FB1H222K	CERAMIC	2200PF	K		
C261,262			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C263,264			CF92FV1H104J	MF-C	0.10UF	J		
C301-304			CC45FSL1H221J	CERAMIC	220PF	J	TE	
C305,306			CC45FSL1H221JM	CERAMIC	220PF	J		
C307,308			CC45FSL1H221J	CERAMIC	220PF	J	TE	
C309,310			CC45FSL1H221JM	CERAMIC	220PF	J		
C311,312			CC45FSL1H221J	CERAMIC	220PF	J	TE	
C313,314			CC45FSL1H221JM	CERAMIC	220PF	J		
C315,316			CC45FSL1H221J	CERAMIC	220PF	J	TE	
C317,318			CC45FSL1H221J	CERAMIC	220PF	J	KP	
C321,322			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C323			CK45FB1H102K	CERAMIC	1000PF	K		
C325,326			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C327			CK45FB1H102K	CERAMIC	1000PF	K		
C331,332			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C333,334			CC45FSL1H221J	CERAMIC	220PF	J		
C335,336			CE04KW1C220M	ELECTRO	22UF	16WV		
C339			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C340			CK45FB1H391K	CERAMIC	390PF	K		
CN1			E40-4245-05	PIN ASSY			MIYCX	
CN1			E40-8126-05	PIN ASSY			KPTE	
CN13			E40-4294-05	FLAT CABLE CONNECTOR				
CN15			E40-4922-05	FLAT CABLE CONNECTOR				
CN301			E40-4608-05	PIN ASSY				
⚠ J1			E03-0148-05	AC OUTLET			KP	
⚠ J1			E03-0149-05	AC OUTLET			EMI	
⚠ J1			E03-0310-05	AC OUTLET			T	
⚠ J1			E03-0325-05	AC OUTLET			X	
⚠ J1			E03-0330-05	AC OUTLET			C	
J2			E70-0053-05	LOCK TERMINAL BOARD				
J3			E70-0046-05	LOCK TERMINAL BOARD				
J5			E63-0138-15	PHONO JACK				
J301-303			E63-0139-15	PHONO JACK				
⚠ F1			F06-2021-05	FUSE (SEMKO)	(250V T2AL)		TEMIYC	
⚠ F1			F06-2021-05	FUSE (SEMKO)	(250V T2AL)		X	
⚠ F1			F50-0074-05	FUSE(5X20)			KP	
⚠ F2			F06-2021-05	FUSE (SEMKO)	(250V T2AL)		MIY	
⚠ F3			F05-2525-05	FUSE (SEMKO)	(250V T2.5AL)		E	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⓭

	Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
⚠	F4 -6			F06-1022-05	FUSE (SEMKO)	(250V T1AL)		TEMIYC	
⚠	F4 -6			F06-1022-05	FUSE (SEMKO)	(250V T1AL)		X	
⚠	F4 ,5			F50-0066-05	FUSE(5X20)			KP	
⚠	F6			F50-0067-05	FUSE(5X20)			KP	
	CN3 ,4			J13-0075-05	FUSE CLIP				
	CN5 ,6			J13-0075-05	FUSE CLIP			MIY	
	CN7 ,8			J13-0075-05	FUSE CLIP			E	
	CN9 -12			J13-0075-05	FUSE CLIP				
	CN17,18			J13-0075-05	FUSE CLIP				
	E11 ,12			J11-0809-05	WIRE CLAMPER				
	E14			J11-0809-05	WIRE CLAMPER				
	X1			L78-0290-05	RESONATOR	(8MHZ)			
	CP1			R90-0815-05	MULTI-COMP	10K X7			
	CP2 -5			R90-0186-05	MULTI-COMP	0.47X2	K 5W	TE	
⚠	R1			R92-1844-05	CARBON	3.3M	J 1/2W	KP	
	R6			RS14KB3A561J	FL-PROOF RS	560	J 1W	TE	
	R7			RS14KB3D561J	FL-PROOF RS	560	J 2W	TE	
	R8 ,9			RS14KB3A330J	FL-PROOF RS	33	J 1W		
	R12			RD14NB2E1R0J	RD	1	J 1/4W		
	R19			RD14NB2E221J	RD	220	J 1/4W		
	R22			RS14KB3A391J	FL-PROOF RS	390	J 1W		
	R23 ,24			RS14KB3A331J	FL-PROOF RS	330	J 1W		
	R28 -30			RS14KB3D391J	FL-PROOF RS	390	J 2W		
	R37			RS14KB3A390J	FL-PROOF RS	39	J 1W		
	R39			RD14NB2E2R2J	RD	2.2	J 1/4W		
	R40			RD14NB2E470J	RD	47	J 1/4W		
	R140			RS14KB3D472J	FL-PROOF RS	4.7K	J 2W		
	R211,212			RD14NB2E470J	RD	47	J 1/4W		
	R213,214		✻	R92-1862-05	METAL PLATE RESISTOR				
	R215,216			RD14NB2E332J	RD	3.3K	J 1/4W		
	R225,226			RS14KB3D4R7J	FL-PROOF RS	4.7	J 2W		
	R261,262			RD14NB2E470J	RD	47	J 1/4W		
	R263,264		✻	R92-1862-05	METAL PLATE RESISTOR				
	R265,266			RD14NB2E332J	RD	3.3K	J 1/4W		
	R275,276			RS14KB3D4R7J	FL-PROOF RS	4.7	J 2W		
	K1		✻	S76-0072-05	MAGNETIC RELAY				
	K2		✻	S76-0069-05	MAGNETIC RELAY				
	K3 -5			S76-0056-05	MAGNETIC RELAY				
	K6		✻	S76-0072-05	MAGNETIC RELAY				
	D2			S5688B	DIODE				
	D2			1SR139-400	DIODE				
	D4 ,5			S5688B	DIODE				
	D4 ,5			1SR139-400	DIODE				
	D6			MTZJ6.8(B)	ZENER DIODE				
	D6			UZ-6.8BSB	ZENER DIODE				
	D8			HSS104A	DIODE				
	D8			1SS131	DIODE				
	D9			MTZJ2.7(B)	ZENER DIODE				
	D9			UZ-2.7BSB	ZENER DIODE				
	D10			HSS104A	DIODE				
	D10			1SS131	DIODE				
	D11 ,12			D5SBA20F03	DIODE				
	D11 ,12			RBV-602LFA	DIODE				

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⓮

	Ref. No	Address	New Parts	Parts No.	Description		Destination	Remarks
	D13			MTZJ5.1(B)	ZENER DIODE			
	D13			UZ-5.1BSB	ZENER DIODE			
	D15			HSS104A	DIODE			
	D15			1SS131	DIODE			
	D16			MTZJ16(B)	ZENER DIODE			
	D16			UZ-16BSB	ZENER DIODE			
	D17			MTZJ3.9(B)	ZENER DIODE			
	D17			UZ-3.9BSB	ZENER DIODE			
	D18			MTZJ18(B)	ZENER DIODE			
	D18			UZ-18BSB	ZENER DIODE			
	D19 -22			S5688B	DIODE			
	D19 -22			1SR139-400	DIODE			
	D23			MTZJ5.6(B)	ZENER DIODE			
	D23			UZ-5.6BSB	ZENER DIODE			
	D25			MTZJ5.6(B)	ZENER DIODE			
	D25			UZ-5.6BSB	ZENER DIODE			
	D26 ,27			MTZJ5.1(B)	ZENER DIODE			
	D26 ,27			UZ-5.1BSB	ZENER DIODE			
	D29			MTZJ10(B)	ZENER DIODE			
	D29			UZ-10BSB	ZENER DIODE			
	D30 -35			HSS104A	DIODE			
	D30 -35			1SS131	DIODE			
	D37 ,38			HSS104A	DIODE			
	D37 ,38			1SS131	DIODE			
	D40			HSS104A	DIODE			
	D40			1SS131	DIODE			
	D41 ,42			MTZJ8.2(B)	ZENER DIODE			
	D41 ,42			UZ-8.2BSB	ZENER DIODE			
	D43			MTZJ10(B)	ZENER DIODE			
	D43			UZ-10BSB	ZENER DIODE			
	D45 ,46			HSS104A	DIODE			
	D45 ,46			1SS131	DIODE			
	D47			HSS104A	DIODE		KPTE	
	D47			1SS131	DIODE		KPTE	
	IC1			NJM2279D	IC(VIDEO IC)			
	IC2			LA2786	ANALOGUE IC			
	IC3			LV1016	DI BI-POLAR IC			
	IC4			TDA7466	ANALOGUE IC			
	IC5			TDA7309	ANALOGUE IC			
	IC6 ,7		✻	STK499-080	HYBRID IC			
	IC301			NJU7312AL	ANALOGUE IC			
	IC302			NJU7311AL	ANALOGUE IC			
	IC303			NJM4565L-D	ANALOGUE IC			
	Q1			2SD2525	TRANSISTOR			
	Q3			2SC1845(F,E)	TRANSISTOR			
⚠	Q12			2SA1534A(R,S)	TRANSISTOR			
	Q13			2SD2012	TRANSISTOR	(R-V300)	MI	
	Q13			2SD2061	TRANSISTOR	(R-V300)	MI	
	Q13			2SD2525	TRANSISTOR		KPTECX	
	Q13			2SD2525	TRANSISTOR		Y	
⚠	Q14			2SB1640	TRANSISTOR			
⚠	Q15			2SC1740S(Q,R)	TRANSISTOR		MICXY	
⚠	Q15			2SC2458(Y,GR)	TRANSISTOR		KPTE	
⚠	Q15			2SC2785(F,E)	TRANSISTOR		MICXY	
⚠	Q15			2SC3311A(Q,R)	TRANSISTOR		KPTE	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑮

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
Q16			2SA1048(Y,GR)	TRANSISTOR	KPTE	
Q16			2SA1175(F,E)	TRANSISTOR	MICXY	
Q16			2SA1309A(Q,R)	TRANSISTOR	KPTE	
Q16			2SA933AS(Q,R)	TRANSISTOR	MICXY	
Q17 ,18			2SC1740S(Q,R)	TRANSISTOR	MICXY	
Q17 ,18			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q17 ,18			2SC2785(F,E)	TRANSISTOR	MICXY	
Q17 ,18			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q19 ,20			2SC3940A(R,S)	TRANSISTOR		
Q21 -24			2SC2878(B)	TRANSISTOR		
Q25			2SA992(F,E)	TRANSISTOR		
Q26 ,27			2SC1845(F,E)	TRANSISTOR		
Q29 ,30			2SA1048(Y,GR)	TRANSISTOR	KPTE	
Q29 ,30			2SA1175(F,E)	TRANSISTOR	MICXY	
Q29 ,30			2SA1309A(Q,R)	TRANSISTOR	KPTE	
Q29 ,30			2SA933AS(Q,R)	TRANSISTOR	MICXY	
Q31 ,32			2SC1740S(Q,R)	TRANSISTOR	MICXY	
Q31 ,32			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q31 ,32			2SC2785(F,E)	TRANSISTOR	MICXY	
Q31 ,32			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q35 ,36			2SC1740S(Q,R)	TRANSISTOR	MICXY	
Q35 ,36			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q35 ,36			2SC2785(F,E)	TRANSISTOR	MICXY	
Q35 ,36			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q37			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q37			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q45			2SC1740S(Q,R)	TRANSISTOR	MICXY	
Q45			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q45			2SC2785(F,E)	TRANSISTOR	MICXY	
Q45			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q201,202			2SC2878(B)	TRANSISTOR		
Q203,204			2SC1845(F,E)	TRANSISTOR		
Q251,252			2SC2878(B)	TRANSISTOR		
Q253,254			2SC1845(F,E)	TRANSISTOR		
AUDIO UNIT (X09-473x-xx : R-A150 / X09-478x-xx : R-A100)						
C1			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C2			CE04DW1E331M	ELECTRO 330UF 25WV		
C3			CE04KW1V100M	ELECTRO 10UF 35WV		
C4			CE04KW1A470M	ELECTRO 47UF 10WV		
C5			CK45FF1H103Z	CERAMIC 0.010UF Z		
C6 ,7			CE04KW1H101M	ELECTRO 100UF 50WV		
C9			CE04KW1H101M	ELECTRO 100UF 50WV		
C10			CE04KW1H100M	ELECTRO 10UF 50WV		
C11			CE04KW1H470M	ELECTRO 47UF 50WV		
C13			CE04KW1V102M	ELECTRO 1000UF 35WV		
C14			CE04KW1V470M	ELECTRO 47UF 35WV		
C15 ,16			CK45FB1H102K	CERAMIC 1000PF K		
C17			CE04KW1C100M	ELECTRO 10UF 16WV		
C18			CE04KW1C470M	ELECTRO 47UF 16WV		
C19			CE04KW1V471M	ELECTRO 470UF 35WV		
C20			CE04KW1V100M	ELECTRO 10UF 35WV		
C21			CE04KW1C470M	ELECTRO 47UF 16WV		
C23 ,24			CC45FSL1H101J	CERAMIC 100PF J		
C25			CK45FB1H102K	CERAMIC 1000PF K		
C28			CE04KW1C101M	ELECTRO 100UF 16WV		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑯

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
C29			CE04KW1C100M	ELECTRO 10UF 16WV		
C31			CE04HW1A330M	NP-ELEC 33UF 10WV		
C32			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C33 ,34			CK45FB1H471K	CERAMIC 470PF K		
C37 ,38			C90-3492-05	ELECTRO 3300UF 56WV		
C39			CE04KW1H470M	ELECTRO 47UF 50WV		
C40			CE04KW1H101M	ELECTRO 100UF 50WV		
C41 ,42			CC45FSL1H020C	CERAMIC 2.0PF C		
C51 -68			CC45FSL1H221J	CERAMIC 220PF J		
C70			CK45FB1H471K	CERAMIC 470PF K		
C71			CK45FF1H103Z	CERAMIC 0.010UF Z		
C72			CC45FSL1H101J	CERAMIC 100PF J		
C73 ,74			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C75 ,76			CC45FSL1H221J	CERAMIC 220PF J		
C77 ,78			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C79			CK45FF1H103Z	CERAMIC 0.010UF Z		
C80			CC45FSL1H101J	CERAMIC 100PF J		
C83 ,84			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C85 -88			CE04KW1H0R1M	ELECTRO 0.1UF 50WV		
C89			CE04KW1C470M	ELECTRO 47UF 16WV		
C90			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C91 ,92			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C93 ,94			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C95 ,96			CQ93FMG1H562J	MYLAR 5600PF J		
C97			CQ93FMG1H472J	MYLAR 4700PF J		
C98 ,99			CE04KW1HR47M	ELECTRO 0.47UF 50WV		
C100			CK45FB1H471K	CERAMIC 470PF K		
C111,112			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C113,114			CK45FB1H471K	CERAMIC 470PF K		
C115,116			CE04KW1A101M	ELECTRO 100UF 10WV		
C119,120			CC45FSL2H470J	CERAMIC 47PF J		
C121,122			CF92FV1H104J	MF-C 0.10UF J		
C123-126			CK45FF1H103Z	CERAMIC 0.010UF Z		
C127,128			CF92FV1H224J	MF-C 0.22UF J		
C129,130			CK45FF1H103Z	CERAMIC 0.010UF Z		
C131,132			CF92FV1H224J	MF-C 0.22UF J		
C141			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C142			CE04KW1A221M	ELECTRO 220UF 10WV		
C259-268			CC45FSL1H101J	CERAMIC 100PF J		
C269			CK45FB1H102K	CERAMIC 1000PF K		
C281			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C282			CE04KW1C100M	ELECTRO 10UF 16WV		
C283,284			CC45FSL1H101J	CERAMIC 100PF J		
C285,286			CK45FB1H102K	CERAMIC 1000PF K		
C287			CE04KW1V470M	ELECTRO 47UF 35WV		
CN11			E40-4245-05	PIN ASSY (R-A100)		
CN11			E40-8126-05	PIN ASSY (R-A150)		
CN12			E40-4922-05	FLAT CABLE CONNECTOR		
CN21,22			E40-4428-05	PIN ASSY (R-A100)		
CN21,22		✻	E40-8127-05	PIN ASSY (R-A150)		
CN23			E40-4429-05	PIN ASSY (R-A100)		
CN23		✻	E40-8128-05	PIN ASSY (R-A150)		
CN24			E40-4428-05	PIN ASSY (R-A100)		
CN25			E40-4245-05	PIN ASSY (R-A100)		
CN25			E40-8126-05	PIN ASSY (R-A150)		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑰

	Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
	CN31,32			E40-4871-05	PIN ASSY		
⚠	J1			E03-0149-05	AC OUTLET	EM	
⚠	J1			E03-0310-05	AC OUTLET	T	
	J2 -4			E63-0139-15	PHONO JACK		
	J5			E11-0280-05	PHONE JACK		
	J6			E70-0053-05	LOCK TERMINAL BOARD		
⚠	F1			F05-2525-05	FUSE (SEMKO) (250V T2.5AL)	TE	
⚠	F2			F05-1222-05	FUSE (SEMKO) (250V T1.25A L)		
⚠	F5			F05-1222-05	FUSE (SEMKO) (250V T1.25A L)	M	
	CN1 ,2			J13-0075-05	FUSE CLIP	TE	
	CN3 ,4			J13-0075-05	FUSE CLIP		
	CN9 ,10			J13-0075-05	FUSE CLIP	M	
	E1 -3			J11-0808-05	WIRE CLAMPER		
	R1			RD14NB2E272J	RD 2.7K J 1/4W		
	R6			RD14NB2E6R8J	RD 6.8 J 1/4W		
	R7			RD14NB2E1R0J	RD 1 J 1/4W		
	R8			RS14KB3D821J	FL-PROOF RS 820 J 2W	TE	
	R11			RD14NB2E3R3J	RD 3.3 J 1/4W		
	R14			RD14NB2E221J	RD 220 J 1/4W		
	R15			RS14KB3D181J	FL-PROOF RS 180 J 2W		
	R18			RD14NB2E3R3J	RD 3.3 J 1/4W		
	R27			RD14NB2E150J	RD 15 J 1/4W		
	R33 ,34			RS14KB3D221J	FL-PROOF RS 220 J 2W		
	R35			RS14KB3D392J	FL-PROOF RS 3.9K J 2W		
	R47 ,48			RD14NB2E470J	RD 47 J 1/4W		
	R99			RD14NB2E4R7J	RD 4.7 J 1/4W		
	R149-152			RD14NB2E221J	RD 220 J 1/4W		
	R153,154			RD14NB2E682J	RD 6.8K J 1/4W		
	R155,156			RD14NB2E101J	RD 100 J 1/4W		
	R175-178			RD14NB2E4R7J	RD 4.7 J 1/4W		
	R179,180			RD14NB2E332J	RD 3.3K J 1/4W		
	R187,188			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
	R240			RS14KB3D680J	FL-PROOF RS 68 J 2W		
	R241-244			R92-1771-05	METAL PLATE RESISTOR		
	VR1 ,2			R12-0607-05	TRIMMING POT.(470)		
	K1 ,2			S76-0060-05	MAGNETIC RELAY		
	K3			S76-0056-05	MAGNETIC RELAY		
⚠	S1			S62-0001-05	SLIDE SWITCH	M	
	D1			S5688B	DIODE		
	D1			1SR139-400	DIODE		
	D2			HSS104A	DIODE		
	D2			1SS131	DIODE		
	D3			MTZJ2.7(B)	ZENER DIODE		
	D3			UZ-2.7BSB	ZENER DIODE		
	D5			MTZJ6.8(B)	ZENER DIODE		
	D5			UZ-6.8BSB	ZENER DIODE		
	D6 -8			S5688B	DIODE		
	D6 -8			1SR139-400	DIODE		
	D9			MTZJ16(B)	ZENER DIODE		
	D9			UZ-16BSB	ZENER DIODE		
	D10			MTZJ18(B)	ZENER DIODE		
	D10			UZ-18BSB	ZENER DIODE		
	D11 -14			S5688B	DIODE		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑱

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
D11 -14			1SR139-400	DIODE		
D15 ,16			MTZJ5.6(B)	ZENER DIODE		
D15 ,16			UZ-5.6BSB	ZENER DIODE		
D17			HSS104A	DIODE		
D17			1SS131	DIODE		
D19			MTZJ10(B)	ZENER DIODE		
D19			UZ-10BSB	ZENER DIODE		
D20			HSS104A	DIODE		
D20			1SS131	DIODE		
D21			MTZJ3.9(B)	ZENER DIODE		
D21			UZ-3.9BSB	ZENER DIODE		
D25			D5SBA20F03	DIODE		
D31 ,32			HSS104A	DIODE		
D31 ,32			1SS131	DIODE		
D35 ,36			HSS104A	DIODE		
D35 ,36			1SS131	DIODE		
D37			MTZJ5.1(B)	ZENER DIODE		
D37			UZ-5.1BSB	ZENER DIODE		
IC1			NJU7312AL	ANALOGUE IC		
IC2			NJM4565D-D	IC(OP AMP X2)		
IC3			TC9215AP	ANALOGUE IC		
IC4			TDA7466	ANALOGUE IC		
Q1			2SD2525	TRANSISTOR		
Q2			2SA1534A(R,S)	TRANSISTOR		
Q3			2SA1048(Y,GR)	TRANSISTOR	TE	
Q3			2SA1175(F,E)	TRANSISTOR	M	
Q3			2SA1309A(Q,R)	TRANSISTOR	TE	
Q3			2SA933AS(Q,R)	TRANSISTOR	M	
Q5			2SC1740S(Q,R)	TRANSISTOR	M	
Q5			2SC2458(Y,GR)	TRANSISTOR	TE	
Q5			2SC2785(F,E)	TRANSISTOR	M	
Q5			2SC3311A(Q,R)	TRANSISTOR	TE	
Q11			2SD2525	TRANSISTOR		
Q12 ,13			2SC1740S(Q,R)	TRANSISTOR	M	
Q12 ,13			2SC2458(Y,GR)	TRANSISTOR	TE	
Q12 ,13			2SC2785(F,E)	TRANSISTOR	M	
Q12 ,13			2SC3311A(Q,R)	TRANSISTOR	TE	
Q14			2SB1640	TRANSISTOR		
Q15			2SA1048(Y,GR)	TRANSISTOR	TE	
Q15			2SA1175(F,E)	TRANSISTOR	M	
Q15			2SA1309A(Q,R)	TRANSISTOR	TE	
Q15			2SA933AS(Q,R)	TRANSISTOR	M	
Q21 ,22			2SC1740S(Q,R)	TRANSISTOR	M	
Q21 ,22			2SC2458(Y,GR)	TRANSISTOR	TE	
Q21 ,22			2SC3311A(Q,R)	TRANSISTOR	TE	
Q25 ,26			2SA1048(Y,GR)	TRANSISTOR	TE	
Q25 ,26			2SA1175(F,E)	TRANSISTOR	M	
Q25 ,26			2SA1309A(Q,R)	TRANSISTOR	TE	
Q25 ,26			2SA933AS(Q,R)	TRANSISTOR	M	
Q31 ,32			2SC2878(B)	TRANSISTOR		
Q51 ,52			2SC2878(B)	TRANSISTOR		
Q53 -58			2SA992(F,E)	TRANSISTOR		
Q59 -62			2SC1845(F,E)	TRANSISTOR		
Q77 ,78			2SC1845(F,E)	TRANSISTOR		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑲

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
Q81			2SA992(F,E)	TRANSISTOR		
Q82 ,83			2SC1845(F,E)	TRANSISTOR		
Q84			2SC1740S(Q,R)	TRANSISTOR	M	
Q84			2SC2458(Y,GR)	TRANSISTOR	TE	
Q84			2SC2785(F,E)	TRANSISTOR	M	
Q84			2SC3311A(Q,R)	TRANSISTOR	TE	
Q91			2SA1048(Y,GR)	TRANSISTOR	TE	
Q91			2SA1175(F,E)	TRANSISTOR	M	
Q91			2SA1309A(Q,R)	TRANSISTOR	TE	
Q91			2SA933AS(Q,R)	TRANSISTOR	M	
Q92			2SC3940A(R,S)	TRANSISTOR		
Q93 ,94			2SC2878(B)	TRANSISTOR		
Q95			2SC1740S(Q,R)	TRANSISTOR	M	
Q95			2SC2458(Y,GR)	TRANSISTOR	TE	
Q95			2SC2785(F,E)	TRANSISTOR	M	
Q95			2SC3311A(Q,R)	TRANSISTOR	TE	
DISPLAY UNIT (X14-448x-xx)						
D3			B30-2519-05	LED(INFRARED,D=5)(R-V300/V350)		
D4			B30-2519-05	LED(INFRARED,D=5)(R-A100/A150)		
D5			B30-2519-05	LED(INFRARED,D=5)(R-V300/V350)		
D6			B30-2519-05	LED(INFRARED,D=5)(R-A100/A150)		
D7			B30-2507-05	LED(RED/GRN,D=5) (R-A150)		
D8			B30-2519-05	LED(INFRARED,D=5)(R-V300/V350)		
D9			B30-2519-05	LED(INFRARED,D=5)(R-A100/A150)		
D12			B30-2507-05	LED(RED/GRN,D=5) (R-V350)		
D32			B30-2519-05	LED(INFRARED,D=5)(R-V300/V350)		
D38			B30-2493-05	LED(RED) (R-V350)		
D41			B30-2493-05	LED(RED) (R-A100)		
D42			B30-2519-05	LED(INFRARED,D=5)(R-A100/A150)		
C2			CE04KW1A101M	ELECTRO 100UF 10WV		
C3 ,4			CK73FB1H102K	CHIP C 1000PF K		
C5			CE04KW1A101M	ELECTRO 100UF 10WV		
C6			C90-3212-05	ELECTRO 47UF 6.3WV		
C7			CF92FV1H124J	MF-C 0.12UF J		
C8			CK73FB1H102K	CHIP C 1000PF K		
C9 ,10			CC73FCH1H220J	CHIP C 22PF J		
C11			C90-3253-05	ELECTRO 1.0UF 50WV		
C12 ,13			CK73FB1H103K	CHIP C 0.010UF K		
C14			C90-3253-05	ELECTRO 1.0UF 50WV		
C15			C90-2836-05	ELECTRO 0.33UF 5.5WV		
C16			CK73EB1H104K	CHIP C 0.10UF K		
C17 ,18			CQ93FMG1H104J	MYLAR 0.10UF J	TE	
C19 ,20			CK45FF1H103Z	CERAMIC 0.010UF Z	TE	
C22			C90-3214-05	ELECTRO 100UF 6.3WV		
C23			CK45FF1H103Z	CERAMIC 0.010UF Z		
C24 -26			CK45FB1H102K	CERAMIC 1000PF K		
C29			CE04KW1A101M	ELECTRO 100UF 10WV	TE	
C30			CE04HW1H010M	NP-ELEC 1.0UF 50WV	TE	
C31			CK45FB1H102K	CERAMIC 1000PF K	TE	
C32			CE04KW1H010M	ELECTRO 1.0UF 50WV	TE	
C33			CK45FB1H471K	CERAMIC 470PF K	TE	
C38 ,39			CK45FB1H102K	CERAMIC 1000PF K		
C40 ,41	3,35		CK45FB1H471K	CERAMIC 470PF K		
C42			CE04HW1HR47M	NP-ELEC 0.47UF 50WV		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑳

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
C101			CE04KW1A101M	ELECTRO 100UF 10WV	TE	
C102			CE04KW1H010M	ELECTRO 1.0UF 50WV	TE	
C103			CE04KW1H2R2M	ELECTRO 2.2UF 50WV	TE	
C104			CC45FSL1H331J	CERAMIC 330PF J	TE	
C105			CQ93FMG1H561J	MYLAR 560PF J	TE	
C106			CE04KW1A101M	ELECTRO 100UF 10WV	TE	
C107,108			CE04KW1C220M	ELECTRO 22UF 16WV	TE	
C109			CQ93FMG1H103J	MYLAR 0.010UF J	TE	
C110,111			CK45FF1H103Z	CERAMIC 0.010UF Z	TE	
C112			CE04KW1H100M	ELECTRO 10UF 50WV	TE	
C113			CQ93FMG1H102J	MYLAR 1000PF J	TE	
C114			CK45FF1H103Z	CERAMIC 0.010UF Z	TE	
C115			CQ93FMG1H182J	MYLAR 1800PF J	TE	
C116			CC45FCH1H390J	CERAMIC 39PF J	TE	
C117			CC45FCH1H330J	CERAMIC 33PF J	TE	
C118			CE04KW1A101M	ELECTRO 100UF 10WV	TE	
C120,121			CC45FCH1H270J	CERAMIC 27PF J	TE	
CN1			E40-8123-05	FLAT CABLE CONNECTOR		
CN2 ,3			E40-3257-05	PIN ASSY		
CN4 ,5			E40-3261-05	PIN ASSY (R-A100/V350)		
CN6			E40-3249-05	PIN ASSY	TE	
CN8			E40-4294-05	FLAT CABLE CONNECTOR		
CN50			E40-3259-05	PIN ASSY	TE	
J1			E11-0280-05	PHONE JACK (R-V350)		
J1			E11-0282-05	PHONE JACK (R-V300)		
J2			E11-0188-05	MINIATURE PHONE JACK(2P)	KPMIYC	
J2			E11-0188-05	MINIATURE PHONE JACK(2P)	X	
J2			E11-0293-05	MINIATURE PHONE JACK(2P)	TE	
J3			E11-0283-05	MINIATURE PHONE JACK(3P)	TE	
J4			E63-0116-05	PHONO JACK	KPMIYC	
J4			E63-0116-05	PHONO JACK	X	
J4			E63-0164-05	PHONO JACK	TE	
-			J19-5793-13	HOLDER		
L100			L40-1091-17	SMALL FIXED INDUCTOR(1UH)	TE	
L101			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K) TE		
X1			L78-0674-05	RESONATOR		
X2			L77-2173-05	CRYSTAL RESONATOR(32.768KHZ)		
X3			L78-0284-05	RESONATOR (5MHZ)		
X100			L78-0626-05	RESONATOR (16M)	TE	
X101			L77-2200-05	CRYSTAL RESONATOR(4.332MHZ)	TE	
CP1			R90-0860-05	MULTI-COMP 4.7K X1 1		
CP2			R90-0878-05	MULTI-COMP 10KX3		
CP3			R90-0484-05	MULTI-COMP 4.7KX12 J 1/6W		
CP4			R90-0865-05	MULTI-COMP 10K X11		
R6 ,7			RK73FB2A104J	CHIP R 100K J 1/10W		
R12 ,13			RS14KB3D221J	FL-PROOF RS 220 J 2W		
R22 -25			RK73FB2A221J	CHIP R 220 J 1/10W		
R26			RK73FB2A104J	CHIP R 100K J 1/10W		
R27 ,28			RK73FB2A103J	CHIP R 10K J 1/10W		
R29			RK73EB2B103J	CHIP R 10K J 1/8W		
R30			RK73FB2A104J	CHIP R 100K J 1/10W		
R31			RK73EB2B103J	CHIP R 10K J 1/8W		
R32 -34			RK73FB2A104J	CHIP R 100K J 1/10W		
R35			RK73EB2B221J	CHIP R 220 J 1/8W		
R36			RK73FB2A472J	CHIP R 4.7K J 1/10W		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

21

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
R37			RK73FB2A104J	CHIP R 100K J 1/10W		
R38			RK73FB2A221J	CHIP R 220 J 1/10W		
R40 ,41			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R42 -47			RK73FB2A1R0J	CHIP R 1 J 1/10W		
R50			RK73EB2B104J	CHIP R 100K J 1/8W		
R51 -53			RK73FB2A221J	CHIP R 220 J 1/10W		
R55			RK73FB2A101J	CHIP R 100 J 1/10W		
R56			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R57			RK73FB2A101J	CHIP R 100 J 1/10W		
R58			RK73FB2A103J	CHIP R 10K J 1/10W		
R59			RK73FB2A101J	CHIP R 100 J 1/10W		
R60			RK73FB2A475J	CHIP R 4.7M J 1/10W		
R61			RK73FB2A101J	CHIP R 100 J 1/10W		
R62			RK73FB2A104J	CHIP R 100K J 1/10W		
R63 -68			RK73FB2A101J	CHIP R 100 J 1/10W		
R69			RK73FB2A331J	CHIP R 330 J 1/10W		
R70			RK73FB2A101J	CHIP R 100 J 1/10W		
R71 ,72			RK73FB2A104J	CHIP R 100K J 1/10W		
R73			RK73FB2A221J	CHIP R 220 J 1/10W		
R74			RK73FB2A331J	CHIP R 330 J 1/10W		
R75 ,76			RK73FB2A104J	CHIP R 100K J 1/10W		
R77			RK73EB2B751J	CHIP R 750 J 1/8W		
R78			RK73FB2A221J	CHIP R 220 J 1/10W		
R81			RK73EB2B104J	CHIP R 100K J 1/8W		
R82			RK73FB2A221J	CHIP R 220 J 1/10W		
R83			RK73FB2A474J	CHIP R 470K J 1/10W		
R84			RK73FB2A103J	CHIP R 10K J 1/10W		
R88			RK73FB2A104J	CHIP R 100K J 1/10W		
R89			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R91			RK73FB2A221J	CHIP R 220 J 1/10W		
R93			RK73EB2B103J	CHIP R 10K J 1/8W		
R94 ,95			RK73FB2A471J	CHIP R 470 J 1/10W		
R96			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R98			RK73EB2B471J	CHIP R 470 J 1/8W		
R103			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R104			RK73FB2A104J	CHIP R 100K J 1/10W		
R240			RD14NB2E101J	RD 100 J 1/4W	TE	
W200			R92-0679-05	CHIP R 0 OHM		
W201			R92-0670-05	CHIP R 0 OHM		
W202-205			R92-0670-05	CHIP R 0 OHM		
W206-216			R92-0679-05	CHIP R 0 OHM		
W217			R92-0670-05	CHIP R 0 OHM		
W218,219			R92-0679-05	CHIP R 0 OHM		
W220-223			R92-0670-05	CHIP R 0 OHM		
W224			R92-0679-05	CHIP R 0 OHM		
W225			R92-0670-05	CHIP R 0 OHM		
W226,227			R92-0679-05	CHIP R 0 OHM		
W228,229			R92-0670-05	CHIP R 0 OHM	KP	
W229			R92-0670-05	CHIP R 0 OHM	TE	
W230			R92-0679-05	CHIP R 0 OHM		
W231			R92-0670-05	CHIP R 0 OHM		
W232,233			R92-0679-05	CHIP R 0 OHM		
S1 -3			S70-0031-05	TACT SWITCH (R-V300/V350)		
S4			S70-0031-05	TACT SWITCH		
S5 ,6			S70-0031-05	TACT SWITCH (R-V350)		

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

22

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
S7 ,8			S70-0031-05	TACT SWITCH (R-A100/A150)		
S9			S70-0031-05	TACT SWITCH		
S10 ,11			S70-0031-05	TACT SWITCH (R-V300/V350)		
S12			S70-0031-05	TACT SWITCH (R-V350)		
S13			S70-0031-05	TACT SWITCH		
S14			S70-0031-05	TACT SWITCH (R-V300/V350)		
S15			S70-0031-05	TACT SWITCH (R-V350)		
S16 ,17			S70-0031-05	TACT SWITCH (R-A100/A150)		
S18			S70-0031-05	TACT SWITCH		
S19 ,20			S70-0031-05	TACT SWITCH (R-V300/V350)		
S21			S70-0031-05	TACT SWITCH (R-V350)		
S22			S70-0031-05	TACT SWITCH		
S23 ,34			S70-0031-05	TACT SWITCH (R-A100/VA10)		
S25			S70-0031-05	TACT SWITCH		
S26			S70-0031-05	TACT SWITCH		
S27			S70-0031-05	TACT SWITCH (R-V350)		
S30 -32			S70-0031-05	TACT SWITCH (R-A100/A150)		
S33			S62-0001-05	SLIDE SWITCH (R-V300)	MIY	
S28			T99-0559-05	ROTARY ENCODER(R-A100/A150)		
S29			T99-0559-05	ROTARY ENCODER(R-V300/V350)		
D1 ,2			HSS104A	DIODE		
D1 ,2			1SS131	DIODE		
D10 ,11			MA110	DIODE		
D13 -16			MA110	DIODE		
D17			S5688B	DIODE		
D17			1SR139-400	DIODE		
D18			HSS104A	DIODE		
D18			1SS131	DIODE		
D19			MA110	DIODE		
D20 -22			HSS104A	DIODE		
D20 -22			1SS131	DIODE		
D23			MA110	DIODE		
D24 -27			HSS104A	DIODE		
D24 -27			1SS131	DIODE		
D28			MA110	DIODE		
D29			HSS104A	DIODE	EMIYCX	
D29			1SS131	DIODE	EMIYCX	
D30			HSS104A	DIODE	TX	
D30			1SS131	DIODE	TX	
D31			HSS104A	DIODE (R-V300/V350)		
D31			1SS131	DIODE (R-V300/V350)		
D33			HSS104A	DIODE (R-V300)	MCIY	
D33			1SS131	DIODE (R-V300)	MCIY	
D34			HSS104A	DIODE (R-A100/A150)		
D34			1SS131	DIODE (R-A100/A150)		
D35			MTZJ6.2(B)	ZENER DIODE		
D35			UZ-6.2BSB	ZENER DIODE		
D36 ,37			HSS104A	DIODE		
D36 ,37			1SS131	DIODE		
D39 ,40			HSS104A	DIODE		
D39 ,40			1SS131	DIODE		
D43 ,44			HSS104A	DIODE	TE	
D43 ,44			1SS131	DIODE	TE	
D100-107			HSS104A	DIODE	TE	
D100-107			1SS131	DIODE	TE	

L : Scandinavia **K :** USA **P :** Canada **R :** Mexico
Y : PX(Far East, Hawaii) **T :** Europe **E :** Europe **G :** Germany
Y : AAFES(Europe) **X :** Australia **M :** Other Areas

⚠ indicates safety critical components.

PARTS LIST

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

(23)

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
ED1		✻	20U64102SA	INDICATOR TUBE		
IC1		✻	UPD780206GF025	MI-COM IC	MIYCX	
IC1		✻	UPD780206GF027	MI-COM IC	KPTE	
IC2			S-806D-Z	ANALOGUE IC		
IC3			UPD17215GT-737	MI-COM IC		
IC51			RF5S830-0021	MOS-IC	TE	
IC52			SAA6579	ANALOGUE IC	TE	
Q1 ,2			2SC3246	TRANSISTOR		
Q3 ,4			2SA1048(Y,GR)	TRANSISTOR	TE	
Q3 ,4			2SA1309A(Q,R)	TRANSISTOR	TE	
Q5			2SA1175(F,E)	TRANSISTOR	MCIY	
Q5			2SA933AS(Q,R)	TRANSISTOR	MCIY	
Q6			2SC4116(Y,GR)	TRANSISTOR		
Q7			2SC1740S(Q,R)	TRANSISTOR	MIYCX	
Q7			2SC2458(Y,GR)	TRANSISTOR	KPTE	
Q7			2SC2785(F,E)	TRANSISTOR	MIYCX	
Q7			2SC3311A(Q,R)	TRANSISTOR	KPTE	
Q8			2SC2458(Y,GR)	TRANSISTOR	TE	
Q8			2SC3311A(Q,R)	TRANSISTOR	TE	
Q10			2SC2878(B)	TRANSISTOR		
Q100			2SC2458(Y,GR)	TRANSISTOR	TE	
Q100			2SC3311A(Q,R)	TRANSISTOR	TE	
Q101			2SA1048(Y,GR)	TRANSISTOR	TE	
Q101			2SA1309A(Q,R)	TRANSISTOR	TE	
Q102			2SC2458(Y,GR)	TRANSISTOR	TE	
Q102			2SC3311A(Q,R)	TRANSISTOR	TE	
A1	3,35		W02-2598-05	OPTIC RECEIVING (R-V300/V350)		
A2	1,15		W02-2598-05	OPTIC RECEIVING (R-A100/A150)		

L : Scandinavia
Y : PX(Far East, Hawaii)
Y : AAFES(Europe)
K : USA
T : Europe
X : Australia
P : Canada
E : Europe
M : Other Areas
R : Mexico
G : Germany

⚠ indicates safety critical components.

SPECIFICATIONS

R-A100 (En/M)

Audio section

Effective output power
1kHz,10% T.H.D.,at 6 Ω.....50 W + 50 W
Rated output power
1kHz,1% T.H.D.,at 6 Ω.....40 W + 40 W
Total harmonic distortion (1 kHz, 25 W,6 Ω).....0.02 %
Frequency response
LINE (CD).....10 Hz ~ 80 kHz, +0 dB, -3 dB
Signal to noise ratio (IHF'66)
LINE (CD).....90 dB
Input sensitivity / impedance
LINE (AUX).....200 mV / 47 kΩ
Tone controls
BASS.....± 8 dB (at 100 Hz)
TREBLE.....± 8 dB (at 100 kHz)
Output level / impedance
TAPE REC.....200 mV / 2.2 kΩ
SUB WOOFER PRE OUT.....2V / 1kΩ

FM Tuner section

Tuning frequency range.....87.5 MHz ~ 108 MHz
Usable sensitivity
MONO.....1.6 µV (at 75 Ω) / 15.2 dBf
(75 kHz dev.,SINAD. 30 dB)
50dB quieting sensitivity
STEREO.....31.6 µV (at 75 Ω) / 41.2 dBf
(75 kHz dev.)
Signal to noise ratio (1 kHz, 75 kHz dev)
MONO.....73 dB (65 dBf input)
STEREO.....68 dB (65 dBf input)
Selectivity (IHF ± 400 kHz).....50 dB
Stereo separation (1 kHz).....40 dB
Frequency response .....30 Hz~15 kHz, +0.5 dB, -3.0 dB

AM Tuner section

Tuning frequency range.....(9 kHz) 531 kHz ~ 1,602 kHz
(10 kHz) 530 kHz ~ 1,610 kHz
Usable sensitivity
(30% mod., S/N 20 dB).....20 µV / (700 µV / m)
Signal to noise ratio
(at 30% mod 1 mV input).....48 dB

General

Power consumption.....100 W
AC outlet
UNSWITCHED .....2 : (Total 100 W max)
Dimensions.....W : 400 mm
H : 106 mm
D : 382 mm
Weight (net) .....6.1 kg

R-A150 (En/T)

Audio section

Rated output power
(DIN)1 kHz, 0.7% at 6 Ω.....50 W + 50 W
Total harmonic distortion (1 kHz, 25 W, 6 Ω).....0.02 %
Frequency response
LINE (CD).....10 Hz ~ 80 kHz, +0 dB, -3 dB
Signal to noise ratio (IHF'66)
LINE (CD) .....90 dB
Input sensitivity / impedance
LINE (AUX) .....200 mV / 47 kΩ
Tone controls
BASS .....± 8 dB (at 100 Hz)
TREBLE .....± 8 dB (at 100 kHz)
Output level / impedance
TAPE REC .....200 mV / 2.2 kΩ
SUB WOOFER PRE OUT.....2 V / 1 kΩ

FM Tuner section

Tuning frequency range.....87.5 MHz ~ 108 MHz
Usable sensitivity (DIN)
MONO.....1.2 µV(at 75 Ω) / 13.2 dBf
(40 kHz dev., S/N 26 dB)
STEREO .....35 µV(at 75 Ω) / 42 dBf
(46 kHz dev., S/N 46dB)
Signal to noise ratio (DIN weighted at 1kHz, 40 kHz dev.)
MONO.....65 dB (65.2 dBf input)
STEREO .....60 dB (65.2 dBf input)
Selectivity (DIN ± 300 kHz).....64 dB
Stereo separation (DIN,1 kHz) .....36 dB
Frequency response .....30 Hz ~ 15 kHz, +0.5 dB, -3.0 dB

MW Tuner section

Tuning frequency range.....531 ~ 1,602 kHz
Usable sensitivity
(30% mod., S/N 20 dB).....20 µV / (700 µV / m)
Signal to noise ratio
(at 30% mod. 1mV input).....48 dB

LW Tuner section

Tuning frequency range .....153 kHz ~ 279 kHz
Usable sensitivity
(30% mod.,S/N 20 dB).....35 µV
Signal to noise ratio
(at 30% mod. 1mV input).....45 dB

General

Power consumption.....120 W
AC outlet
UNSWITCHED .....2 : (Total 100 W max)
Dimensions.....W : 400 mm
H : 106 mm
D : 382 mm
Weight (net) .....6.1 kg

Notes

1. KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.
2. Full performance may not be exhibited in extremely cold locations (below 0 deg.C).

SPECIFICATIONS

R-V300 (U.S.A. and Canada)

Audio section

Rated output power during STEREO operation

70 watts per channel minimum RMS, both channels driven, at 6Ω from 40 Hz to 20 kHz with no more than 0.7% total harmonic distortion.(FTC)

Effective output power during SURROUND operation
- FRONT (1 kHz, 5 % T.H.D. at 6 Ω) .....70 W + 70 W
- CENTER(1 kHz, 5 % T.H.D. at 6 Ω) .....70 W
- SURROUND (1 kHz, 5 % T.H.D. at 6 Ω) .....70 W

Rated output power during SURROUND operation
- FRONT (1kHz,1% T.H.D. at 6Ω) .....45 W + 45 W
- CENTER (1kHz,1% T.H.D. at 6 Ω) .....45 W
- SURROUND (1kHz,1% T.H.D. at 3 Ω).....23 W + 23 W

Total harmonic distortion (1 kHz, 35 W, 6 Ω).....0.03 %

Frequency response
- LINE(CD).....10 Hz ~80 kHz, +0 dB, -3 dB

Signal to noise ratio (IHF'66)
- LINE (CD) .....92 dB

Input sensitivity / impedance
- LINE (AUX) .....200 mV / 47 kΩ

Tone controls
- BASS .....±8 dB(at 100 Hz)
- TREBLE .....±8 dB(at 10 kHz)

Output level / impedance
- TAPE REC .....200 mV / 2.2 kΩ
- SUB WOOFER PRE OUT.....2 V / 1 kΩ

Video section

VIDEO inputs / outputs
- (composite).....1 Vp-p / 75 Ω

FM Tuner section

Tuning frequency range.....87.5 MHz ~ 108 MHz

Usable sensitivity
- MONO.....1.6 µV(at75 Ω) / 15.2 dBf (75 kHz dev., SINAD.30 dB)

50 dB quieting sensitivity
- STEREO .....31.6 µV(75 Ω) / 41.2 dBf (75 kHz dev.)

Signal to noise ratio (1 kHz 75 kHz dev.)
- MONO.....73 dB (65 dBf input)
- STEREO .....68 dB (65 dBf input)

Selectivity (IMF±400kHz).....70 dB

Stereo separation (1kHz) .....40 dB

Frequency response .....30 Hz ~15 kHz, +0.5 dB, -3.0 dB

AM Tuner section

Tuning frequency range .....530 kHz~1,700 kHz

Usable sensitivity
- (30%mod.,S/N 20dB).....20 µV / (700 µV / m)

Signal to noise ratio
- (at 30%mod.1mV input).....48 dB

General

Power consumption.....180 W

AC outlet
- UNSWITCHED .....2 : (Total 100 W max)

Dimensions.....W : 400mm (15-3/4")
H : 140mm (5-1/2")
D : 380mm(14-15/16")

Weight(net) .....8.9 kg(19.6lb)

Notes

1. KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.
2. Full performance may not be exhibited in extremely cold locations (below 0 deg.C).

SPECIFICATIONS

R-V350

Audio section

Rated output power during STEREO operation
(DIN) 1 kHz,0.7 % at 6 Ω.....70 W +70 W
Effective output power during SURROUND operation
FRONT (1kHz,5 % T.H.D. at 6 Ω).....70 W + 70 W
CENTER(1kHz,5 % T.H.D. at 6 Ω).....70 W
SURROUND (1kHz,5 % T.H.D. at 6 Ω).....70 W
Rated output power during SURROUND operation
FRONT (1 kHz, 1 % T.H.D. at 6 Ω).....45 W + 4 5 W
CENTER (1 kHz, 1 % T.H.D. at 6 Ω).....45 W
SURROUND (1 kHz,1 % T.H.D. at 3 Ω).....23 W + 23 W
Total harmonic distortion (1 kHz, 35 W, 6 Ω).....0.03 %
Frequency response
LINE(CD).....10 Hz ~80 kHz, + 0 dB, -3 dB
Signal to noise ratio (IHF'66)
LINE (CD).....92 dB
Input sensitivity / impedance
LINE (AUX).....200 mV / 47 kΩ
Tone controls
BASS.....±8 dB(at 100 Hz)
TREBLE.....±8 dB(at 10 kHz)
Output level / impedance
TAPE REC.....200 mV / 2.2 kΩ
SUB WOOFER PRE OUT.....2 V / 1 kΩ

Video section

VIDEO inputs / outputs
(composite).....1 Vp-p / 75 Ω

FM Tuner section

Tuning frequency range.....87.5MHz ~ 108MHz
Usable sensitivity (DIN)
MONO.....1.2 µV(at75 Ω) / 13.2 dBf
(40 kHz dev., S/N 26 dB)
STEREO.....35 µV(at 75 Ω) / 42 dBf
(46 kHz dev., S/N 46 dB)
Signal to noise ratio (DIN weighted at 1 kHz,40 kHz dev.)
MONO.....65 dB (65.2 dBf input)
STEREO.....60 dB (65.2 dBf input)
selectivity (DIN ±300 kHz).....64 dB
stereo separation (DIN, 1 kHz).....36 dB
Frequency response .....30 Hz ~15 kHz, +0.5 dB, -3.0 dB

MW Tuner section

Tuning frequency range .....531 kHz~1,602 kHz
Usable sensitivity
(30% mod., S/N 20 dB).....20 µV / (700 µV / m)
Signal to noise ratio
(at 30% mod.1mV input).....48 dB

LW Tuner section

Tuning frequency range .....153 kHz~279 kHz
Usable sensitivity
(30% mod., S/N 20 dB).....35 µV
Signal to noise ratio
(at 30% mod.1mV input).....45 dB

General

Power consumption.....190 W
AC outlet
UNSWITCHED .....2 : (Total 100 W max)
Dimensions.....W : 400 mm
H : 140 mm
D : 380 mm
Weight(net) .....8.9 kg

Notes

1. KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.
2. Full performance may not be exhibited in extremely cold locations (below 0 deg.C).

R-A100/A150/V300/V350

Note:
Component and circuit are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION
14-6,Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150 Japan

KENWOOD SERVICE CORPORATION
P.O BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.
P.O BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panama, Republic de Panama

KENWOOD ELECTRONICS U.K. LIMITED
KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.
Meachelsesteenweg 418, B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.
Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD IBÉRICA S.A.
Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.
(A.C.N. 001499 074)
P.O Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.
Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T., Hong Kong

KENWOOD ELECTRONICS GULF FZE
P.O.Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS SINGAPORE PTE LTD.
No. 1 Genting Lane #02-02, KENWOOD Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD.
#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1 46300 Petaling Jaya Selangor Darul Ehsan Malaysia